

# Forma

- Monochrome style
- Mosaics supplied on mesh sheet
- Geometric mosaics

10
COLOURS

4
FINISHES

8
TILE SIZES

GRESTEC.CO.UK / 0345 130 2241



## GLAZED PORCELAIN (R10)

IPP36677DOT	IPP36677HEX5 LRV: 75	IPP36677HEX2 LRV: 80	IPP36675DOT LRV: 5	IPP36675HEX5 LRV: 5	IPP36675HEX2 LRV: 5	IPP36680HEX2 LRV: 51	IPP36679HEX2 LRV: 7	IPP36697HEX2

## UNGLAZED PORCELAIN (R10/B)

## UNGLAZED PORCELAIN (R11/C)


## GLOSS CERAMIC (-)

IPP36680DOT LRV: 54	IPP36679DOT LRV: 7	IPP36678MET LRV: 76	IPP36676MET LRV: 5

## GLAZED PORCELAIN (-)

IPP45031DOT LRV: 76	IPP45035HERB LRV: 80	IPP45032T1 LRV: 78	IPP45033BRICK	IPP45034T3	IPP45036T4	IPP45037DOT LRV: 79	IPP45038T2	IPP45041T4
IPP45042HERB	IPP45039DOT LRB:38	IPP45040BRICK	IPP45043BRICK					

SIZES (MM)	
1	DOT - 19 DIA ON 300x320x6
2	HERRINGBONE - 11x47 HERB on 275x285x6
3	T1 - 75x77 on 285x305x6
4	T2 - GLAZED OCT 56x56 / GLOSS INSERT 22x22 on 305x305x6
5	T3- 46x60 on 250x250x6
6	T4- 20x145 on 298x298x8
7	HEX5 - 51x59 on 300x300x6
8	HEX2 - 23x26 on 300x300x6
9	BRICK - 50x100 on 265x309x6
10	MET - 23x48 BEV on 300x300x6
11	MET - 23X23 BEV on 300x300x6

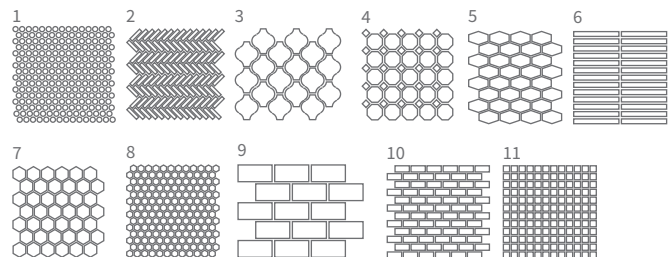

LRV VALUES VARY BATCH TO BATCH, PLEASE CONTACT FOR SPECIFIC ADVICE. SWATCH COLOURS MAY VARY, SAMPLES SHOULD BE REQUESTED.

FIND US ON:



**TECHNICAL SPECIFICATION - PORCELAIN**

TECHNICAL SPECIFICATION	STANDARD	AVERAGE VALUES
Water absorption	ISO 10545-3	0.1%
Resistance to thermal shock	ISO 10545-9	Resistant
Frost resistant	ISO 10545-12	Resistant
Resistance to chemical products	ISO 10545-13	Resistant
Colour resistant to light	DIN 51094	Resistant

**CLEANING + MAINTENANCE ADVICE - PORCELAIN****INITIAL WASHING**

The initial washing is fundamental for good treatment results. The initial washing is aimed at removing any laying residues and building grime.

Product	Deterdek (1:5 diluted in water)
Coverage	Deterdek (5 l per 100m <sup>2</sup> )
Equipment	Single-disc professional cleaner, liquid vacuum cleaner and cloth
Procedure	<ul style="list-style-type: none"> <li>• After the floor is swept and soaked with water, spread the diluted Deterdek onto the floor.</li> <li>• Then scour with single-disc professional cleaner</li> <li>• Vacuum the residue, rinse the floor well and then mop with a liquid vacuum cleaner or a cloth.</li> </ul>

**ROUTINE MAINTENANCE**

The aim of the routine maintenance is to remove dirt and scuff marks. Must be carried out regularly.

Product	Filacleaner (Diluted 1:50 in warm water)
Equipment	Cloth or mop (For large areas the use of a cleaning machine is recommended)
Procedure	<ul style="list-style-type: none"> <li>• Dilute Filacleaner in warm water</li> <li>• Wipe a cloth wet with the solution over the floor</li> <li>• Rinse the floor in case of concentrated solutions of Filacleaner</li> </ul>

**SPECIAL MAINTENANCE**

Special maintenance is carried out in case of very stubborn dirt, when the routine maintenance is not enough to restore the original look of the surface.

Product	Fila PS/87 (1:5 diluted in water)
Coverage	5 l per 100m <sup>2</sup> (when diluted 1:5)
Procedure	<ul style="list-style-type: none"> <li>• Dilute Fila PS/87 in 1:5 in water</li> <li>• Apply to the floor previously soaked with water and leave for a few minutes</li> <li>• Scrub with a single disc professional cleaner</li> <li>• Mop up residue with a liquid vacuum cleaner or cloth</li> </ul>