

# AZORE

- Price group indicated on the tile (1, 2, 3, 4, 5). Contact us for more info.
- Handmade effect
- Suitable for internal wall applications
- V3 - High shade variation

14

COLOURS




1

FINISH

2

TILE SIZE

www.grestec.co.uk | T: 0345 130 2241 | E: sales@grestec.co.uk

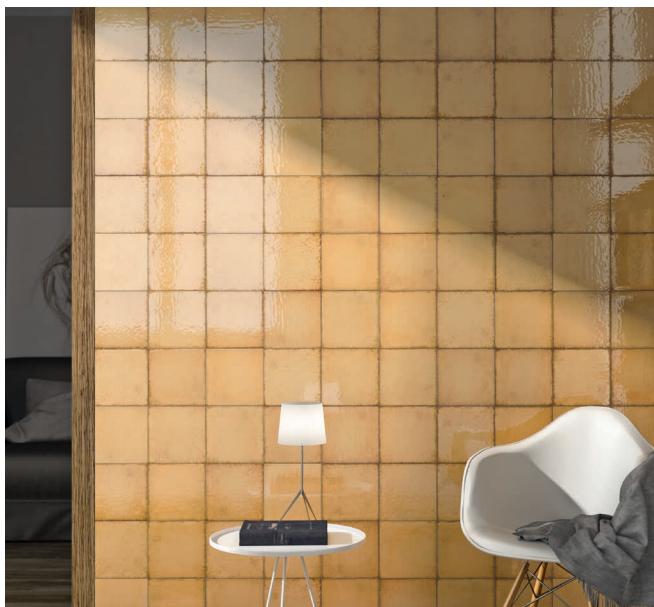SIE32272  
LRV: 63SIE32273  
LRV: 57SIE32274  
LRV: 44SIE32275  
LRV: 27SIE32276  
LRV: 18SIE32277  
LRV: 13SIE32278  
LRV: 18SIE32283  
LRV: 6SIE32282  
LRV: 29SIE32281  
LRV: 15SIE32280  
LRV: 29SIE32279  
LRV: 37

## DECOR 200x200




SIE32284






SIE322785

SIZES (mm)	> <	FINISHES	SIE32272	SIE32273	SIE32274	SIE32275	SIE32276	SIE32277	SIE32278	SIE32283	SIE32282	SIE32281	SIE32280	SIE32279
1 200x600	7.5mm	GLOSS	■	■				■	■	■				
2 200x200	7.5mm	GLOSS	■	■	■	■	■	■	■	■	■	■	■	■



LRV VALUES VARY BATCH TO BATCH PLEASE CONTACT FOR ADVICE.

SWATCH COLOURS MAY VARY, SAMPLES SHOULD BE REQUESTED. FIND US ON:

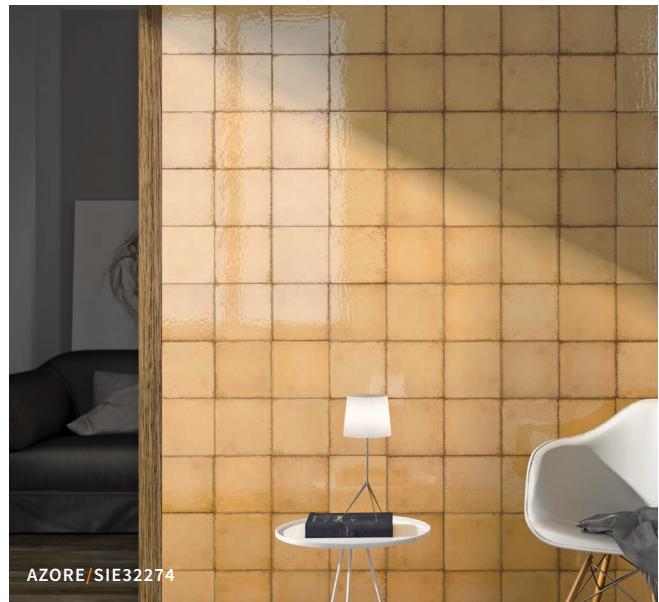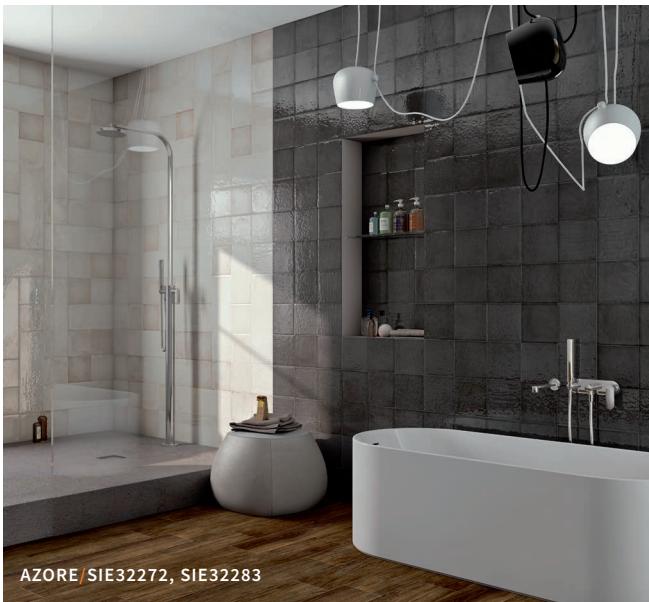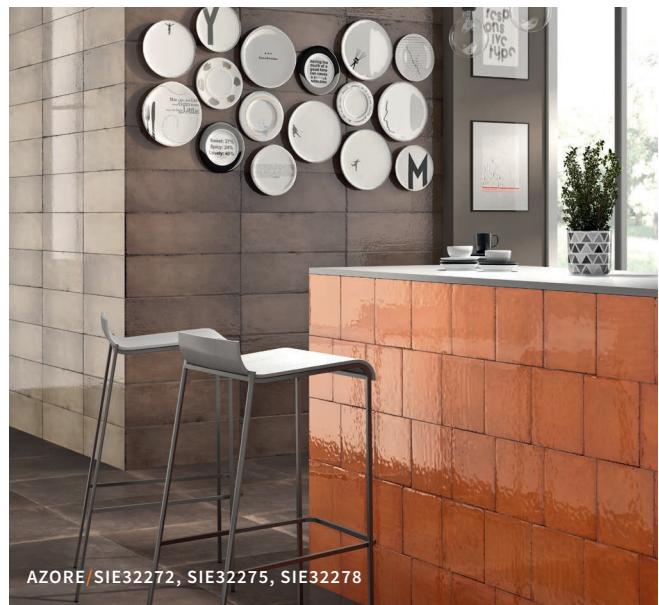

## TECHNICAL SPECIFICATION

TECHNICAL SPECIFICATION	STANDARD	AVERAGE VALUES
Sizes	ISO 10545-2	0.5% Length + width
		5% Thickness
		0.3% Linearity
		0.4% Wedging
		0.3% Warpage
Water absorption	ISO 10545-3	16%
Bending strength	ISO 10545-4	22N/mm <sup>2</sup>
Thermal expansion coefficient	ISO 10545-8	8x10-6°C-1
Resistance to thermal shock	ISO 10545-9	Resistant
Shade variation	-	V3 - High shade variation
Crazing resistance	ISO 10545-11	Resistant
Stain resistance	ISO 10545-14	Class 5

## CLEANING + MAINTENANCE ADVICE

### INITIAL WASHING

The initial washing is fundamental for good treatment results. The initial washing is aimed at removing any laying residues and building grime.

Equipment	Cloth
Procedure	<ul style="list-style-type: none"> <li>• Clean off cement stains from grouting and other building work, which once hardened, will not be removed during any normal cleaning procedure.</li> <li>• Clean wall tiling with a dry cloth when joints are hard.</li> </ul>

### ROUTINE MAINTENANCE

The aim of the routine maintenance is to remove dirt and scuff marks. Must be carried out regularly.

Product	Filacleaner (Diluted 1:50 in warm water)
Equipment	Cloth
Procedure	<ul style="list-style-type: none"> <li>• Remove dust with a dry cloth</li> <li>• Wash with FilaCleaner using a cloth that should be soaked often in the solution and wrung out well</li> </ul>