


# ABACULUS

5  
COLOURS

1  
FINISH

1  
TILE SIZE

50x50 mosaics with 80x8 scored mosaic effect and a patterned textured relief. Abaculus is suitable for internal wall and floor applications and contains 18% recycled material

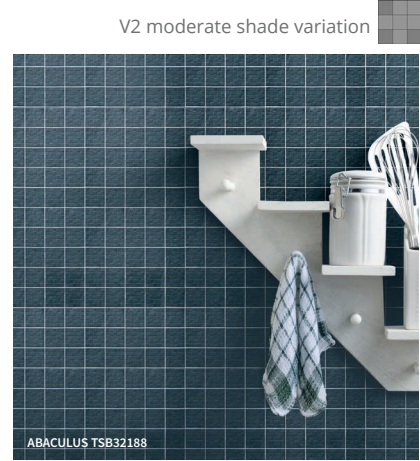


TSB32185  
LRV: 76




TSB32186  
LRV: 28



TSB32187  
LRV: 4




TSB32188  
LRV: 5



TSB32189  
LRV: 20

50x50 MOSAIC WITH 8x8 SCORED MOSAIC EFFECT SUPPLIED ON 316x316 MESH SHEET

1



	SIZE (mm)	>  <	FINISHES
1	50x50 MOS WITH SCORED 8x8 MOS on 316x316 MESH	5mm	MATT (R10) / PTV L ●

LRV and PTV values can vary batch to batch, please contact for advice.  
Swatch colours may vary, samples should be requested.  
Find us on:



## TECHNICAL DATA SHEET - ISO 10545 AVERAGE VALUES

<b>3</b>	Water absorption	<b>Conforms</b>	<b>13</b>	Chemical resistance	<b>GLA to GLB</b>
<b>6</b>	Resistance to deep abrasion	<b>&lt;140mm<sup>3</sup></b>	<b>14</b>	Stain resistance	<b>Class 5</b>
<b>8</b>	Linear thermal expansion	<b>&lt;9 (MK)-1</b>		Slip resistance DIN 51130 Slip resistance DIN 51097	<b>MATT - R10</b>
<b>9</b>	Thermal shock resistance	<b>Resistant</b>		Pendulum test results	<b>PTV L (Low slip potential)</b>
<b>12</b>	Frost resistance	<b>Resistant</b>			

## SUSTAINABILITY INFORMATION



## CLEANING + MAINTENANCE ADVICE

### INITIAL WASHING

The initial washing is fundamental for good treatment results. The initial washing is aimed at removing any laying residues and building grime.

**Product: Deterdek**

### ROUTINE MAINTENANCE

The aim of the routine maintenance is to remove dirt and scuff marks. Must be carried out regularly.

**Product: FilaCleaner**

### SPECIAL MAINTENANCE

Special maintenance is carried out in case of very stubborn dirt, when the routine maintenance is not enough to restore the original look of the surface.

**Product: Fila PS/87**

*Please see [www.filasolutions.com](http://www.filasolutions.com) for methods of use, dilution and coverage.*

