


Material: **Porcelain** | Appearance: **Terrazzo** | Application: **Walls and floors**



Cocoon

Terrazzo effect porcelain suitable for internal wall and floors and external wall applications. Cocoon contains at least 18% recycled material.

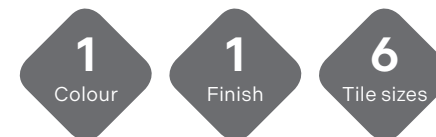


Shade variation: V2 - moderate



TMMP32160
LRV: 60

	Sizes (mm)	> <	Finishes
1	600x1200	9.5mm	NAT R10 \geq 36 PTV
2	600x600	9.5mm	NAT R10 \geq 36 PTV
3	300x600	9.5mm	NAT R10 \geq 36 PTV
4	300x300	9.5mm	NAT R10 \geq 36 PTV
5	150x150	9.5mm	NAT R10 \geq 36 PTV
6	50x50 MOS on 300x300 MESH	9.5mm	NAT R10 \geq 36 PTV
7	300x600 ST **	9.5mm	NAT R10 \geq 36 PTV
8	50x600 SK	9.5mm	NAT R10 \geq 36 PTV



LRV and PTV values can vary batch to batch, please contact for advice.
Swatch colours may vary, samples should be requested.

www.grestec.co.uk | T: 0345 130 2241 | E: sales@grestec.co.uk

Find us on:



Cocoon

Technical data sheet - ISO 10545 average values

2	Sizes	Conforms
3	Water absorption	Conforms
4	Bending strength	53 N/mm ²
6	Deep abrasion resistance	<150mm ³
8	Coefficient of linear thermal expansion	<9MK-1
9	Thermal shock resistance	Resistant
12	Frost resistance	Resistant
13	Chemical resistance	ULA to ULB
14	Stain resistance	Class 5
	Pendulum test - Slider 96 (Shod) Wet	≥36 PTV

Sustainability information



Cleaning and maintenance advice

Initial washing

The initial washing is fundamental for good treatment results. The initial washing is aimed at removing any laying residues and building grime.
Product: Deterdek Pro

Routine maintenance

The aim of the routine maintenance is to remove dirt and scuff marks. Must be carried out regularly.
Product: Cleaner Pro

Special maintenance

Special maintenance is carried out in case of very stubborn dirt, when the routine maintenance is not enough to restore the original look of the surface.
Product: PS/87 Pro

Please see www.filasolutions.com for methods of use, dilution and coverage.