

Material: **Porcelain** | Appearance: **Terrazzo and marble** | Application: **Walls and floors**



Cocoon


Terrazzo and marble effect porcelain suitable for internal wall and floors and external wall applications. Cocoon contains at least 18% recycled material.




Shade variation: V2 - moderate



Terrazzo effect | NAT R10 / ≥ 36 PTV



TTMMP32160
LRV: 60




TTMMP32161
LRV: 31




TTMMP32162
LRV: 13


Terrazzo effect | BRU R10



TTAD48657BRU




TTAD48658BRU




TTAD48659BRU

Marble effect | NAT R10 / ≥ 25 PTV, Polished



TMRM32151
BMR32151POL
LRV: 42



TMRM32152
BMR32152POL
LRV: 9







TTMMP32160 TMRM32151



LRV and PTV values can vary batch to batch, please contact for advice.
Swatch colours may vary, samples should be requested.

www.grestec.co.uk | T: 0345 130 2241 | E: sales@grestec.co.uk

Find us on:    




Cocoon



Formats

	Sizes (mm)	> <	TMMP32160	TMMP32161	TMMP32162	TTAD48657BRU	TTAD48658BRU	TTAD48659BRU	TMRM32151	TMRM32151POL	TMRM32152	TMRM32152POL
1	600x1200	9.5mm										
2	600x600	9.5mm										
3	300x600	9.5mm										
4	300x300	9.5mm										
5	150x150	9.5mm										
6	50x50 MOS on 300x300 MESH	9.5mm										
7	300x600 ST **	9.5mm										
8	50x600 SK	9.5mm										

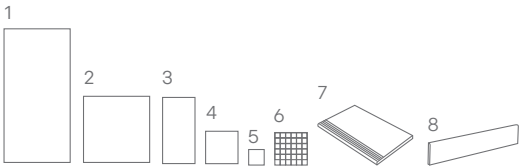

LRV and PTV values can vary batch to batch, please contact for advice.
Swatch colours may vary, samples should be requested.

Material: **Porcelain** | Appearance: **Terrazzo and marble** | Application: **Walls and floors**



Cocoon



Above
Floor: TMMP32161




Right
Floor: TMMP32162



Above
Floor: TMRM32151

LRV and PTV values can vary batch to batch, please contact for advice.
Swatch colours may vary, samples should be requested.

www.grestec.co.uk | T: 0345 130 2241 | E: sales@grestec.co.uk

Find us on:    



Cocoon

Technical data sheet - ISO 10545 average values

2	Sizes	Conforms
3	Water absorption	Conforms
4	Bending strength	53 N/mm ²
6	Deep abrasion resistance	<150mm ³
8	Coefficient of linear thermal expansion	<9MK-1
9	Thermal shock resistance	Resistant
12	Frost resistance	Resistant
13	Chemical resistance	ULA to ULB
14	Stain resistance	Class 5
	Slip resistance	Nat R10 Stone: ≥36 PTV WET Marble: ≥25 PTV WET

Sustainability information



Cleaning and maintenance advice

Initial washing

The initial washing is fundamental for good treatment results. The initial washing is aimed at removing any laying residues and building grime.
Product: Deterdek Pro

Routine maintenance

The aim of the routine maintenance is to remove dirt and scuff marks. Must be carried out regularly.
Product: Cleaner Pro

Special maintenance

Special maintenance is carried out in case of very stubborn dirt, when the routine maintenance is not enough to restore the original look of the surface.
Product: PS/87 Pro

Please see www.filasolutions.com for methods of use, dilution and coverage.