


Material: **Porcelain** | Appearance: **Monocolour** | Application: **Walls and floors**
























# Delos


Expansive range of coloured 25x25mm full-bodied porcelain mosaics. Suitable for wall and floor applications.



Shade variation: V2 moderate



							
CIM34907 LRV: 63	CIM34981 LRV: 47	CIM34982 LRV: 19	CIM34924 LRV: 6	CIM34984 LRV: 11	CIM34910 LRV: 22	CIM34983 LRV: 48	CIM34921 LRV: 30
							
CIM34914 LRV: 43	CIM34986 LRV: 23	CIM34987 LRV: 13	CIM34913 LRV: 18	CIM34909 LRV: 32	CIM34985 LRV: 45	CIM34917 LRV: 23	CIM34911 LRV: 45
							
CIM34915 LRV: 34	CIM34979 LRV: 35	CIM34980 LRV: 23	CIM34923 LRV: 7	CIM34908 LRV: 41			



Sizes (mm)

Thickness



1 25x25 mosaics on 300x300 mesh-back sheet

3.5





Natural ≥40 PTV

Natural ≥40 PTV



LRV and PTV values can vary batch to batch, please contact for advice. PTV values refer to Slider 96 Shod - Wet (unless stated). Swatch colours may vary, samples should be requested.

www.grestec.co.uk | T: 0345 130 2241 | E: sales@grestec.co.uk

Find us on:    

Material: **Porcelain** | Appearance: **Mix mosaics** | Application: **Walls and floors**

**37**  
Colours

**1**  
Finish


**1**  
Tile size

# Delos Mix


Expansive range of coloured 25x25mm full-bodied porcelain mosaics. Suitable for wall and floor applications.




Shade variation: V2 moderate



CIM56022




CIM56023



CIM56024




CIM56025




CIM56026




CIM56027




CIM56028




CIM56029




CIM56030




CIM56031




CIM56032




CIM56033




CIM56034



CIM56035




CIM56036



CIM56037

1



**Sizes (mm)**

**Thickness**




Natural ≥40 PTV



Natural ≥40 PTV

1 25x25 mosaics on 300x300 mesh-back sheet

3.5

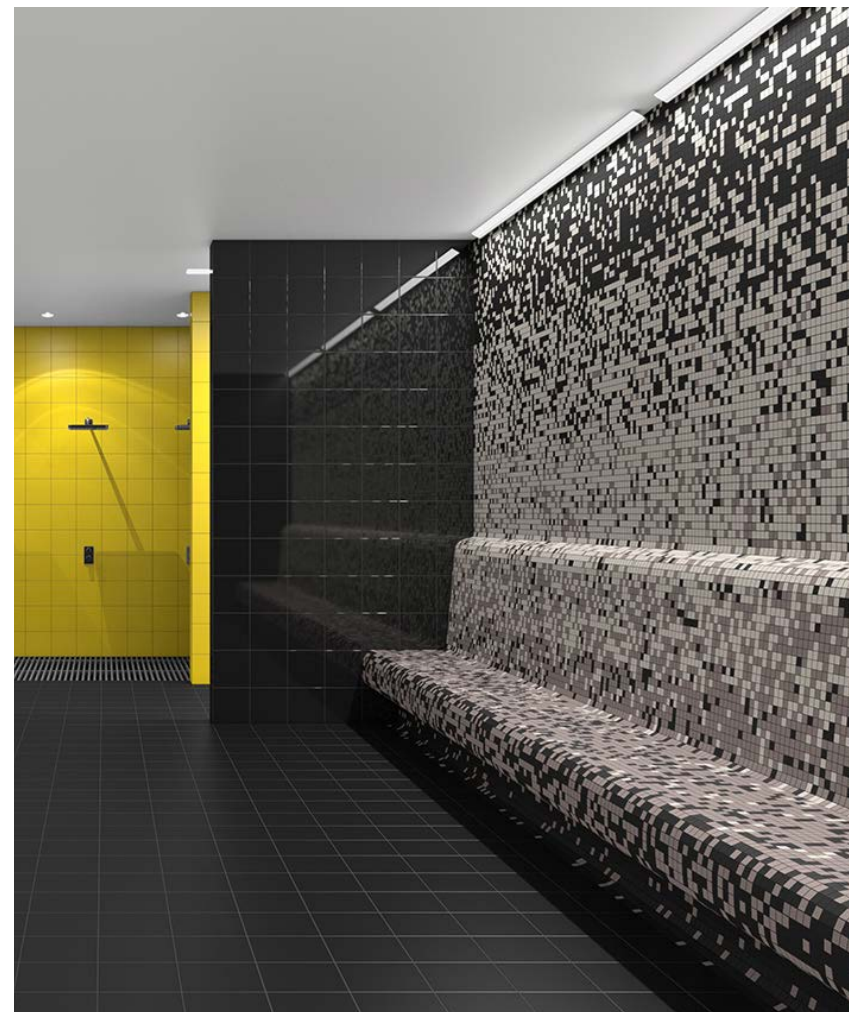

LRV and PTV values can vary batch to batch, please contact for advice. PTV values refer to Slider 96 Shod - Wet (unless stated). Swatch colours may vary, samples should be requested.

www.grestec.co.uk | T: 0345 130 2241 | E: sales@grestec.co.uk

Find us on:



# Delos

## Technical data sheet - ISO 10545 average values

2	Sizes	10% : Thickness 0.75%: Rectangularity 1%: Straightness
3	Water absorption	<0.5%
4	Bending strength	1100-2200N/mm <sup>2</sup>
6	Deep abrasion resistance	<140 mm <sup>3</sup>
8	Coefficient of linear thermal expansion	6.9x7.0x10-6°C-1
9	Thermal shock resistance	Conforms
12	Frost resistance	Conforms
13	Chemical resistance	ULA
14	Stain resistance	Class 3
	Pendulum test - Slider 96 (Shod)	Natural ≥40PTV
	Pendulum test - Slider 55 (Barefoot)	Natural ≥40PTV

## Sustainability information



### Cleaning and maintenance advice

#### Initial washing

The initial washing is fundamental for good treatment results. The initial washing is aimed at removing any laying residues and building grime.

Product: Deterdek Pro

#### Routine maintenance

The aim of the routine maintenance is to remove dirt and scuff marks. Must be carried out regularly.

Product: Cleaner Pro

#### Special maintenance

Special maintenance is carried out in case of very stubborn dirt, when the routine maintenance is not enough to restore the original look of the surface.

Product: PS/87 Pro

Please see [www.filasolutions.com](http://www.filasolutions.com) for methods of use, dilution and coverage.