

Material: **Porcelain** | Appearance: **Stone** | Application: **Walls and floors**

Design Stone

Design Stone is a project designed for indoor and outdoor spaces with a sophisticated and modern identity, and is suitable for heavy traffic areas.



Shade variation: V3 - High



TTT30358



TTT30359



TTT30360



TTT30361



TTT30358CHISTHK



TTT30359CHISTHK



TTT30360CHISTHK



TTT30361CHISTHK



LRV and PTV values can vary batch to batch, please contact for advice.
Swatch colours may vary, samples should be requested.



www.grestec.co.uk | T: 0345 130 2241 | E: sales@grestec.co.uk

Find us on:    




Design Stone



Formats

	Sizes (mm)	> <	Finishes		
1	1200x1200 THN	7.3mm	NAT (R10)	-	-
2	600x1200 THN	7.3mm	NAT (R10)	-	-
3	600x600 THK	20mm	-	CHISTHK (R11/B)	
4	600x600	9mm	NAT (R10)	-	CHIS (R11/B)
5	300x600	9mm	NAT (R10)	-	CHIS (R11/B)
6	150x600	9mm	NAT (R10)	-	-
7	100x600	9mm	NAT (R10)	-	CHIS (R11/B)
8	50x600	9mm	NAT (R10)	-	CHIS (R11/B)
9	100x100	9mm	NAT (R10)	-	CHIS (R11/B)
10	RANDOM MOS on 300x600	9mm	NAT (R10)	-	CHIS (R11/B)
11	50x50 MOS on 300x300	9mm	NAT (R10)	-	-
12	25x50 MOS on 300x300	9mm	NAT (R10)	-	CHIS (R11/B)
13	300x600 ST	9mm	NAT (R10)	-	CHIS (R11/B)
14	50x600 SK	9mm	NAT (R10)	-	CHIS (R11/B)
15	50x300 SK	9mm	NAT (R10)	-	CHIS (R11/B)

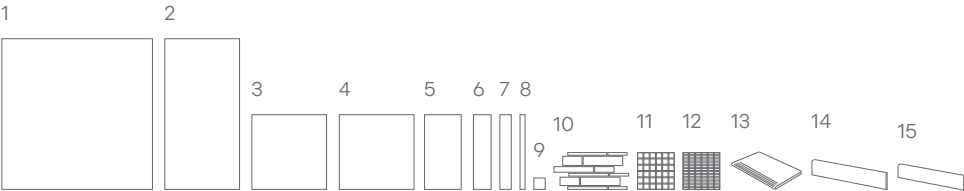

LRV and PTV values can vary batch to batch, please contact for advice.
Swatch colours may vary, samples should be requested.

Material: **Porcelain** | Appearance: **Stone** | Application: **Walls and floors**



Design Stone



Above
Floor: TTT30360

Right
Floor: TTT30361THK



Above
Wall: TTT30359
Floor: TTT30359

LRV and PTV values can vary batch to batch, please contact for advice.
Swatch colours may vary, samples should be requested.

www.grestec.co.uk | T: 0345 130 2241 | E: sales@grestec.co.uk

Find us on:    



Design Stone

Technical data sheet - ISO 10545 average values

2	Sizes	Conforms
3	Water absorption	Conforms
4	Modulus of rupture	Conforms
4	Bending strength	Conforms
6	Resistance to deep abrasion	<150mm ³
8	Linear thermal expansion	6.2 MK-1
9	Thermal shock resistance	Resistant
12	Frost resistance	Resistant
13	Chemical resistance	Conforms
14	Frost resistance	CResistant
	Slip resistance DIN 51130/ DIN 51097	NAT: R10 STR: R11/B CHITHK: R11/B

Sustainability information



Cleaning and maintenance advice

Initial washing

The initial washing is fundamental for good treatment results. The initial washing is aimed at removing any laying residues and building grime.

Product: Deterdek Pro

Routine maintenance

The aim of the routine maintenance is to remove dirt and scuff marks. Must be carried out regularly.

Product: Cleaner Pro

Special maintenance

Special maintenance is carried out in case of very stubborn dirt, when the routine maintenance is not enough to restore the original look of the surface.

Product: PS/87 Pro

Please see www.filasolutions.com for methods of use, dilution and coverage.