

EWELL

- Suitable for internal wall applications
- Ceramic tiles
- Neutral shade

9
COLOURS

2
FINISHES

5
TILE SIZE

www.grestec.co.uk | T: 0345 130 2241 | E: sales@grestec.co.uk



GLOSS



QTG39100
LRV: 73



QTG39163



QTG39164



QTG39103
LRV: 0



QTG39167



QTG39166



QTG39102
LRV: 53




QTG39162



QTG39108
LRV: 82

MATT

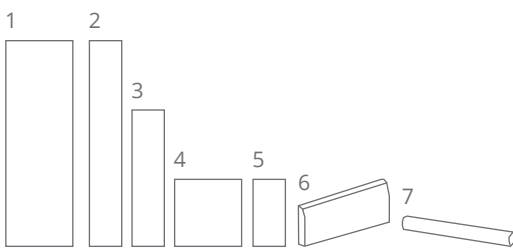

	SIZES (mm)	> <	QTG39100	QTG39163	QTG39164	QTG39103	QTG39167	QTG39166	QTG39102	QTG39162	QTG39108
1	132x400	9mm	☐								■
2	65x400	9mm	☐	■							■
3	65x266	9mm	☐		■	■	■	■	■	■	■
4	132x132	9mm	☐								■
5	65x132	9mm	☐	■	■	■	■	■	■	■	■
6	65x266 BULLNOSE LINEARE	9mm	☐	■	■	■	■	■	■	■	■
7	12x266 JOLLY	9mm	☐	■	■	■	■	■	■	■	■

SWATCH COLOURS MAY VARY, SAMPLES SHOULD BE REQUESTED. FIND US ON:    



TECHNICAL SPECIFICATION

TECHNICAL SPECIFICATION	STANDARD	AVERAGE VALUES
Sizes	ISO 10545-2	Conforms
Water absorption	ISO 10545-3	Conforms
Bending strength	ISO 10545-4	Conforms
Resistant to thermal shock	ISO 10545-9	Resistant
Crazing resistance	ISO 10545-11	Resistant
Resistance to chemical products	ISO 10545-13	Resistant
Stain resistance	ISO 10545-14	Class 5
Resistance to light	DIN 51094	Resistant

CLEANING + MAINTENANCE ADVICE

INITIAL WASHING

The initial washing is fundamental for good treatment results. The initial washing is aimed at removing any laying residues and building grime.

Equipment	Cloth
Procedure	<ul style="list-style-type: none"> • Clean off cement stains from grouting and other building work, which once hardened, will not be removed during any normal cleaning procedure. • Clean wall tiling with a dry cloth when joints are hard.

ROUTINE MAINTENANCE

The aim of the routine maintenance is to remove dirt and scuff marks. Must be carried out regularly.

Product	Filacleaner (Diluted 1:50 in warm water)
Equipment	Cloth
Procedure	<ul style="list-style-type: none"> • Remove dust with a dry cloth • Wash with FilaCleaner using a cloth that should be soaked often in the solution and wrung out well