

Material: **Porcelain** | Appearance: **Concrete effect** | Application: **Walls and Floors**



Millan


A new interpretation within concrete look, that is minimalist and contemporary, with a material that offers high-level performances and a style suitable for architectural and interior designs. Millan collection comes in 5 colours, with cooler and warmer shades of grey and several sizes, with full continuity.



Shade variation: V2 moderate



10mm THK



TMKK32153
LRV: 54



TMKK32154
LRV: 29



TMKK32155
LRV: 12




TMKK32156
LRV: 35



TMKK32157
LRV: 22

20mm THK



TMKK32153THK
900x900x20



TMKK32154THK
900x900x20
600x600x20







TMKK32157THK
600x600x20



LRV and PTV values can vary batch to batch, please contact for advice.
Swatch colours may vary, samples should be requested.

www.grestec.co.uk | T: 0345 130 2241 | E: sales@grestec.co.uk

Find us on:    



Millan




TMKK32157THK

Formats

	Sizes (mm)	> <	Finishes		
1	1200x2800	6mm	BRU (R10)	-	-
2	1200x1200	6mm	BRU (R10)	-	-
3	600x1200	6mm	BRU (R10)	-	-
4	900x900 THK *	20mm	-	-	THK (R11/B) ≥36 PTV
5	900x900	10mm	BRU (R10) ≥25 PTV	NAT (R11/B) ≥36 PTV	-
6	450x900	10mm	BRU (R10) ≥25 PTV	-	-
7	600x600	10mm	BRU (R10) ≥25 PTV	NAT (R11/B) ≥36 PTV	-
8	600x600 THK *	20mm	-	-	THK (R11/B) ≥36 PTV
9	300x600	10mm	BRU (R10) ≥25 PTV	NAT (R11/B) ≥36 PTV	-
10	200x600	10mm	BRU (R10) ≥25 PTV	-	-
11	100x600	10mm	BRU (R10) ≥25 PTV	-	-
12	75x380	10mm	BRU (R10) ≥25 PTV	-	-
13	100x100	10mm	BRU (R10) ≥25 PTV	-	-
14	30x30 MOS on 300x300 MESH	10mm	BRU (R10) ≥25 PTV	NAT (R11/B) ≥36 PTV	-
15	300x600 BRK-MOS	10mm	BRU (R10) ≥25 PTV	-	-
16	300x300 FRE 3D MOS (FRE)	10mm	BRU (R10) ≥25 PTV	-	-
17	50x600/900 SK	10mm	BRU (R10) ≥25 PTV	-	-
18	300x600 ST	10mm	BRU (R10) ≥25 PTV	-	-
19	300x600/ 450x900 ST THK	20mm	-	-	THK (R11/B) ≥36 PTV
20	340x900 ST	10mm	BRU (R10) ≥25 PTV	-	-
21	150x600x40 / 150x900x40 L-EDGING TILE	20mm	-	-	THK (R11/B) ≥36 PTV

* See page 1 for 20mm thick colour/size availability

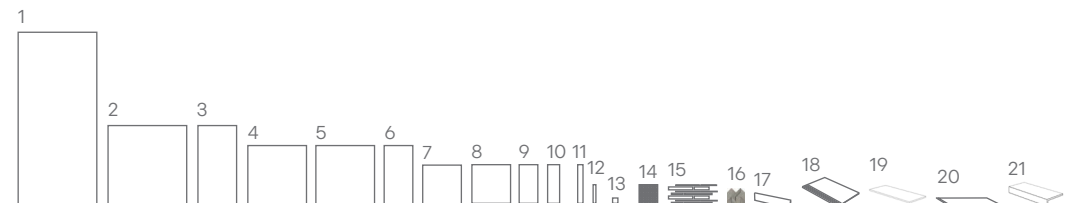



Millan



Above
TMKK32153, TMKK32154

Right
TMKK32154



Above
TMKK32157



Millan

Technical data sheet - ISO 10545 average values

2	Sizes	Conforms
3	Water absorption	Conforms
4	Bending strength	Conforms
6	Scratch resistance	< 150 mm ³
8	Coefficient of linear thermal expansion	<9MK-1
9	Thermal shock resistance	Resistant
12	Frost resistance	Resistant
13	Chemical resistance	ULA-ULB
14	Stain resistance	Class 5
	Slip resistance	NAT R11 ≥36 PTV BRU R10 ≥25 PTV

Sustainability information



Cleaning and maintenance advice

Initial washing

The initial washing is fundamental for good treatment results. The initial washing is aimed at removing any laying residues and building grime.

Product: Deterdek Pro

Routine maintenance

The aim of the routine maintenance is to remove dirt and scuff marks. Must be carried out regularly.

Product: Cleaner Pro

Special maintenance

Special maintenance is carried out in case of very stubborn dirt, when the routine maintenance is not enough to restore the original look of the surface.

Product: PS/87 Pro

Please see www.filasolutions.com for methods of use, dilution and coverage.