Crackle glaze tiles suitable for internal wall applications.












EJK40923

EJK40924



EJK40927 LRV: 0









EJK40928

EJK40929 LRV: 41

EJK40930 LRV: 49

EJK40936 LRV: 46









EJK40935 LRV: 32

EJK40934 LRV: 9

EJK40933 LRV: 0

EJK40931 LRV: 12









EJK40932 LRV: 41

EJK40938

EJK40937 LRV: 25

EJK40925













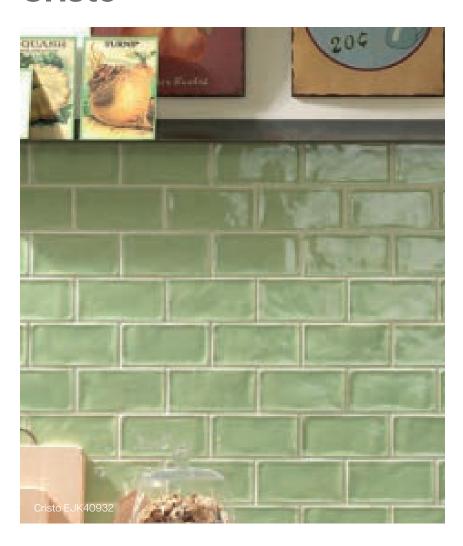

Formats

	SIZE (mm)	> <	FINISH	EJK40923	EJK40924	EJK40926	EJK40927	EJK40928	EJK40929	EJK40930	EJK40936	EJK40935	EJK40934	EJK40933	EJK40931	EJK40932	EJK40938	EJK40937	EJK40925
1	100x300	8.5mm	GLOSS									30			7			-	
2	100x300 BEV	10mm	GLOSS									4							
3	150x150	7mm	GLOSS				-					4			7			-,-	
4	75x150	7mm	GLOSS							7		4			7			-,-	

















Cleaning and maintenance advice

Before grouting

A pre grout protector Fila PRW200 is advised to protect the tiles; this is a temporary seal that when cleaning the grout will wash off.

Initial washing

The initial washing is fundamental for good treatment results. The initial washing is aimed at removing any laying residues and building grime.

Product: Cloth

Impregnating

It is also recommended to seal the body of the tiles with Fila MP90.

Routine maintenance

The aim of the routine maintenance is to remove dirt and scuff marks. Must be carried out regularly. Product: Cleaner Pro

Please see www.filasolutions.com for methods of use, dilution and coverage.

Sustainability information



