


Material: **Porcelain** | Appearance: **Cement** | Application: **Walls and floors**



Southbank

Southbank embodies abstract minimalism. The typical minimalist mark of cement but with on softer nuances, played on tones that range from ivory to hazelnut.



Shade variation: V2 moderate



IMQ44967
LRV: 48



IMQ44968
LRV: 34



IMQ44969
LRV: 30



IMQ44970
LRV: 18



IMQ44971
LRV: 12



IMQ46450
LRV: 58



IMQ46451
LRV: 45



IMQ46452
LRV: 37




IMQ46453
LRV: 29



IMQ46454
LRV: 24


HOL6 1200x2600




IMQ44967HOL6




IMQ44968HOL6



IMQ44969HOL6



IMQ44970HOL6



IMQ44971HOL6


HOL 4 600x1200



IMQ44967HOL4



IMQ44968HOL4



IMQ44969HOL4



IMQ44970HOL4







IMQ44971HOL4



LRV and PTV values can vary batch to batch, please contact for advice.
Swatch colours may vary, samples should be requested.

www.grestec.co.uk | T: 0345 130 2241 | E: sales@grestec.co.uk

Find us on:    




Southbank



Formats

	Sizes (mm)	> <	Finishes	IMQ44967	IMQ44968	IMQ44969	IMQ44970	IMQ44971	IMQ46450	IMQ46451	IMQ46452	IMQ46453	IMQ46454
1	1200x2600	6.5mm	NAT (R10) ≥36 PTV	-									
2	1200x1200	6.5mm	NAT (R10) ≥36 PTV	-									
3	1200x1200	10mm	NAT (R10) ≥36 PTV	-									
4	600x1200	6.5mm	NAT (R10) ≥36 PTV	-									
5	600x1200	10mm	NAT (R10) ≥36 PTV	HAM (R11/B) ≥36 PTV									
6	900x900	10mm	NAT (R10) ≥36 PTV	-									
7	900x900 THK	20mm	-	THK (R11/B) ≥36 PTV									
8	450x900	10mm	NAT (R10) ≥36 PTV	-									
9	600x600	10mm	NAT (R10) ≥36 PTV	-									
10	600x600 THK	20mm	-	THK (R11/B) ≥36 PTV									
11	300x600	10mm	NAT (R10) ≥36 PTV	-									
12	50x50 MOS 300x300 MESH	10mm	NAT (R10) ≥36 PTV	-									
13	ST 325x1200	10mm	NAT (R10) ≥36 PTV	-									
14	SK 60x1200/ 900 /600 /450	10mm	NAT (R10) ≥36 PTV	-									

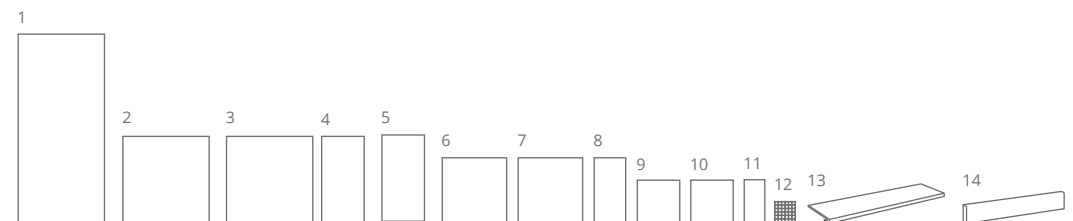

Material: **Porcelain** | Appearance: **Cement** | Application: **Walls and floors**



Southbank



LRV and PTV values can vary batch to batch, please contact for advice.
Switch colours may vary, samples should be requested.

www.grestec.co.uk | T: 0345 130 2241 | E: sales@grestec.co.uk

Find us on:    



Southbank

Technical data sheet - ISO 10545 average values

2	Sizes	Conforms
3	Water absorption	< 0,1%
4	Breaking strength	6.5 mm 1800 N* 10 mm 3000 N* 20 mm 13000 N*
6	Resistance to deep abrasion	<140 mm3
8	Coefficient of linear thermal expansion	≤ 7x10 ⁻⁶ °C ⁻¹
9	Thermal shock resistance	Resistant
12	Frost resistance	Resistant
13	Chemical resistance	
	Household chemicals and swimming pool water cleansers	min. B
	Acid and low concentration alkalis	FROM LA, LB TO LC
14	Stain resistance	Class 3
	Slip resistance	NAT R10 HAM R11/B THK R11/C Over 36 PTV

Sustainability information



Cleaning and maintenance advice

Initial washing

The initial washing is fundamental for good treatment results. The initial washing is aimed at removing any laying residues and building grime.

Product: Deterdek Pro

Routine maintenance

The aim of the routine maintenance is to remove dirt and scuff marks. Must be carried out regularly.

Product: Cleaner Pro

Special maintenance

Special maintenance is carried out in case of very stubborn dirt, when the routine maintenance is not enough to restore the original look of the surface.

Product: PS/87 Pro

Please see www.filasolutions.com for methods of use, dilution and coverage.