

Paternoster

- Ceramic
- Suitable for wall applications
- Arabesque shape

10
COLOURS


2
FINISHES

1
TILE SIZE

GRETEC.CO.UK / 0345 130 2241



GLOSS

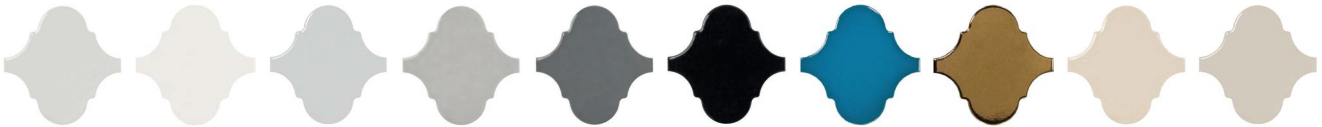


PQQ40808 PQQ43943 PQQ43942 PQQ40811 PQQ40812 PQQ40810 PQQ43918 PQQ43919 PQQ40813 PQQ43944

MATT



PQQ40807 PQQ40809

	SIZE (MM)	THICKNESS	FINISHES	
1	120x120	9MM	MATT	GLOSS



REQUEST SAMPLES, PRINT COLOURS MAY VARY. FIND US ON:



TECHNICAL SPECIFICATION

TECHNICAL CHARACTERISTIC	STANDARD	AVERAGE VALUES
Water absorption	ISO 10545-3	<10%
Bending strength	ISO 10545-4	>600N
Scratch hardness	EN 101	3
Resistance to thermal shock	ISO 10545-9	Conforms
Cracking resistance	ISO 10545-11	Conforms
Resistance to chemical products	ISO 10545-13	Conforms
Stain resistance	ISO 10545-14	5

CLEANING + MAINTENANCE ADVICE

INITIAL WASHING

The initial washing is fundamental for good treatment results. The initial washing is aimed at removing any laying residues and building grime.

Equipment	Cloth
Procedure	<ul style="list-style-type: none">• Clean off cement stains from grouting and other building work, which once hardened, will not be removed during any normal cleaning procedure.• Clean wall tiling with a dry cloth when joints are hard.

ROUTINE MAINTENANCE

The aim of the routine maintenance is to remove dirt and scuff marks. Must be carried out regularly.

Product	Filacleaner (Diluted 1:50 in warm water)
Equipment	Cloth
Procedure	<ul style="list-style-type: none">• Remove dust with a dry cloth• Wash with FilaCleaner using a cloth that should be soaked often in the solution and wrung out well