

Serano

- Mosaics
- Also available in an anti-slip finish in some colours

32

COLOURS


1

FINISH


4

TILE SIZES

GRESTEC.CO.UK / 0345 130 2241

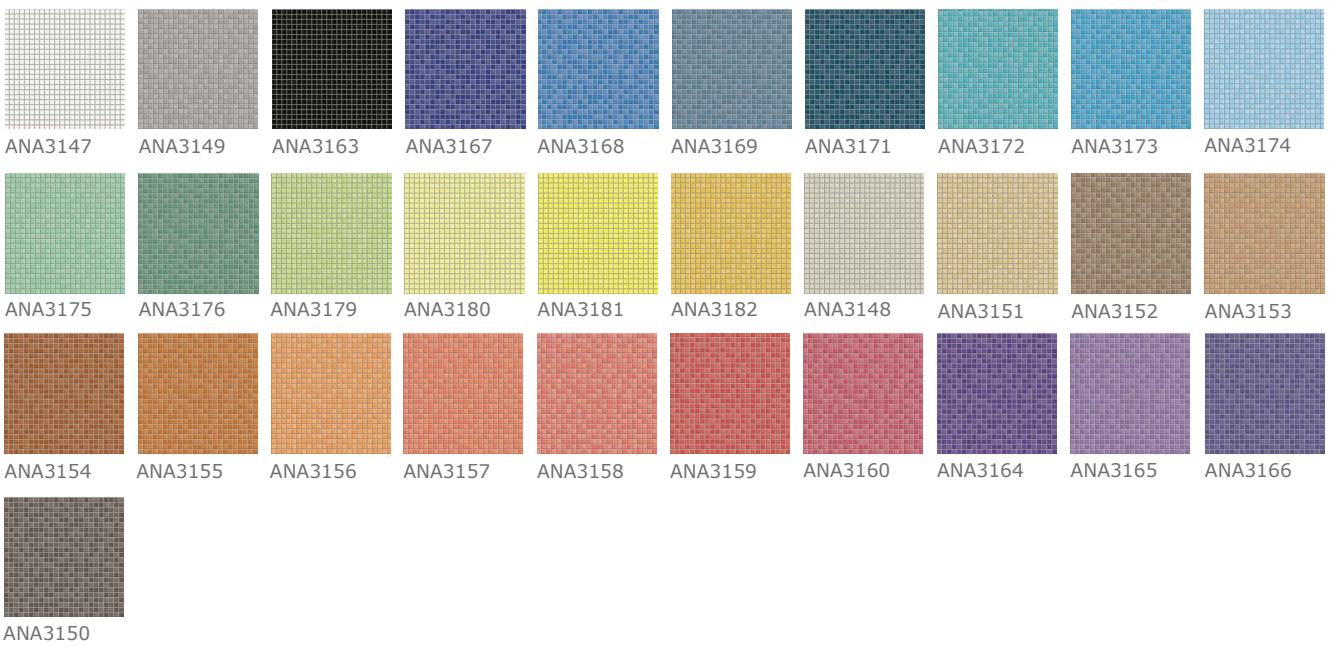

	SIZE	THICKNESS	FINISHES
1	12x12	7.2MM	NAT
2	25x25	7.2MM	NAT
3	50x100	7.2MM	NAT
4	100x100	7.2MM	NAT

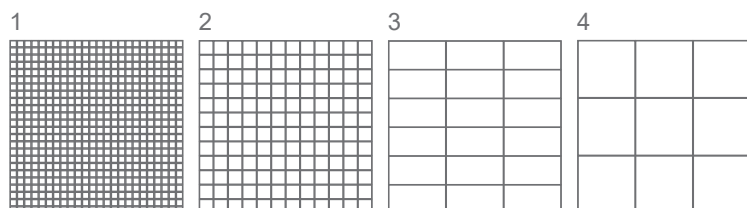

TECHNICAL SPECIFICATION

TECHNICAL CHARACTERISTIC	STANDARD	AVERAGE VALUES
Water absorption	ISO 10545-3	<2.5%
Sizes	ISO 10545-2	Conforms
Bending strength	ISO 10545-4	>39N/mm ²
Coefficient of linear thermal expansion	ISO 10545-8	Conforms
Frost resistance	ISO 10545-12	Conforms
Resistance to chemical products	ISO 10545-13	Conforms
Colour to light resistance	DIN 51094	Conforms

CLEANING + MAINTENANCE ADVICE

INITIAL WASHING

The initial washing is fundamental for good treatment results. The initial washing is aimed at removing any laying residues and building grime.

Equipment	Cloth
Procedure	<ul style="list-style-type: none"> • Clean off cement stains from grouting and other building work, which once hardened, will not be removed during any normal cleaning procedure. • Clean wall tiling with a dry cloth when joints are hard.

ROUTINE MAINTENANCE

The aim of the routine maintenance is to remove dirt and scuff marks. Must be carried out regularly.

Product	Filacleaner (Diluted 1:50 in warm water)
Equipment	Cloth
Procedure	<ul style="list-style-type: none"> • Remove dust with a dry cloth • Wash with FilaCleaner using a cloth that should be soaked often in the solution and wrung out well