

LIMA



- Expansive range of colours
- Suitable for wall + floor applications
- All colours available in all formats

22
COLOURS

3
FINISHES

12
TILE SIZE

www.grestec.co.uk | T: +44 (0) 345 130 2241 | E: sales@grestec.co.uk

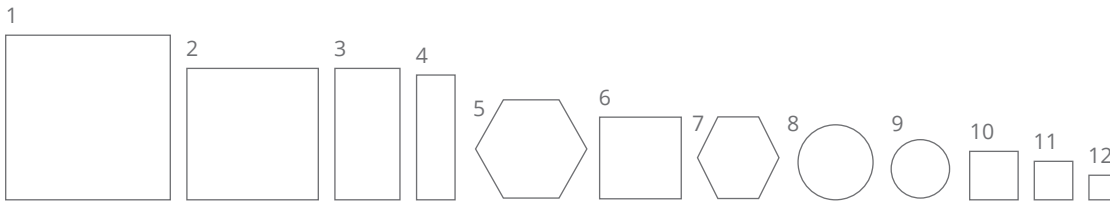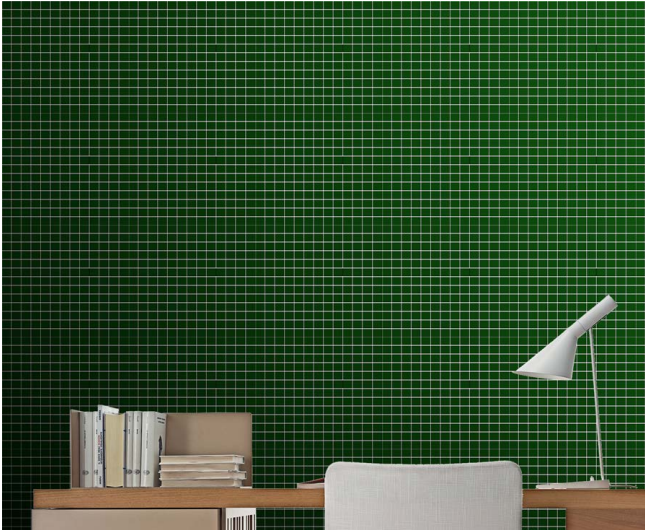

SIZES (mm)	> <	FINISHES			
1 50x50	6mm	MATT M (R11/B)	GLOSS G	ANTISLIP AS (R12)	
2 40x40	4mm	MATT M (R11/B)	GLOSS G	ANTISLIP AS (R12)	
3 20x40	4mm	MATT M (R11/B)	GLOSS G	ANTISLIP AS (R12)	
4 12x38	4mm	MATT M (R11/B)	GLOSS G		-
5 30x34 HEX	4mm	MATT M (R11/B)	GLOSS G	ANTISLIP AS (R12)	
6 25x25	4mm	MATT M (R11/B)	GLOSS G	ANTISLIP AS (R12)	
7 23x25 HEX	4mm	MATT M (R11/B)	GLOSS G	ANTISLIP AS (R12)	
8 23 DIA CIRCLE	4mm	MATT M (R11/B)	GLOSS G	ANTISLIP AS (R12)	
9 18 DIA CIRCLE	4mm	MATT M (R11/B)	GLOSS G		-
10 15x15	4mm	MATT M (R11/B)	GLOSS G	ANTISLIP AS (R12)	
11 12x12	4mm	MATT M (R11/B)	GLOSS G		-
12 8x8	4mm	MATT M (R11/B)	GLOSS G		-

SWATCH COLOURS MAY VARY, SAMPLES SHOULD BE REQUESTED. FIND US ON:    

TECHNICAL SPECIFICATION

TECHNICAL SPECIFICATION	STANDARD	AVERAGE VALUES
Water absorption	ISO 10545-3	None
Bending strength	ISO 10545-4	68.8N/mm
Scratch resistance	ISO 10545-7	PEI 5
Resistance to thermal shock	ISO 10545-9	No change
Frost resistance	ISO 10545-12	Resistance
Resistance to chemical products	ISO 10545-13	No change
Stain resistance	ISO 10545-14	Class 5

CLEANING + MAINTENANCE ADVICE - MATT + GLOSS (SEE NEXT PAGE FOR ANTI-SLIP)

INITIAL WASHING

The initial washing is fundamental for good treatment results. The initial washing is aimed at removing any laying residues and building grime.

Equipment	Cloth
Procedure	<ul style="list-style-type: none"> • Clean off cement stains from grouting and other building work, which once hardened, will not be removed during any normal cleaning procedure. • Clean wall tiling with a dry cloth when joints are hard.

ROUTINE MAINTENANCE

The aim of the routine maintenance is to remove dirt and scuff marks. Must be carried out regularly.

Product	Filacleaner (Diluted 1:50 in warm water)
Equipment	Cloth
Procedure	<ul style="list-style-type: none"> • Remove dust with a dry cloth • Wash with FilaCleaner using a cloth that should be soaked often in the solution and wrung out well

CLEANING + MAINTENANCE ADVICE - ANTISLIP

INITIAL WASHING

The initial washing is fundamental for good treatment results. The initial washing is aimed at removing any laying residues and building grime.

Product	Deterdek (1:5 diluted in water)
Coverage	Deterdek (5 l per 100m ²)
Equipment	Single-disc professional floor cleaner, liquid vacuum cleaner and cloth
Procedure	<ul style="list-style-type: none"> • After the floor is swept and soaked with water, spread the diluted Deterdek onto the floor. • Then scour with single-disc professional cleaner • Vacuum the residue, rinse the floor well and then mop with a liquid vacuum cleaner or a cloth.

ROUTINE MAINTENANCE

The aim of the routine maintenance is to remove dirt and scuff marks. Must be carried out regularly.

Product	Filacleaner (Diluted 1:50 in warm water)
Equipment	Cloth or mop (For large areas the use of a cleaning machine is recommended)
Procedure	<ul style="list-style-type: none"> • Dilute Filacleaner in warm water • Wipe a cloth wet with the solution over the floor • Rinse the floor in case of concentrated solutions of Filacleaner

SPECIAL MAINTENANCE

Special maintenance is carried out in case of very stubborn dirt, when the routine maintenance is not enough to restore the original look of the surface.

Product	Fila PS/87 (1:5 diluted in water)
Coverage	5 l per 100m ² (when diluted 1:5)
Procedure	<ul style="list-style-type: none"> • Dilute Fila PS/87 in 1:5 in water • Apply to the floor previously soaked with water and leave for a few minutes • Scrub with a single disc professional cleaner • Mop up residue with a liquid vacuum cleaner or cloth