

MULGRAVE

6
COLOURS

1
FINISHES

2
TILE SIZE

- Hexagon shapes
- Pattern tiles
- Wall tiles (can be used on floor in certain circumstances)
Please contact for advice.

www.grestec.co.uk | T: +44 (0)345 130 2241 | E: sales@grestec.co.uk



QTA39140
PEI 4

QTA39141
PEI 4

QTA39142*
PEI 3


QTA39143*
PEI 3



QTA39144*
PEI 3

QTA39145*
PEI 3

IF BEING USED ON FLOOR, PLEASE CONTACT FOR TECHNICAL ADVICE

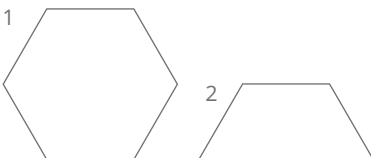

SIZES (mm)	> <	FINISHES	FINISHES						
			QTA39140	QTA39141	QTA39142	QTA39143	QTA39144	QTA39145	
1	230x266	9mm	MATT PTV L ●	■	■	■	■	■	■
2	115x266	9mm	MATT PTV L ●	■	■	■			

SWATCH COLOURS MAY VARY, SAMPLES SHOULD BE REQUESTED. FIND US ON:

TECHNICAL SPECIFICATION

TECHNICAL CHARACTERISTIC	STANDARD	AVERAGE VALUES
Water absorption	ISO 10545-3	Conforms
Sizes	ISO 10645-2	Conforms
Breaking of rupture	ISO 10545-4	Conforms
Modulus of rupture	ISO 10545-4	Conforms
Deep abrasion resistance	ISO 10545-6	Conforms
Thermal shock resistance	ISO 10545-9	Resistant
Crazing resistance	ISO 10545-11	Resistant
Frost resistance	ISO 10545-12	Resistant
Resistance to chemical products	ISO 10545-13	Conforms
Resistance to stains	ISO 10545-14	Class 5
Slip resistance		PTV L (low slip potential) *IF BEING USED ON FLOOR, PLEASE CONTACT FOR TECHNICAL ADVICE*

CLEANING + MAINTENANCE ADVICE

INITIAL WASHING

The initial washing is fundamental for good treatment results. The initial washing is aimed at removing any laying residues and building grime.

Product	Deterdek (1:5 diluted in water)
Coverage	Deterdek (5 l per 100m ²)
Equipment	Single-disc professional floor cleaner, liquid vacuum cleaner and cloth
Procedure	<ul style="list-style-type: none"> • After the floor is swept and soaked with water, spread the diluted Deterdek onto the floor. • Then scour with single-disc professional cleaner • Vacuum the residue, rinse the floor well and then mop with a liquid vacuum cleaner or a cloth.

ROUTINE MAINTENANCE

The aim of the routine maintenance is to remove dirt and scuff marks. Must be carried out regularly.

Product	Filacleaner (Diluted 1:50 in warm water)
Equipment	Cloth or mop (For large areas the use of a cleaning machine is recommended)
Procedure	<ul style="list-style-type: none"> • Dilute Filacleaner in warm water • Wipe a cloth wet with the solution over the floor • Rinse the floor in case of concentrated solutions of Filacleaner

SPECIAL MAINTENANCE

Special maintenance is carried out in case of very stubborn dirt, when the routine maintenance is not enough to restore the original look of the surface.

Product	Fila PS/87 (1:5 diluted in water)
Coverage	5 l per 100m ² (when diluted 1:5)
Procedure	<ul style="list-style-type: none"> • Dilute Fila PS/87 in 1:5 in water • Apply to the floor previously soaked with water and leave for a few minutes • Scrub with a single disc professional cleaner • Mop up residue with a liquid vacuum cleaner or cloth