

Terrac

- Terrazzo tiles
- Suitable for wall + floor applications



GRESTEC.CO.UK / 0345 130 2241



15MM THK




BLL5590



BLL5591



BLL5596



BLL5599



BLL5598


18MM THK



BLL5597



BLL5592

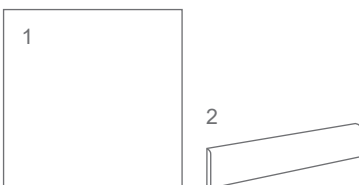

	SIZES (MM)	THICKNESS		FINISHES
1	400x400	15MM	18MM	HONED
2	70x400 SKIRTING	-	-	HONED

REQUEST SAMPLES, PRINT COLOURS MAY VARY. FIND US ON:



TECHNICAL SPECIFICATION

TECHNICAL CHARACTERISTIC	STANDARD	AVERAGE VALUES
Binder	25mm	1st Class Portland White Cement
Natural Stone Granule Size	ASTM-C136/84	100-8000
Specific gravity (gr/cm3)	UNI 10444	2.47
Flexural strength (N/mm2)	UNI 6133	9.5-10.2
Impact resistance (Joule)	UNI 10442	1.96
Resistance of Abrasion (mm3/50cm2)	UNI 10532	320
Surface Hardness (Mohs)	BS 6431	5-6
Water absorption (By weight %)	UNI 10444	1.4-3.9
Slip Resistance	ASTM-C 1028	0.78
Resistance to Fire	ISO/DIS 1182.2	Class 0
Resistance to Freezw/Thaw	DIN 52104	Resistant

CLEANING & MAINTENANCE

INITIAL WASHING

The initial washing is fundamental for good treatment results. The initial washing is aimed at removing any laying residues and building grime.

Product	Fila PS87 (Diluted)
Equipment	Single-disc professional cleaner, liquid vacuum cleaner and cloth
Procedure	<ul style="list-style-type: none"> • After the floor is swept and soaked with water, spread the diluted FilaClean onto the floor. • Then scour with single-disc professional cleaner • Vacuum the residue, rinse the floor well and then mop with a liquid vacuum cleaner or a cloth.

GROUT TEST

It is recommended to ensure that there is no staining from the grout selected, that a test area is carried out. If staining occurs then use the below procedure:

PROTECTION

Water repellent

Product	Filafob
---------	---------

PROTECTION DURING GROUTING PROCESS

Product	BAL Protective Sealer (Pure)
Coverage	25m2
Equipment	Cloth
Procedure	Apply prior to grouting Wash off after completion of grouting Allow floor to dry before protection

ROUTINE MAINTENANCE

The aim of the routine maintenance is to remove dirt and scuff marks. Must be carried out regularly.

Product	Filacleaner (Diluted in warm water)
Equipment	Cloth or mop (For large areas the use of a cleaning machine is recommended)
Procedure	<ul style="list-style-type: none"> • Dilute Filacleaner in warm water • Wipe a cloth wet with the solution over the floor • Rinse the floor in case of concentrated solutions of Filacleaner

SPECIAL MAINTENANCE

Special maintenance is carried out in case of very stubborn dirt, when the routine maintenance is not enough to restore the original look of the surface.

Product	Fila PS/87 (diluted)
Procedure	<ul style="list-style-type: none"> • Dilute Fila PS/87 in 1:5 in water • Apply to the floor previously soaked with water and leave for a few minutes • Scrub with a single disc professional cleaner • Mop up residue with a liquid vacuum cleaner or cloth