

# TESTA



- Colourful mosaics
- Suitable for swimming pool and bathroom walls
- Also suitable for pool floors where the water level exceeds 80cm only

22  
COLOURS

1  
FINISH

3  
TILE SIZES

[www.grestec.co.uk](http://www.grestec.co.uk) | T: 0345 130 2241 | E: [sales@grestec.co.uk](mailto:sales@grestec.co.uk)

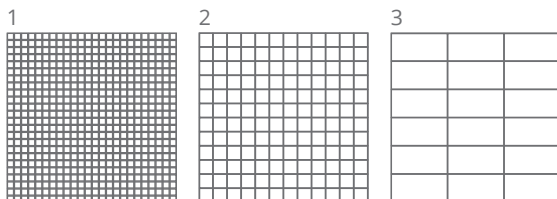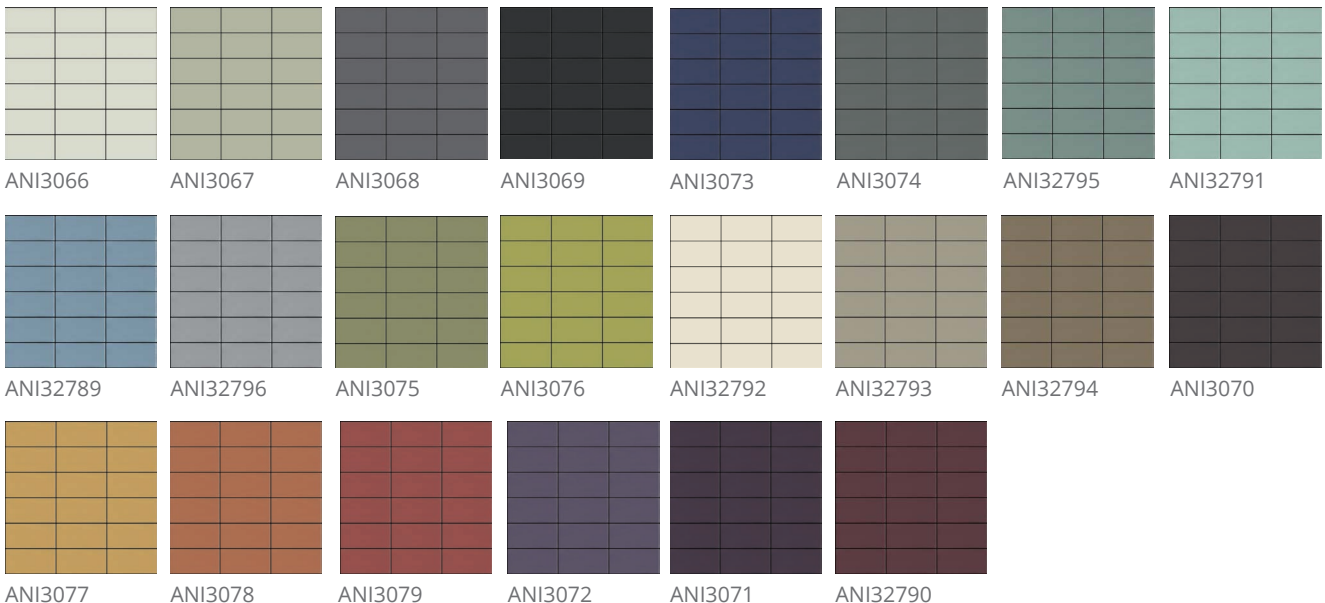

	SIZE (mm)	THICKNESS	FINISHES
1	12x12 mos on 300x300 mesh	7.2mm	GLAZED
2	25x25 mos on 300x300 mesh	7.2mm	GLAZED
3	50x100 mos on 300x300 mesh	7.2mm	GLAZED

SWATCH COLOURS MAY VARY, SAMPLES SHOULD BE REQUESTED. FIND US ON: [Instagram](#) [Pinterest](#) [Twitter](#) [LinkedIn](#)



## TECHNICAL SPECIFICATION

TECHNICAL CHARACTERISTIC	STANDARD	AVERAGE VALUES
Water absorption	ISO 10545-3	Conforms
Sizes	ISO 10545-2	Conforms
Flex resistance	ISO 10545-4	>30-50N/mm <sup>2</sup>
Deep abrasion resistance (PEI rating)	ISO 10545-7	2-4
Coefficient of linear thermal expansion	ISO 10545-8	< 7MK <sup>-1</sup>
Resistance to thermal shock	ISO 10545-9	Conforms
Frost resistance	ISO 10545-12	Conforms
Resistance to chemical products	ISO 10545-13	Conforms
Crazing resistance	ISO 10545-11	Conforms

## CLEANING + MAINTENANCE ADVICE

### INITIAL WASHING

The initial washing is fundamental for good treatment results. The initial washing is aimed at removing any laying residues and building grime.

Product	Filacleaner (Diluted 1:10 in warm water)
Equipment	Cloth
Procedure	<ul style="list-style-type: none"> <li>• Clean off cement stains from grouting and other building work, which once hardened, will not be removed during any normal cleaning procedure.</li> <li>• Clean off wall tiling with a dry cloth when joints are hard.</li> </ul>

### ROUTINE MAINTENANCE

The aim of the routine maintenance is to remove dirt and scuff marks. Must be carried out regularly.

Product	Filacleaner (Diluted 1:5 in warm water)
Equipment	Cloth
Procedure	<ul style="list-style-type: none"> <li>• Remove dust with a dry cloth</li> <li>• Dilute Filacleaner in warm water</li> <li>• Regularly soak cloth wet with the solution and wring out well before covering tiles.</li> </ul>