


TIERRA

10
COLOURS

1
FINISH

9
TILE SIZES


Neutral coloured ceramic tiles suitable for internal wall applications. Octagon, fishscale, arabesque and decorative embossed patterns.

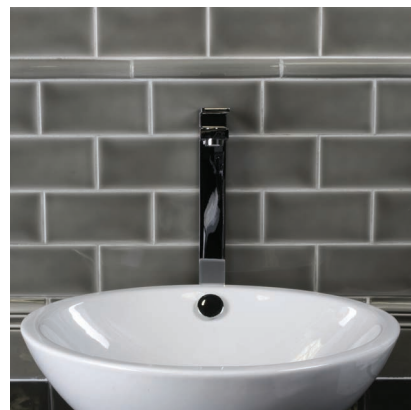

ADS32508 LRV: 90	ADS32512 LRV: 34	ADS32511 LRV: 9	ADS32524 LRV: 53	ADS32525 LRV: 45	ADS32509 LRV: 86
ADS32523 LRV: 56	ADS32510 LRV: 34	ADS32514 LRV: 20	ADS32513 LRV: 15		

*OCT ONLY AVAILABLE IN ADS32508 + ADS32509

	SIZES (mm)	> <	FINISHES
1	100x200	8.8mm	GLOSS
2	50x200	8.8mm	GLOSS
3	150x150	8.8mm	GLOSS
4	150x150 OCT*	8.8mm	GLOSS
5	75x150	8.8mm	GLOSS
6	75x150 FRAMED	8.8mm	GLOSS
7	75x75 FRAMED	8.8mm	GLOSS
8	150x150 T2	8.8mm	GLOSS
9	130x150 T1	8.8mm	GLOSS
10	GABLES 100x200	8.8mm	GLOSS
11	PALM 75x200	8.8mm	GLOSS
12	PONCIANA 30x200	8.8mm	GLOSS
13	CORNISA 75x200	8.8mm	GLOSS
14	BARRA 30x200	8.8mm	GLOSS
15	OCT-T1	8.8mm	GLOSS
16	OCT-T2	8.8mm	GLOSS
17	RODAPIE 150x150	8.8mm	GLOSS
18	CUBRECANTO 25x150	8.8mm	GLOSS
19	ANGLE CUBRECANTO	8.8mm	GLOSS

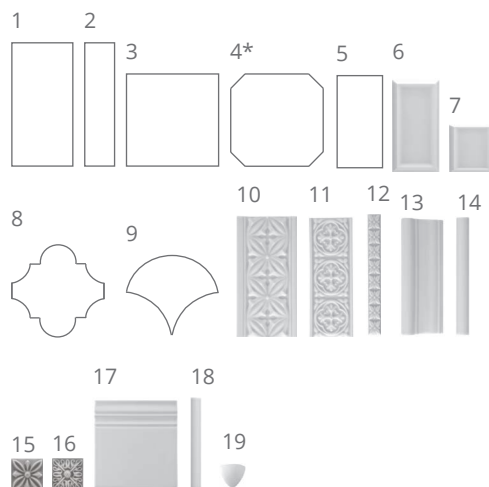

LRV and PTV values can vary batch to batch, please contact for advice.
Swatch colours may vary, samples should be requested.
Find us on:



TECHNICAL DATA SHEET - ISO 10545 AVERAGE VALUES

2	Sizes	Conforms	9	Resistance to thermal shock	Conforms
3	Water absorption	18-22%	13	Chemical resistance	GHB
4	Bending strength	Conforms	14	Stain resistance	Class 4
8	Coefficient of linear thermal expansion	Conforms			

SUSTAINABILITY INFORMATION



CLEANING + MAINTENANCE ADVICE

INITIAL WASHING

The initial washing is fundamental for good treatment results. The initial washing is aimed at removing any laying residues and building grime.

Product: Cloth

ROUTINE MAINTENANCE

The aim of the routine maintenance is to remove dirt and scuff marks. Must be carried out regularly.

Product: Cleaner Pro

Please see www.filasolutions.com for methods of use, dilution and coverage.