



TESSELLATE




Tessellate porcelain hexagon mosaics have a structural feel reminiscent of honeycomb. They are available in six shades featuring a mix of soft matt, gloss and fabric effect textures.




V2 moderate shade variation

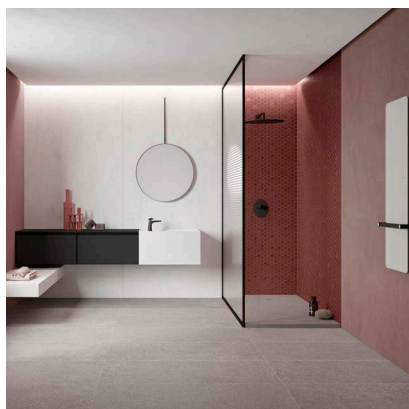


TNH34196
LRV: 77




TNH34198
LRV: 27




TNH34199
LRV: 9



TNH34197
LRV: 47




TNH43892
LRV: 16



TNH43893
LRV: 35

1



2



3



	SIZE (mm)	> <	FINISHES
1	38x43 HEX MOSAIC ON 316x316 MESH	4mm	MATT, GLOSS FABRIC MIX (R10/B) / PTV M ●
2	45x300 TRIM	6mm	MATT
3	50x300 SK	7.5mm	MATT

LRV and PTV values can vary batch to batch, please contact for advice.

Swatch colours may vary, samples should be requested.

Find us on:



www.grestec.co.uk | T: +44 (0)345 130 2241 | E: sales@grestec.co.uk



LONDON STUDIOS

Grestec has its own Tile Studios in London where architects and designers can visit to discover the latest tile ranges and concepts.

Full of new and existing collections suitable for all situations; commercial, retail and residential. Our studio spaces are an excellent environment for ideas, solutions and project discussions, with plentiful samples to take away immediately or simply order for next day delivery. Further details can be found on our website.

STUDIO 329 (APPOINTMENT ONLY)
Business Design Centre, 52 Upper Street,
Islington, London, N1 0QH

POP-UP STUDIO (UNMANNED/ WALK-INS)
The Building Centre, 26 Store Street,
London, WC1E 7BT



TECHNICAL DATA SHEET - ISO 10545 AVERAGE VALUES

3	Water absorption	Conforms	14	Stain resistance	Class 5
6	Deep abrasion resistance	Conforms		Slip resistance DIN 51130	R10
8	Thermal expansion coefficient	≤9 MK-1		Pendulum test	PTV M (Moderate slip potential)
9	Thermal shock resistance	Resistant			
12	Frost resistance	Resistant			
	Resistance to low concentrations	ULA to ULB			
13	Resistance to high concentrations	UHA to UHB			
	Resistance to domestic chemicals and additives for swimming pools	UA			

SUSTAINABILITY INFORMATION

The production system and management choices adopted allow us to keep consumption of natural resources and pollution down to a minimum. The manufacturing of the atomized paste (base) and powdered enamels (colour), is done by dry pressing without the use of water, creating a more durable quality product and avoiding the production of wastewater discharge. The firing is done using a modern electric kiln, powered by green energy produced from renewable sources (wind turbines and solar power) by one of the group's companies, avoiding the use of fossil fuels and atmospheric emissions. All scrap and waste are collected separately and sent for recycling. Made within EU.



CLEANING + MAINTENANCE ADVICE

INITIAL WASHING

The initial washing is fundamental for good treatment results. The initial washing is aimed at removing any laying residues and building grime.

Product: Deterdek Pro

ROUTINE MAINTENANCE

The aim of the routine maintenance is to remove dirt and scuff marks. Must be carried out regularly.

Product: Cleaner Pro

SPECIAL MAINTENANCE

Special maintenance is carried out in case of very stubborn dirt, when the routine maintenance is not enough to restore the original look of the surface.

Product: Fila PS/87

Please see www.filasolutions.com for methods of use, dilution and coverage.

