



NAVE COLOUR




Refined and soft hues inspired by natural elements. Nave Colour presents eight naturally desaturated colours, that create a true colour system that allows custom coordination of shades, as the warm and cold nuances complement each other perfectly. The textured and matt surface also comes to life in the light, with a soft glow that livens the material, making it unique and unconventional.



V1 monochromatic

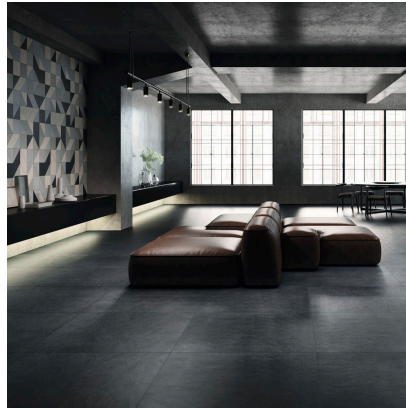


PGY33466
LRV: 71



PGY33467
LRV: 7



PGY33468
LRV: 34




PGY33469
LRV: 32



PGY33470
LRV: 53




PGY33471
LRV: 33



PGY33472
LRV: 10



PGY33473
LRV: 27

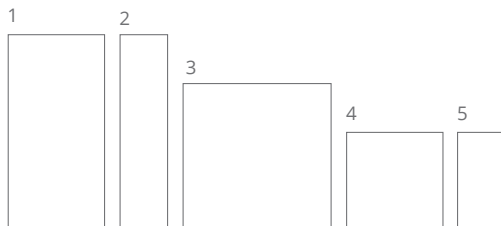

	SIZES (mm)	> <	FINISHES	PGY33466	PGY33467	PGY33468	PGY33469	PGY33470	PGY33471	PGY33472	PGY33473
1	600x1200	6mm	NAT (R9) / PTV M	●	■	■	■	■	■	■	■
2	300x1200	6mm	NAT (R9) / PTV M	●	■	■	■	■	■	■	■
3	1000x1000	6mm	NAT (R9) / PTV M	●	■	■	■	■	■	■	■
4	600x600	6mm	NAT (R9) / PTV M	●	■	■	■	■	■	■	■
5	300x600	6mm	NAT (R9) / PTV M	●	■	■	■	■	■	■	■

LRV and PTV values can vary batch to batch, please contact for advice.
Swatch colours may vary, samples should be requested.

Find us on:    



www.grestec.co.uk | T: +44 (0)345 130 2241 | E: sales@grestec.co.uk



LONDON STUDIOS

Grestec has its own Tile Studios in London where architects and designers can visit to discover the latest tile ranges and concepts.

Full of new and existing collections suitable for all situations; commercial, retail and residential. Our studio spaces are an excellent environment for ideas, solutions and project discussions, with plentiful samples to take away immediately or simply order for next day delivery. Further details can be found on our website.

STUDIO 329 (APPOINTMENT ONLY)
Business Design Centre, 52 Upper Street,
Islington, London, N1 0QH

POP-UP STUDIO (UNMANNED/ WALK-INS)
The Building Centre, 26 Store Street,
London, WC1E 7BT



TECHNICAL DATA SHEET - ISO 10545 AVERAGE VALUES

2	Sizes	± 0.2 % Length + width ± 5 % Thickness ± 0.2 % Straightness of edges ± 0.2 % Wedging ± 0.2 % Warpage	9	Resistance to thermal shock	Resistant
3	Water absorption	< 0,05%	12	Frost resistance	Frost-proof
4	Bending strength	> 42 N/mm ²	13	Chemical resistance	Unaffected
6	Resistance to deep abrasion	≤ 140 mm ³	14	Stain resistance	Class 5
8	Coefficient of linear thermal expansion	7 MK-1		PTV	PTV M (Moderate slip potential)
				Slip resistance DN 51130/ DN 51097	NAT (R9)

SUSTAINABILITY INFORMATION



CLEANING + MAINTENANCE ADVICE

INITIAL WASHING

The initial washing is fundamental for good treatment results. The initial washing is aimed at removing any laying residues and building grime.

Product: Deterdek

ROUTINE MAINTENANCE

The aim of the routine maintenance is to remove dirt and scuff marks. Must be carried out regularly.

Product: Cleaner Pro

SPECIAL MAINTENANCE

Special maintenance is carried out in case of very stubborn dirt, when the routine maintenance is not enough to restore the original look of the surface.

Product: Fila PS/87

Please see www.filasolutions.com for methods of use, dilution and coverage.

