

# SAFFRON

25  
COLOURS

2  
FINISHES


1  
TILE SIZE

- Suitable for internal wall applications
- QTT45624, QTTM45652, QTTM45655 + QTT45627 V1 shade variation ■
- All other colours - V3 high shade variation ■
- QTT45635 has a metallic glaze and crackle effect


www.grestec.co.uk | T: +44 (0) 345 130 2241 | E: sales@grestec.co.uk



## MATT

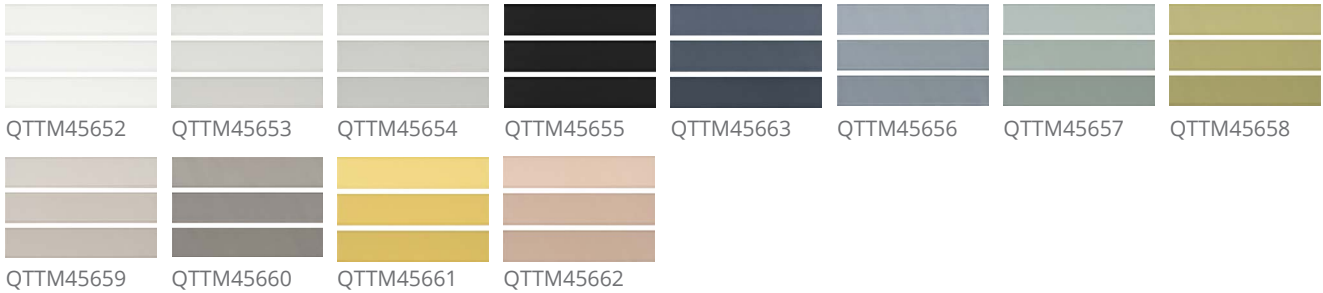

## GLOSS

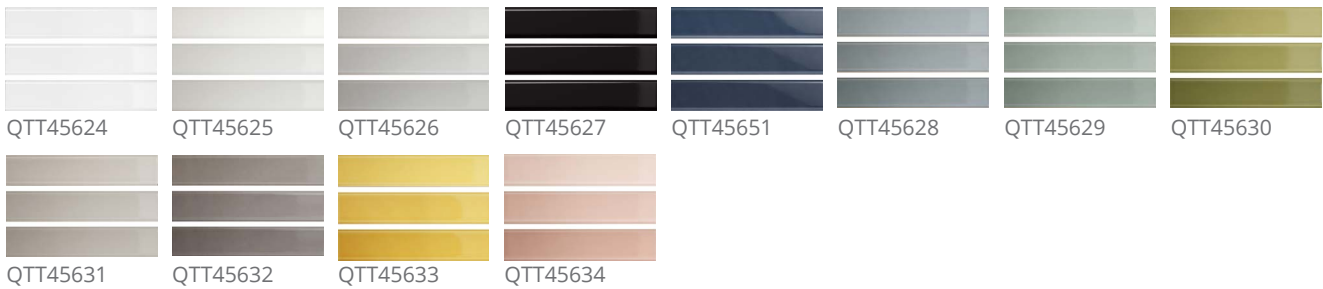

## METALLIC \*



QTT45635

SIZES (mm)	>  <	FINISHES	1
1 50x250	9mm	GLOSS	

SWATCH COLOURS MAY VARY, SAMPLES SHOULD BE REQUESTED. FIND US ON:    





## TECHNICAL SPECIFICATION

TECHNICAL SPECIFICATION	STANDARD	AVERAGE VALUES
Sizes	ISO 10545-2	Conforms
Water absorption	ISO 10545-3	Conforms
Breaking of rupture	ISO 10545-4	Conforms
Modulus of rupture	ISO 10545-4	Conforms
Scratch resistance	EN 101	Class 3
Resistance to thermal shock	ISO 10545-9	Resistant
Crazing resistance	ISO 10545-11	Resistant
Stain resistance	ISO 10545-14	Class 5

## CLEANING + MAINTENANCE ADVICE

### INITIAL WASHING

The initial washing is fundamental for good treatment results. The initial washing is aimed at removing any laying residues and building grime.

Product	Filacleaner (Diluted 1:10 in warm water)
Equipment	Cloth
Procedure	<ul style="list-style-type: none"> <li>• Clean off cement stains from grouting and other building work, which once hardened, will not be removed during any normal cleaning procedure.</li> <li>• Clean off wall tiling with a dry cloth when joints are hard.</li> </ul>

### ROUTINE MAINTENANCE

The aim of the routine maintenance is to remove dirt and scuff marks. Must be carried out regularly.

Product	Filacleaner (Diluted 1:5 in warm water)
Equipment	Cloth
Procedure	<ul style="list-style-type: none"> <li>• Remove dust with a dry cloth</li> <li>• Dilute Filacleaner in warm water</li> <li>• Regularly soak cloth wet with the solution and wring out well before covering tiles.</li> </ul>

### \* IMPORTANT INFORMATION - METALLIC TILES QTT45635

The special metallic glaze of these tiles is particularly acid-sensitive therefore we recommend before grouting to apply a sealer on the tiles (e.g. Fila MP90) and wait to 1 or 2 days for setting up the possible 'crackle effect'.

Anti-limescale products should not be used for ordinary maintenance. We recommend to use a natural cleaner such as Fila Cleaner.

**Do not use aggressive cleaning products such as bleach or ammonia.**

Complaints due to a laying or fixing mistakes will not be accepted.