

Material: **Porcelain** | Appearance: **Cement effect** | Application: **Walls and Floors**

# Aggrestone 2.0

Aggrestone features a blend of granite and limestone effects. Available in four cool and warm neutral concrete shades, suitable for both internal and external applications.



Shade variation: V3 high



PEAE53517



PEAE53518




PEAE53519




PEAE53520

**Decors- 600x1200, 200x1200 + 300x600mm**



PEAE53517DEC



PEAE53518DEC



PEAE53518DEC



PEAE53520DEC



Aggrestone PEA53519



LRV and PTV values can vary batch to batch, please contact for advice. PTV values refer to Slider 96 Shod - Wet (unless stated). Swatch colours may vary, samples should be requested.

[www.grestec.co.uk](http://www.grestec.co.uk) | T: 0345 130 2241 | E: [sales@grestec.co.uk](mailto:sales@grestec.co.uk)

Find us on:    




# Aggrestone 2.0



Aggrestone PEA53520

## Formats

	Size (mm)	Thickness	PTV Wet Slider 96	Colour Availability
1	600x1200	9.5	Natural $\geq 36$ PTV Brushed <b>25-35</b> PTV	All colours All colours
2	600x1200 DEC	9.5	Brushed <b>25-35</b> PTV	All colours
3	600x1200 THK	20	Thick	PEAE42318, 20
4	200x1200	9.5	Brushed <b>25-35</b> PTV	All colours
5	200x1200 DEC	9.5	Brushed <b>25-35</b> PTV	All colours
6	600x600	9.5	Brushed <b>25-35</b> PTV	All colours
7	300x600	9.5	Brushed <b>25-35</b> PTV	All colours
8	300x600 DEC	9.5	Brushed <b>25-35</b> PTV	All colours
9	65x600	9.5	Brushed <b>25-35</b> PTV	All colours
10	50x50 MOS on 300x300 MESH	9.5	Brushed <b>25-35</b> PTV	All colours
11	STT2 330x1200x32	9.5	Brushed <b>25-35</b> PTV	All colours
12	STT1 330x1200	9.5	Brushed <b>25-35</b> PTV	All colours
13	CORNER TILE 330x1200x32x32	9.5	Brushed <b>25-35</b> PTV	All colours
14	SK 46x1200	9.5	Brushed <b>25-35</b> PTV	All colours
15	SK 70x600	9.5	Brushed <b>25-35</b> PTV	All colours

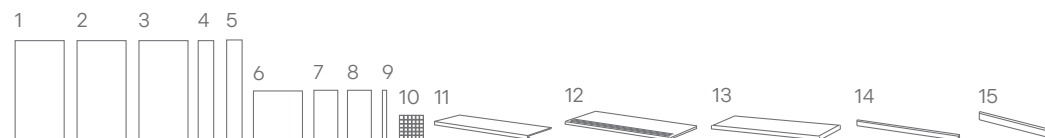

\* 600x1200 thick only available in ERE42325THK + ERE42327THK





## Aggrestone 2.0



Above  
Wall: PEAE53517 PEAE53517 DEC  
Floor: PEAE53517

Right  
Floor: PEAE53518



Above  
Wall: PEAE53519  
Floor: PEAE53519



# Aggrestone 2.0

## Technical data sheet - ISO 10545 average values

3	Water absorption	Conforms
4	Breaking strength	10mm: $\geq 2000$ N 20mm $\geq 12000$ N
4	Modulus of rupture	$>45$ N/mm <sup>2</sup>
12	Frost resistance	Conforms
13	Chemical resistance	A - LA - HA
14	Stain resistance	Class 5
	Slip resistance	BRU 25-35 PTV NAT $\geq 36$ PTV

## Sustainability information



## Cleaning and maintenance advice

### Initial washing

The initial washing is fundamental for good treatment results. The initial washing is aimed at removing any laying residues and building grime.

Product: Deterdek Pro

### Routine maintenance

The aim of the routine maintenance is to remove dirt and scuff marks. Must be carried out regularly.

Product: Cleaner Pro

### Special maintenance

Special maintenance is carried out in case of very stubborn dirt, when the routine maintenance is not enough to restore the original look of the surface.

Product: PS/87 Pro

Please see [www.filasolutions.com](http://www.filasolutions.com) for methods of use, dilution and coverage.