

# CASA DE HECTOR

- Encaustic style
- Suitable for external applications/ paving
- 20mm thick

**3**  
COLOURS

**1**  
FINISH

**1**  
TILE SIZE

www.grestec.co.uk | T: 0345 130 2241 | E: sales@grestec.co.uk



FRC46802




FRC46803




FRC46804

1



	SIZES (mm)	>  <	FINISHES
1	604x604	20mm	STR (R11)

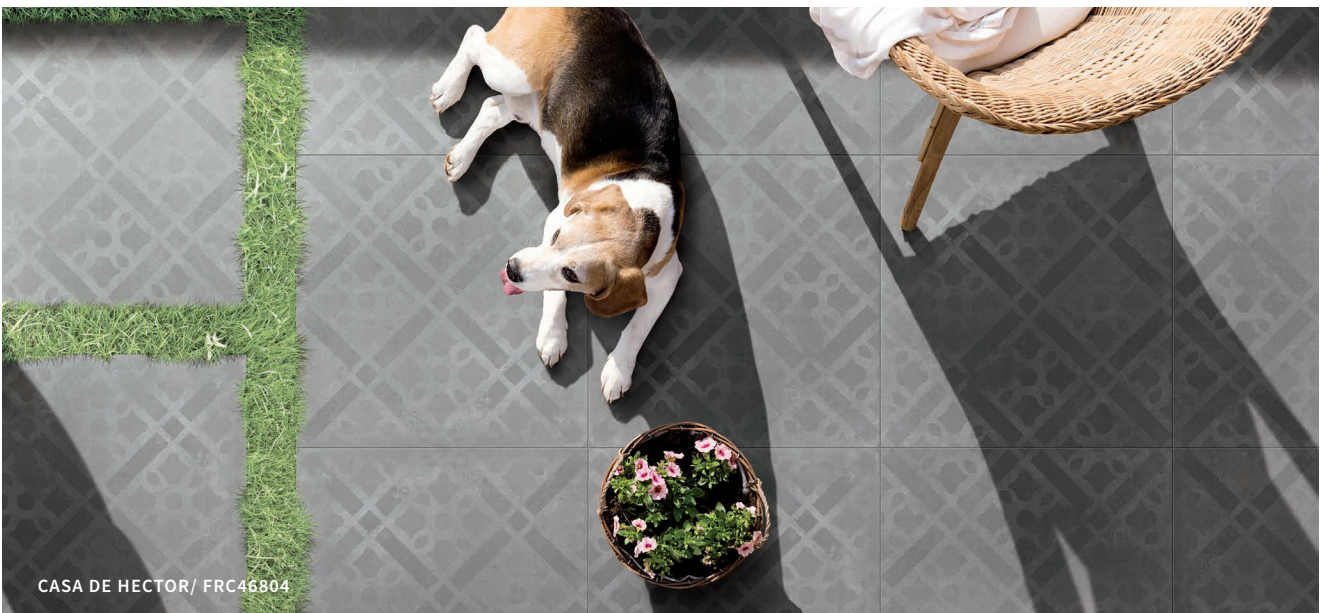

## TECHNICAL SPECIFICATION

TECHNICAL CHARACTERISTICS	STANDARD	AVERAGE VALUES
Sizes	ISO 10545-2	Conforms
Water absorption	ISO 10545-3	Conforms
Modulus of rupture	ISO 10545-4	Conforms
Breaking strength	ISO 10545-4	>10000 N
Linear thermal expansion coefficient	ISO 10545-8	$\alpha \leq 7 \times 10^{-6}/^{\circ}\text{C}$
Thermal shock resistance	ISO 10545-9	Conforms
Frost resistant	ISO 10545-12	Resistant
Resistance to chemical products	ISO 10545-13	Conforms
Resistance to staining	ISO 10545-14	Conforms
Slip resistance (Shod)	DIN 51130	R11

## CLEANING + MAINTENANCE ADVICE

### INITIAL WASHING

The initial washing is fundamental for good treatment results. The initial washing is aimed at removing any laying residues and building grime.

Product	Deterdek (1:5 diluted in water)
Coverage	Deterdek (5 l per 100m <sup>2</sup> )
Equipment	Single-disc professional floor cleaner, liquid vacuum cleaner and cloth
Procedure	<ul style="list-style-type: none"> <li>• After the floor is swept and soaked with water, spread the diluted Deterdek onto the floor.</li> <li>• Then scour with single-disc professional cleaner</li> <li>• Vacuum the residue, rinse the floor well and then mop with a liquid vacuum cleaner or a cloth.</li> </ul>

### ROUTINE MAINTENANCE

The aim of the routine maintenance is to remove dirt and scuff marks. Must be carried out regularly.

Product	Filacleaner (Diluted 1:50 in warm water)
Equipment	Cloth or mop (For large areas the use of a cleaning machine is recommended)
Procedure	<ul style="list-style-type: none"> <li>• Dilute Filacleaner in warm water</li> <li>• Wipe a cloth wet with the solution over the floor</li> <li>• Rinse the floor in case of concentrated solutions of Filacleaner</li> </ul>

### SPECIAL MAINTENANCE

Special maintenance is carried out in case of very stubborn dirt, when the routine maintenance is not enough to restore the original look of the surface.

Product	Fila PS/87 (1:5 diluted in water)
Coverage	5 l per 100m <sup>2</sup> (when diluted 1:5)
Procedure	<ul style="list-style-type: none"> <li>• Dilute Fila PS/87 in 1:5 in water</li> <li>• Apply to the floor previously soaked with water and leave for a few minutes</li> <li>• Scrub with a single disc professional cleaner</li> <li>• Mop up residue with a liquid vacuum cleaner or cloth</li> </ul>