

CEPPOTEC

- Stone effect
- Suitable for wall and floor applications
- V3 high shade variation

6

COLOURS


3

FINISHES

6

TILE SIZES


www.grestec.co.uk | T: +44 (0)345 130 2241 | E: sales@grestec.co.uk

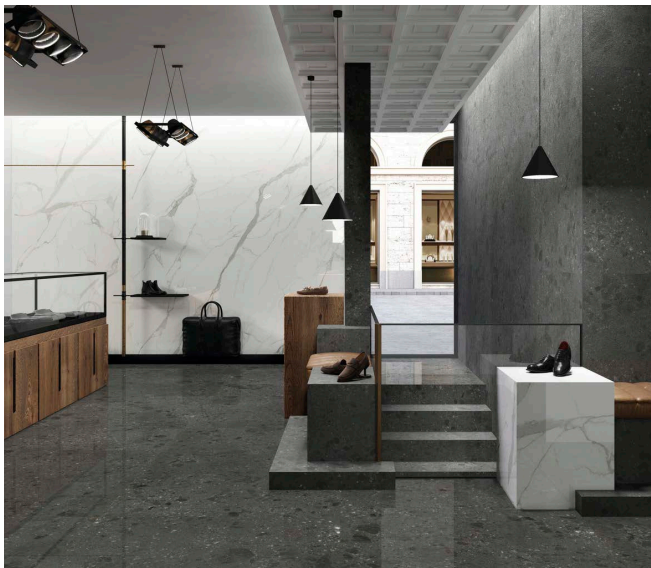


EA7490



EA7491




EA7492




EA7493



EA7494







EA7495

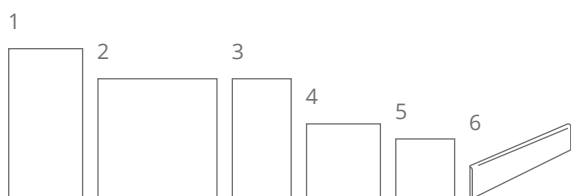

	SIZES (mm)	> <	FINISHES		
1	750x1500	10mm	NAT (R10)	POL	STR (R10/B)
2	1200x1200	10mm	NAT (R10)	POL	STR (R10/B)
3	600x1200	10mm	NAT (R10)	POL	STR (R10/B)
4	750x750	10mm	NAT (R10)	POL	STR (R10/B)
5	600x600	10mm	NAT (R10)	POL	STR (R10/B)
6	65x600 SK	10mm	NAT (R10)	POL	STR (R10/B)

SWATCH COLOURS MAY VARY, SAMPLES SHOULD BE REQUESTED. FIND US ON:    

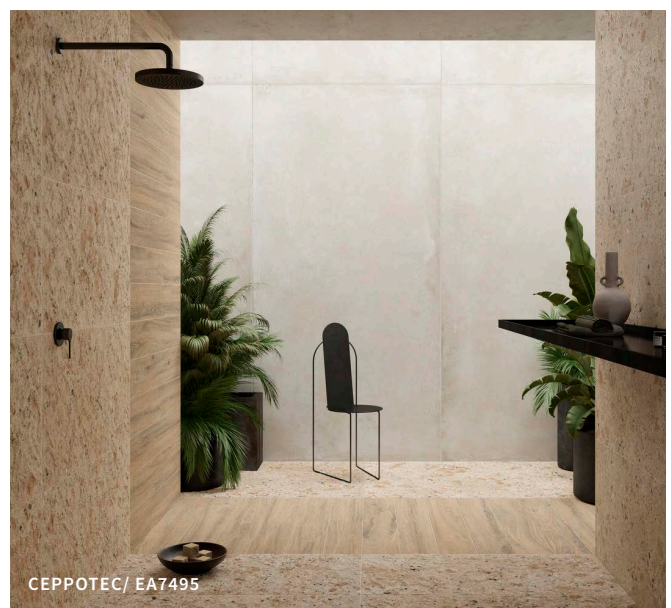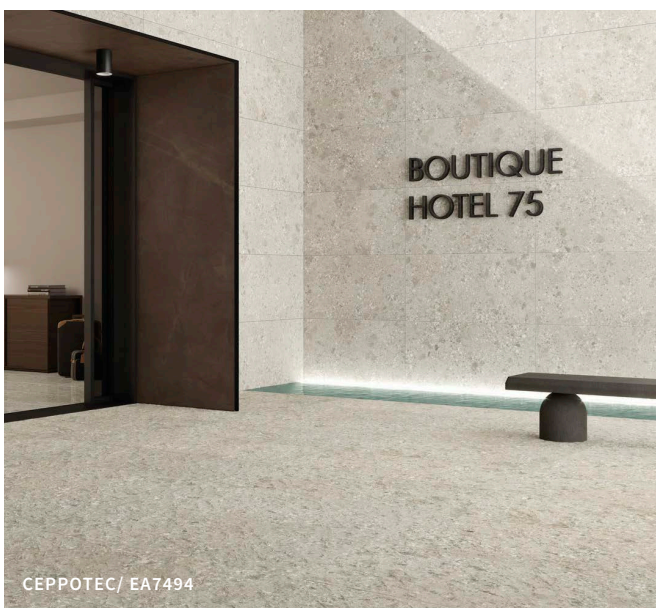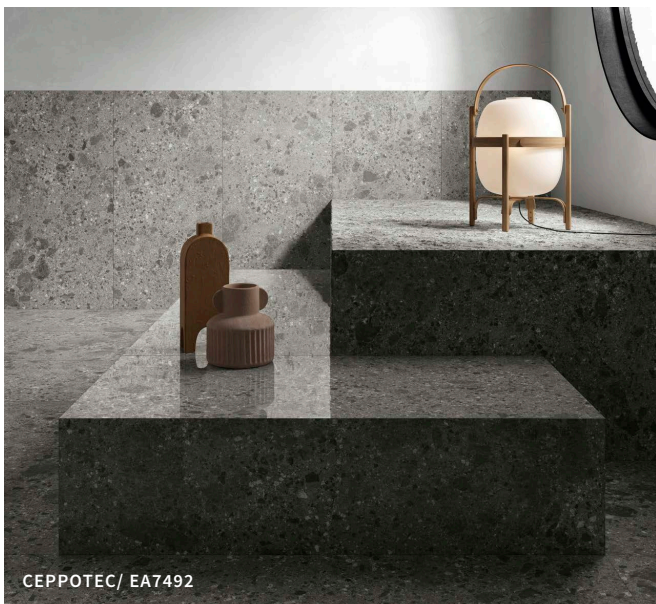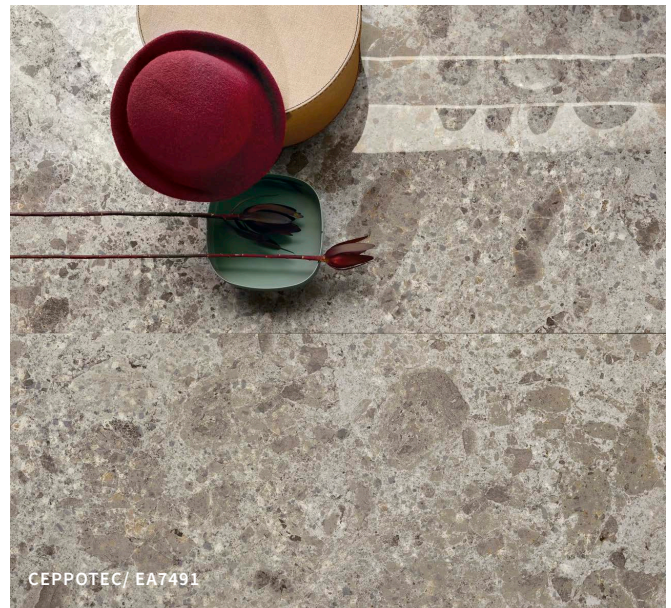

TECHNICAL SPECIFICATION

TECHNICAL CHARACTERISTIC	STANDARD	AVERAGE VALUES
Sizes	ISO 10545-2	Length and width $\pm 0,1\%$ Thickness $\pm 0,5\%$ Straightness of edges $\pm 0,1\%$ Wedging $\pm 0,1\%$ Flatness $< 0,2\%$
Water absorption	ISO 10545-3	$< 0,5\%$
Modulus of rupture	ISO 10545-4	49 N/mm ²
Deep abrasion resistance	ISO 10545-6	140 mm ³
Coefficient of linear thermal expansion	ISO 10545-8	$6,5 \times 10^{-6} \text{ }^{\circ}\text{C}^{-1}$
Resistance to sudden temperature changes	ISO 10545-9	Resistant
Frost resistance	ISO 10545-12	Conforms
Resistance to chemical products	ISO 10545-13	A
Slip resistance (Shod)	DIN 51130	NAT R10 STR R10
Slip resistance (Barefoot)	DIN 51097	NAT B STR B
Stain resistance	ISO 10545-14	Class 5

CLEANING + MAINTENANCE ADVICE

INITIAL WASHING

The initial washing is fundamental for good treatment results. The initial washing is aimed at removing any laying residues and building grime.

Product	Deterdek (1:5 diluted in water)
Coverage	Deterdek (5 l per 100m ²)
Equipment	Single-disc professional floor cleaner, liquid vacuum cleaner and cloth
Procedure	<ul style="list-style-type: none"> After the floor is swept and soaked with water, spread the diluted Deterdek onto the floor. Then scour with single-disc professional cleaner Vacuum the residue, rinse the floor well and then mop with a liquid vacuum cleaner or a cloth.

ROUTINE MAINTENANCE

The aim of the routine maintenance is to remove dirt and scuff marks. Must be carried out regularly.

Product	Filacleaner (Diluted 1:50 in warm water)
Equipment	Cloth or mop (For large areas the use of a cleaning machine is recommended)
Procedure	<ul style="list-style-type: none"> Dilute Filacleaner in warm water Wipe a cloth wet with the solution over the floor Rinse the floor in case of concentrated solutions of Filacleaner

SPECIAL MAINTENANCE

Special maintenance is carried out in case of very stubborn dirt, when the routine maintenance is not enough to restore the original look of the surface.

Product	Fila PS/87 (1:5 diluted in water)
Coverage	5 l per 100m ² (when diluted 1:5)
Procedure	<ul style="list-style-type: none"> Dilute Fila PS/87 in 1:5 in water Apply to the floor previously soaked with water and leave for a few minutes Scrub with a single disc professional cleaner Mop up residue with a liquid vacuum cleaner or cloth