

Material: **Porcelain** | Appearance: **Stone effect** | Application: **Walls and Floors**




# Gadara


The seamless blend of different marbles and stones with contrasting styles creates five unique mineral forms, showcasing the allure and unpredictable beauty of natural stone. Gadara's porcelain stoneware, with its technical and aesthetic excellence, offers innovative and distinctive design solutions perfect for any architectural project.




V3 high (AEAC42295 - AEAC42296)  
V4 extreme (AEAC42297 - AEAC42299)

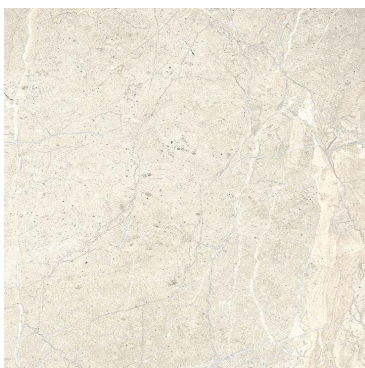


AEAC42295  
**LRV 55**

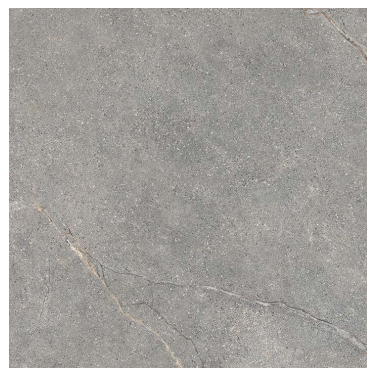

AEAC42296  
**LRV 28**

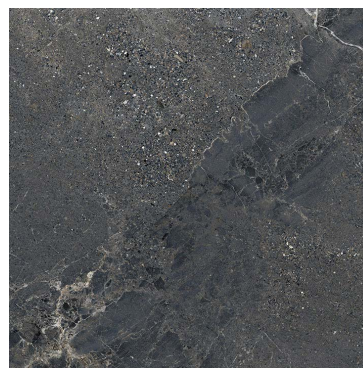

AEAC42297  
**LRV 13**

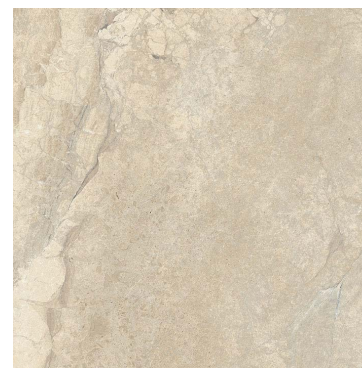

AEAC42298  
**LRV 47**







AEAC42299  
**LRV 31**



LRV and PTV values can vary batch to batch, please contact for advice. PTV values refer to Slider 96 (shod) – Wet (unless stated). Swatch colours may vary, samples should be requested.

[www.grestec.co.uk](http://www.grestec.co.uk) | T: 0345 130 2241 | E: [sales@grestec.co.uk](mailto:sales@grestec.co.uk)

Find us on:    



# Gadara


## Formats

			PTV Wet Slider 96
Sizes (mm)	Thickness		
1 1200x1200	9.5		Natural ≥36 PTV
2 600x1200	9.5		Natural ≥36 PTV Anti-slip ≥36 PTV Antique
3 600x1200	20		Thick ≥45 PTV
4 600x600	9.5		Natural ≥36 PTV Anti-slip ≥36 PTV Antique
5 300x600	9.5		Natural ≥36 PTV
6 145x498 CHEV	9.5		Natural ≥36 PTV
7 300x600 MOS-M	9.5		Natural ≥36 PTV
8 290x310 MOS-B	9.5		Antique
9 50x50 MOS on 300x300	9.5		Natural ≥36 PTV
10 350x1200 ST1	9.5		Natural ≥36 PTV Anti-slip ≥36 PTV Antique
11 350x1200 ST2	9.5		Natural ≥36 PTV Anti-slip ≥36 PTV Antique
12 75x600	9.5		Natural ≥36 PTV



## Pool pieces

			PTV Wet Slider 96
Item	Sizes (mm)	Thickness	
13 Pool Grille <b>(G)</b>	150x600	20	Thick ≥45 PTV
14 Grille Angle Left Corner <b>(GAS)</b>	150x600	20	Thick ≥45 PTV
15 Grille Angle Right Corner <b>(GAD)</b>	150x600	20	Thick ≥45 PTV
16 Pool Edge Standard Half-Bullnose <b>(CT)</b>	300x600	20	Thick ≥45 PTV
17 Pool Edge with Drip Groove <b>(CTC)</b>	300x600	20	Thick ≥45 PTV





# Gadara

## Technical data sheet - ISO 10545 average values

3	Water absorption	0,05%
4	Bending strength	2.200 N 9,5 mm
	Modulus of rupture	13.600 N 20mm
12	Frost resistance	Resistant
13	Chemical resistance	A - LA - HA
14	Stain resistance	Class 5
	Slip resistance	NAT R10 ANT R9 AS R11/C
	Pendulum test - Slider 96 (Shod)	NAT ≥36 PTV AS ≥36 PTV THK ≥45 PTV

## Sustainability information



## Cleaning and maintenance advice

### Initial washing

The initial washing is fundamental for good treatment results. The initial washing is aimed at removing any laying residues and building grime.

Product: Deterdek Pro

### Routine maintenance

The aim of the routine maintenance is to remove dirt and scuff marks. Must be carried out regularly.

Product: Cleaner Pro

### Special maintenance

Special maintenance is carried out in case of very stubborn dirt, when the routine maintenance is not enough to restore the original look of the surface.

Product: PS/87 Pro

Please see [www.filasolutions.com](http://www.filasolutions.com) for methods of use, dilution and coverage.