

Material: **Porcelain** | Appearance: **Stone effect** | Application: **Walls and Floors**


5 Colours
2 Finishes
13 Tile sizes

Madison

Madison is a porcelain stone collection boasting a gracefully natural texture, designed to cater to the demand for comfortable and contemporary environments. Crafted with cutting-edge technology, this collection showcases exceptional surface softness and superior slip resistance – a perfect blend that fulfils safety and maintenance requirements. Madison is also offered in a tactile, 3D bamboo finish, as well as a 20mm thick exterior format in selected colours.




Shade variation: V2 moderate



GRBA37731
GRBA37731THK*
LRV 58




GRBA37732
GRBA37732THK*
LRV 38



GRBA37733
GRBA37733THK*
LRV 14



GRBA37734
GRBA37734THK*



GRBA37735



GRBA37731BAM



GRBA37732BAM




GRBA37733BAM



GRBA37734BAM



GRBA37735BAM

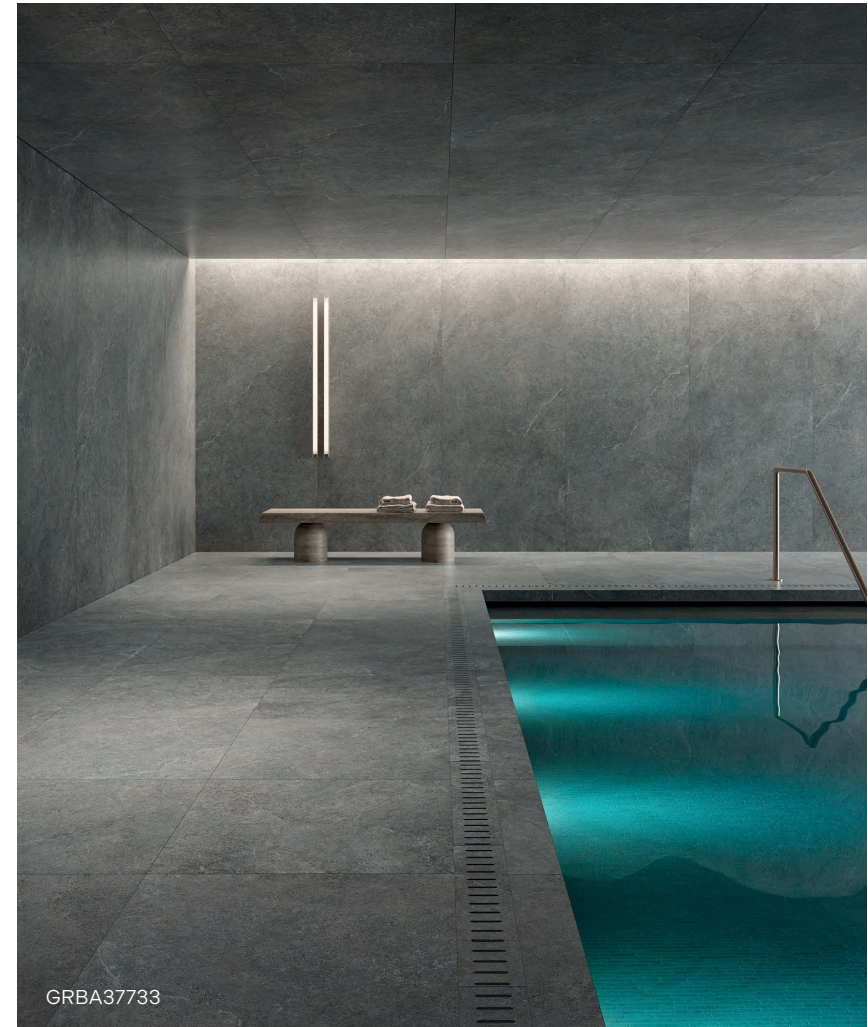

GRBA37733



LRV and PTV values can vary batch to batch, please contact for advice.
Switch colours may vary, samples should be requested.

www.grestec.co.uk | T: 0345 130 2241 | E: sales@grestec.co.uk

Find us on:




Madison



Formats

	Sizes (mm)	> <	Finishes			
1	1200x2800	6mm	NAT (R10)	-	-	-
2	800x1600	9mm	NAT (R10)	-	-	-
3	1200x1200	9mm	NAT (R10)	-	-	-
4	600x1200	9mm	NAT (R10)	BAM	-	-
5	600x1200 THK*	20mm	-	-	-	THK (R11/C)*
6	800x800	9mm	NAT (R10)	-	AS (R11/C)	-
7	800x800 THK*	20mm	-	-	-	THK (R11/C)*
8	400x800	9mm	NAT (R10)	-	-	-
9	600x600	9mm	NAT (R10)	-	-	-
10	300x600	9mm	NAT (R10)	-	-	-
11	STP MOS on 285x285 MESH	9mm	NAT (R10)	-	-	-
12	LEA MOS on 273x316 MESH	9mm	NAT (R10)	-	-	-
13	MOS5 50x50 MOS on 300x300 MESH	9mm	NAT (R10)	-	-	-
14	330x1200x40 ST	9mm	NAT (R10)	-	-	-
15	70x600 BULLNOSE SK	9mm	NAT (R10)	-	-	-

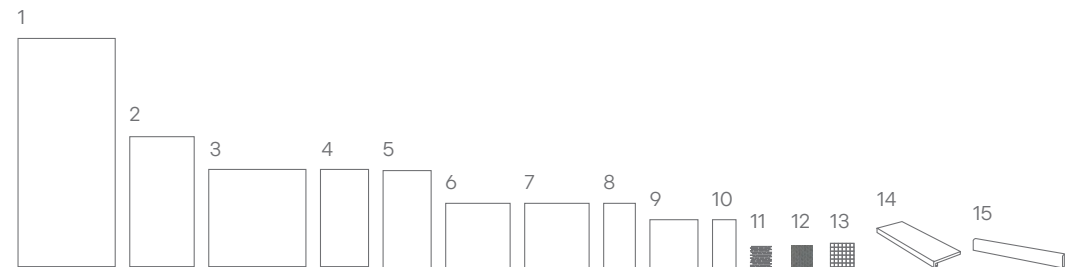



Madison



Above
GRBA37731 GRBA37732

Right
Wall: GRBA37732BAM



Above
Wall: GRBA37735BAM



Madison

Technical data sheet - ISO 10545 average values

2	Dimension and surface quality	Conforms
3	Water absorption	Conforms
4	Breaking strength	Conforms
4	Modulus of rupture	Conforms
6	Scratch resistance	< 150 mm ³
8	Coefficient of linear thermal expansion	6,8 MK-1
9	Thermal shock resistance	Resistant
13	Chemical resistance	Conforms
	Recycled content	GRBA37731: >16.8% GRBA37732: >22.1% GRBA37733: >25.9% GRBA37734: >16.8% GRBA37735: >22.1%
	Slip resistance	NAT R10 AS R11/C THK R11/C

Sustainability information



Cleaning and maintenance advice

Initial washing

The initial washing is fundamental for good treatment results. The initial washing is aimed at removing any laying residues and building grime.

Product: Deterdek Pro

Routine maintenance

The aim of the routine maintenance is to remove dirt and scuff marks. Must be carried out regularly.

Product: Cleaner Pro

Special maintenance

Special maintenance is carried out in case of very stubborn dirt, when the routine maintenance is not enough to restore the original look of the surface.

Product: PS/87 Pro

Please see www.filasolutions.com for methods of use, dilution and coverage.