

Material: Porcelain | Appearance: Clay | Application: Walls and Floors

4 Colours 3 Finishes 9 Tile size

Hars One

Hars-One features surfaces enriched with clay effects, available in natural R10, anti-slip R11/C and a decorative tactile option. Hars-One is a contemporary collection ideal for architectural use, suitable for internal/external walls/floors.



PEAD42386



PEAD42390
LRV: 53




PEAD42392



PEAD42393


Patterns 600x1200 + 300x600mm only



PEAD42386T1



PEAD42390T1



PEAD42392T1



PEAD42393T1



Hars One PEAD42393 - Hars Two PEA48717 PEA48709 PEA48712 PEA48720

LRV and PTV values may vary between batches; please contact us for guidance.
Swatch colours may differ from final production—samples are recommended.
www.grestec.co.uk | T: 0345 130 2241 | E: sales@grestec.co.uk
Find us on:






Hars One



Hars One PEAD42386 PEAD42387

Formats

Sizes (mm)		> <	Finishes	PEAD42386	PEAD42390	PEAD42392	PEAD42393	PEAD42386T1	PEAD42390T1	PEAD42392T1	PEAD42393T1
1	600×1200	9.5	Natural R10	■	■	■	■	■	■	■	■
2	800×800	9.5	Natural R10	■	■	■	■				
3	400×800	9.5	Natural R10	■	■	■	■				
4	600×600	9.5	Natural R10	■	■	■	■				
5	300×600	9.5	Natural R10	■	■	■	■	■	■	■	■
6	28×28 MOS on 300×300 MESH	9.5	Natural R10	■	■	■	■				
7	ST 330×1200	9.5	Natural R10	■	■	■	■				
8	STN 330×1200	9.5	Natural R10	■	■	■	■				
9	CORNR 330×1200×32×32	9.5	Natural R10	■	■	■	■				
10	CORNL 330×1200×32×32	9.5	Natural R10	■	■	■	■				
11	SK 46×800	9.5	Natural R10	■	■	■	■				
12	SK 70×600	9.5	Natural R10	■	■	■	■				

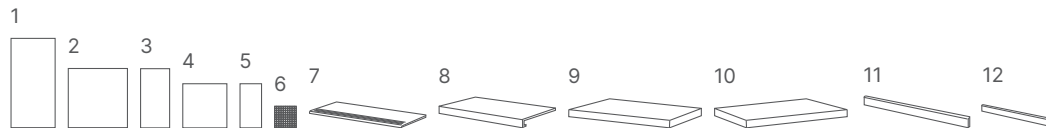

LRV and PTV values may vary between batches; please contact us for guidance.
 Swatch colours may differ from final production—samples are recommended.
www.grestec.co.uk | T: 0345 130 2241 | E: sales@grestec.co.uk

Find us on:

Material: Porcelain | Appearance: Clay | Application: Walls and Floors



Hars One







Above
Hars One PEAD42386 - Hars Two
PEAF48706 PEA48714

Right
Hars One PEAD42392 PEAD42392T1 -
Hars Two PEA48717



Above
Hars One PEAD42393T1

LRV and PTV values may vary between batches; please contact us for guidance.
Swatch colours may differ from final production—samples are recommended.
www.grestec.co.uk | T: 0345 130 2241 | E: sales@grestec.co.uk

Find us on:    



Hars One

Technical data sheet - ISO 10545 average values

3	Water absorption	Conforms
4	Modulus of rupture	≥ 45 N/mm²
4	Breaking strength	9.5mm: ≥ 2000 N 20mm: ≥ 12000 N
12	Frost resistance	Resistant
13	Chemical resistance	A - LA - HA
14	Stain resistance	Class 5
◆	Slip resistance	NAT R10 AS R11/C THK R11/C
◆	Recycled content	9.5mm THK- 12% 20mm THK- 20%

Sustainability information



Cleaning and maintenance advice

Initial washing
The initial washing is fundamental for good treatment results. The initial washing is aimed at removing any laying residues and building grime.
Product: Deterdek Pro

Routine maintenance
The aim of the routine maintenance is to remove dirt and scuff marks. Must be carried out regularly.
Product: Cleaner Pro

Special maintenance
Special maintenance is carried out in case of very stubborn dirt, when the routine maintenance is not enough to restore the original look of the surface.
Product: PS/87 Pro

Please see www.filasolutions.com for methods of use, dilution and coverage.

LRV and PTV values may vary between batches; please contact us for guidance.
Swatch colours may differ from final production—samples are recommended.
www.grestec.co.uk | T: 0345 130 2241 | E: sales@grestec.co.uk

Find us on: