


LAMORRAN TWO

3
COLOURS

4
FINISHES

14
TILE SIZES

Lammoran Two presents a combination of stone and concrete effects, in three colours, four surface finishes and a soft tumbled or hard tumbled, uneven edge. Lammoran Two offers a complete range, guided by a perfectly harmonious aesthetics, suitable for both wall and floor applications.

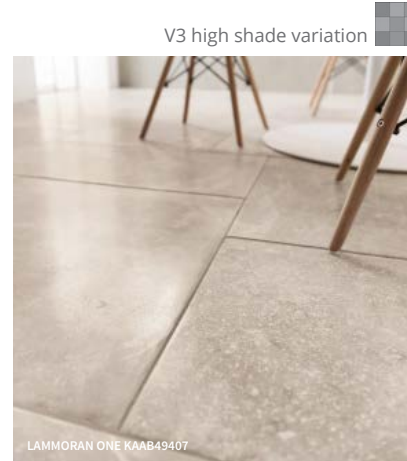

KAAF49425

KAAF49426

KAAF49427



	SIZES (mm)	> <	FINISHES			
1	800x800 STUM	10mm	NAT (R10)	LAP	-	-
2	800x800 STUM-THK	20mm	-	-	-	THK (R11/C)
3	800x800 HTUM	10mm	NAT (R10)	LAP	-	-
4	300x800/500x800 HTUM	10mm	-	LAP	-	-
5	400x800 STUM	10mm	NAT (R10)	LAP	-	-
6	600x600 STUM	10mm	NAT (R10)	LAP	AS (R11/C)	-
7	600x600 HTUMB	10mm	NAT (R10)	LAP	-	-
8	600x600 STUM-THK	20mm	-	-	-	THK (R11/C)
9	202x304 HTUM-THK	20mm	-	-	-	THK (R11/C)
10	150x600 MOSBRK HTUM	10mm	NAT (R10)	-	-	-
11	203x203 STUM	10mm	-	-	AS (R11/C)	-
12	202x202 HTUM-THK	20mm	-	-	-	THK (R11/C)
13	200x200 STUM	10mm	NAT (R10)	-	-	-
14	MODMIX 300x800, 500x800, 800x800, 600x600	10mm	NAT (R10)	LAP	-	-

LRV and PTV values can vary batch to batch, please contact for advice. Swatch colours may vary, samples should be requested.

Find us on:





LONDON STUDIOS

Grestec has its own Tile Studios in London where architects and designers can visit to discover the latest tile ranges and concepts.

Full of new and existing collections suitable for all situations; commercial, retail and residential. Our studio spaces are an excellent environment for ideas, solutions and project discussions, with plentiful samples to take away immediately or simply order for next day delivery. Further details can be found on our website.

STUDIO 329 (APPOINTMENT ONLY)
Business Design Centre, 52 Upper Street,
Islington, London, N1 0QH

POP-UP STUDIO (UNMANNED/ WALK-INS)
The Building Centre, 26 Store Street,
London, WC1E 7BT



TECHNICAL DATA SHEET - ISO 10545 AVERAGE VALUES

2	Sizes	Conforms	12	Frost resistance	Conforms
3	Water absorption	Conforms	13	Chemical resistance	A - LA - HA
4	Bending strength	53 N/mm ²	14	Stain resistance	Class 5
6	Resistance to deep abrasion	Conforms		Slip resistance	NAT R10 AS R11/C
8	Coefficient of linear thermal expansion	$\alpha=7 \times 10^{-6}/^{\circ}\text{C}-1$			
9	Thermal shock resistance	Conforms			

SUSTAINABILITY INFORMATION



CLEANING + MAINTENANCE ADVICE

INITIAL WASHING

The initial washing is fundamental for good treatment results. The initial washing is aimed at removing any laying residues and building grime.

Product: Deterdek

ROUTINE MAINTENANCE

The aim of the routine maintenance is to remove dirt and scuff marks. Must be carried out regularly.

Product: FilaCleaner

SPECIAL MAINTENANCE

Special maintenance is carried out in case of very stubborn dirt, when the routine maintenance is not enough to restore the original look of the surface.

Product: Fila PS/87

Please see www.filasolutions.com for methods of use, dilution and coverage.