


Material: **Porcelain** | Appearance: **Stone** | Application: **Walls and Floors**




Mullen


Mullen offers a fusion of style, performance, sophistication, and long-lasting quality. Its versatility is highlighted by the array of surface finishes and slip ratings offered, making it an ideal choice for diverse settings, whether in commercial or residential spaces, inside or out. Its design is understated, clean, and characterised by minimalism.



Shade variation: V3 - High




PERU42349




PERU42350



PERU42351




PERU42352



PERU42353



PERU42354



PERU42355



PERU42349T1



PERU42350T1



PERU42351T1



PERU42352T1



PERU42353T1



PERU42354T1







PERU42355T1



LRV and PTV values can vary batch to batch, please contact for advice.
Switch colours may vary, samples should be requested.

www.grestec.co.uk | T: 0345 130 2241 | E: sales@grestec.co.uk

Find us on:    



Mullen




Formats

	Sizes (mm)	> <	Finishes			
1	1200x1200*	9.5mm	NAT (R10)	-	-	-
2	600x1200	9.5mm	NAT (R10)	HAM (R11/C)	-	LAP
3	600x1200 T1	9.5mm	NAT (R10)	-	-	-
4	450x900	9.5mm	NAT (R10)	HAM (R11/C)	-	-
5	450x900*	20mm	-	-	THK (R11/C)	-
6	600x600	9.5mm	NAT (R10)	-	-	-
7	300x600	9.5mm	NAT (R10)	HAM (R11/C)	-	LAP
8	300x600 T1	9.5mm	NAT (R10)	-	-	-
9	50x50 MOS on 300x300 MESH	9.5mm	NAT (R10)	-	-	-
10	330x1200ST1	9.5mm	NAT (R10)	HAM (R11/C)	-	-
11	330x1200x32x32 ST2	9.5mm	NAT (R10)	-	-	-
12	330x1200x32x32 CORNL	9.5mm	NAT (R10)	-	-	-
13	330x1200x32x32 CORNR	9.5mm	NAT (R10)	-	-	-
14	46x900 SK1	9.5mm	NAT (R10)	-	-	-
15	70x600 SK2	9.5mm	NAT (R10)	-	-	-

* 1200x1200 is only available in PERU42349, PERU42351, PERU42352 and PERU42354

* 450x900 is only available in PERU42350, PERU42351, PERU42352 and PERU42353

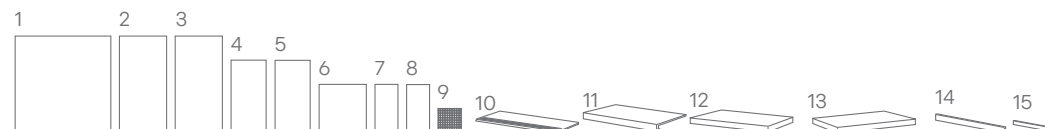



Mullen

Technical data sheet - ISO 10545 average values

2	Dimension and surface quality	Conforms
3	Water absorption	Conforms
4	Modulus of rupture	$\geq 45 \text{ N/mm}^2$
4	Breaking strength	$\geq 2000 \text{ N (9.5mm thick)}$ $\geq 12000 \text{ N (20mm thick)}$
12	Frost resistance	Conforms
13	Chemical resistance	A - LA - HA
14	Stain resistance	Class 5
	Slip resistance	NAT: R10 STR: R11/C

Sustainability information



Cleaning and maintenance advice

Initial washing

The initial washing is fundamental for good treatment results. The initial washing is aimed at removing any laying residues and building grime.

Product: Deterdek Pro

Routine maintenance

The aim of the routine maintenance is to remove dirt and scuff marks. Must be carried out regularly.

Product: Cleaner Pro

Special maintenance

Special maintenance is carried out in case of very stubborn dirt, when the routine maintenance is not enough to restore the original look of the surface.

Product: PS/87 Pro

Please see www.filasolutions.com for methods of use, dilution and coverage.