





MUSE




Muse is inspired by Moroccan hand-made tiles, featuring a handcrafted effect and a high shade variation. Available in 50x50 and 100x100 meshmounted mosaics in a gloss finish. The unique, tactile qualities of each tile in the Muse collection delivers elegance and personality to interior spaces.




V3 high shade variation

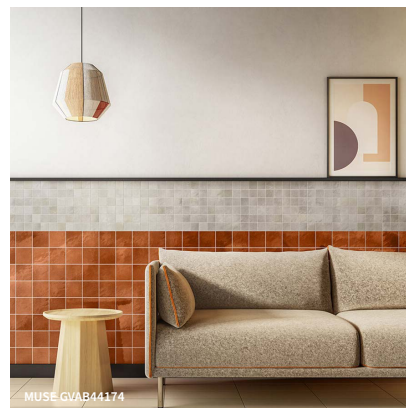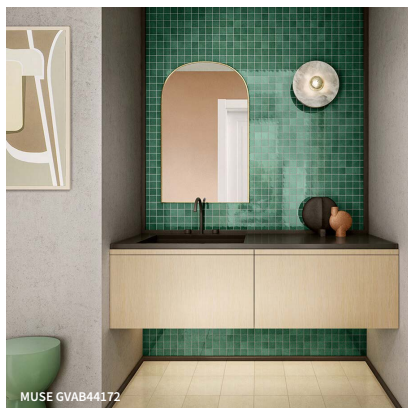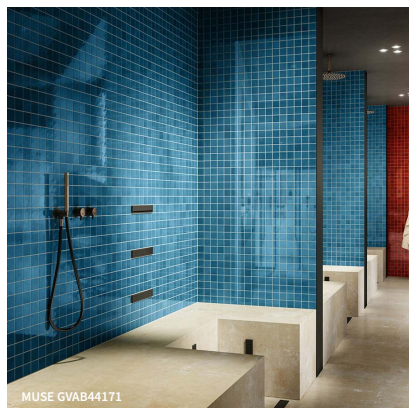


GVAB44168




GVAB44169




GVAB44170




GVAB44171




GVAB44172




GVAB44173



GVAB44174



GVAB44175

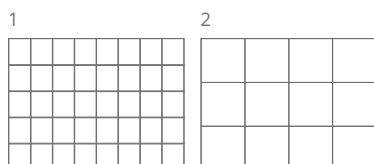



	SIZES (mm)	> <	FINISHES
1	50x50 MOS on MESH	7mm	GLOSS
2	100x100 MOS on MESH	7mm	GLOSS

LRV and PTV values can vary batch to batch, please contact for advice.
Swatch colours may vary, samples should be requested.

Find us on:



www.grestec.co.uk | T: +44 (0)345 130 2241 | E: sales@grestec.co.uk

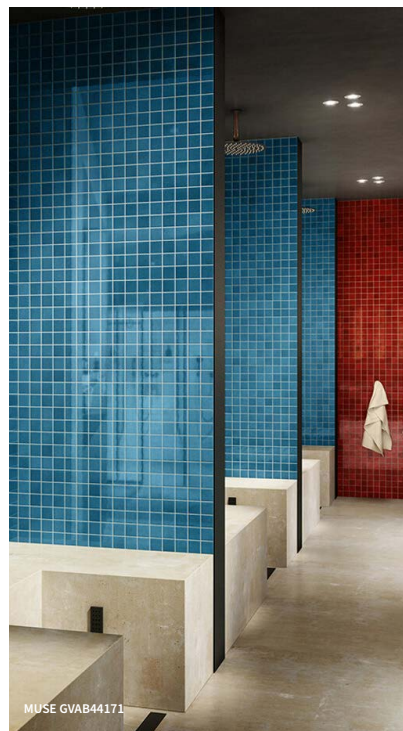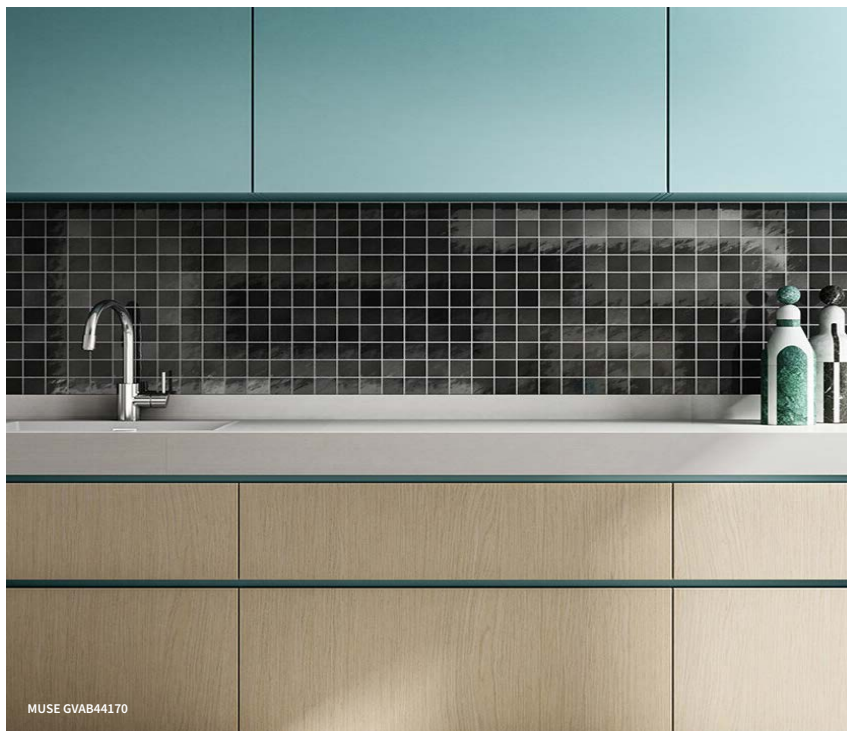

LONDON STUDIOS

Grestec has its own Tile Studios in London where architects and designers can visit to discover the latest tile ranges and concepts.

Full of new and existing collections suitable for all situations; commercial, retail and residential. Our studio spaces are an excellent environment for ideas, solutions and project discussions, with plentiful samples to take away immediately or simply order for next day delivery. Further details can be found on our website.

STUDIO 329 (APPOINTMENT ONLY)
Business Design Centre, 52 Upper Street,
Islington, London, N1 0QH

POP-UP STUDIO (UNMANNED/ WALK-INS)
The Building Centre, 26 Store Street,
London, WC1E 7BT



TECHNICAL DATA SHEET - ISO 10545 AVERAGE VALUES

2	Sizes	Sides $\pm 0,9$ mm	9	Thermal shock resistance	Conforms
		Thickness $\pm 0,5$ mm			
		Straightness of sides $\pm 0,5\%$			
		Squareness $\pm 0,5\%$			
		Flatness $\pm 0,5\%$			
3	Water absorption	Surface quality min. 95%	11	Crazing resistance	Conforms
4	Tensile strength	$0,5\% < E_b \leq 3,0\%$	12	Frost resistance	Conforms
4	Modulus of rupture	700 N min.	13	Chemical resistance	GB min.
4	Modulus of rupture	30N/mm ² min	14	Stain resistance	Class 3
8	Coefficient of linear thermal expansion	$< 6,9 \times 10^{-6}/^{\circ}\text{C}$			

SUSTAINABILITY INFORMATION



CLEANING + MAINTENANCE ADVICE

INITIAL WASHING

The initial washing is fundamental for good treatment results. The initial washing is aimed at removing any laying residues and building grime.

Product: Cloth

ROUTINE MAINTENANCE

The aim of the routine maintenance is to remove dirt and scuff marks. Must be carried out regularly.

Product: FilaCleaner

Please see www.filasolutions.com for methods of use, dilution and coverage.

