

Material: **Porcelain** | Appearance: **Stone** | Application: **Walls and floors**

4

Colours

3

Finishes

7


Tile sizes

Chateau Two

Chateau Two presents a subtle and refined interpretation of consistent natural stone slabs, available in four stone effect colours. An authentic realisation of a fossil rich natural stone with a faithful, natural variance within each tile, and available in both a 10 and external 20mm thick option.



Shade variation: V3 - High



KAAD49417
LRV 41



KAAD49418
LRV 6




KAAD49419
LRV 35



KAAD49420
LRV 23

***800x1800THK only available in KAAD94918**

	Sizes (mm)	> <	Finishes		
1	800x1800 THK*	20mm	-	-	THK (R11/C)
2	600x1200	10mm	NAT (R10) ≥36 PTV	AS (R11/C)	-
3	600x1200 THK	20mm	-	-	THK (R11/C)
4	800x800 THK	20mm	-	-	THK (R11/C)
5	400x800	10mm	NAT (R10) ≥36 PTV	AS (R11/C)	-
6	600x600	10mm	NAT (R10) ≥36 PTV	AS (R11/C)	-
7	600x600 THK	20mm	-	-	THK (R11/C)



LRV and PTV values can vary batch to batch, please contact for advice.
Switch colours may vary, samples should be requested.




KAAD49417, KAAC49413

Material: **Porcelain** | Appearance: **Stone** | Application: **Walls and floors**




Chateau Two

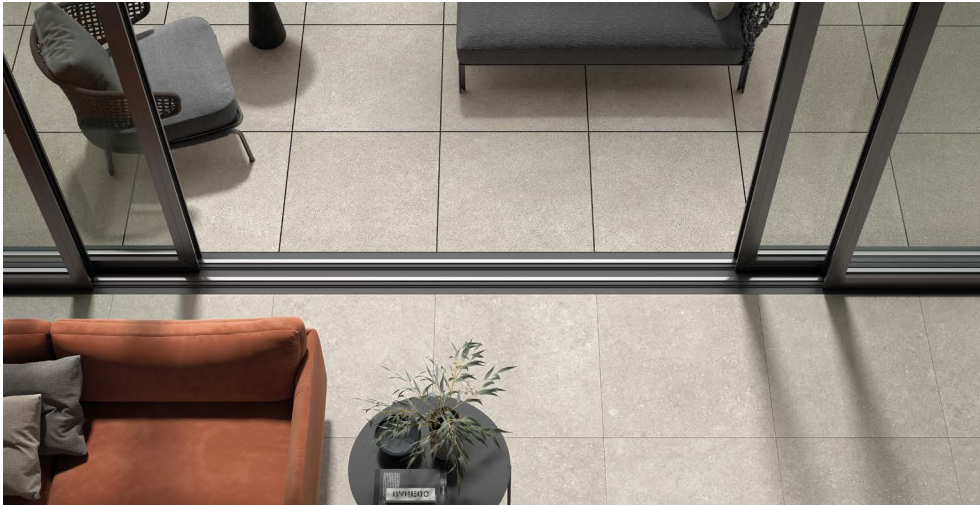

Above
Floor: KAAD49419 KAAD49419THK

Right
Floor: KAAD49418THK

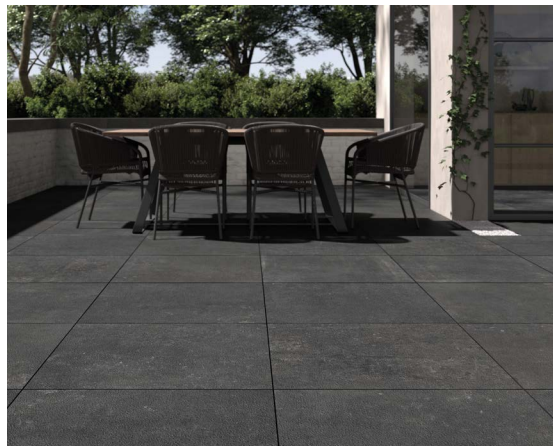

Above
Floor: KAAD49419

LRV and PTV values can vary batch to batch, please contact for advice.
Swatch colours may vary, samples should be requested.

www.grestec.co.uk | T: 0345 130 2241 | E: sales@grestec.co.uk

Find us on:    



Chateau Two

Technical data sheet - ISO 10545 average values

2	Sizes	Conforms
3	Water absorption	E<=0.04%
4	Bending strength	53 N/mm ²
6	Deep abrasion resistance	<128mm ³
8	Coefficient of linear thermal expansion	a=7x10-6/°C ⁻¹
9	Thermal shock resistance	No damage
12	Frost resistance	Resistant
13	Chemical resistance	UA - UBL - UHB
14	Stain resistance	Class 5
	Slip resistance	NAT R10 AS R11/C THK R11/C NAT: ≥36 PTV wet slider 96

Sustainability information



Cleaning and maintenance advice

Initial washing

The initial washing is fundamental for good treatment results. The initial washing is aimed at removing any laying residues and building grime.
Product: Deterdek Pro

Routine maintenance

The aim of the routine maintenance is to remove dirt and scuff marks. Must be carried out regularly.
Product: Cleaner Pro

Special maintenance

Special maintenance is carried out in case of very stubborn dirt, when the routine maintenance is not enough to restore the original look of the surface.
Product: PS/87 Pro

Please see www.filasolutions.com for methods of use, dilution and coverage.