

Material: **Porcelain** | Appearance: **Wood** | Application: **Walls and floors**



Lago

The Lago collection provides a range of timber-effect tiles that capture the authentic irregularities found in wood, while harnessing the high-performance attributes of porcelain stoneware. This results in a product that is both durable and versatile, showcasing innovation and a one-of-a-kind aesthetic.



Shade variation: V3 high



KAAM49446



KAAM49447



KAAM49453
15x100 MOS



KAAM49454
15x100 MOS



LRV and PTV values can vary batch to batch, please contact for advice.
Swatch colours may vary, samples should be requested.



www.grestec.co.uk | T: 0345 130 2241 | E: sales@grestec.co.uk

Find us on:    




Lago



Formats

	Sizes (mm)	> <		Finishes	
1	265x1800	10mm	NAT (R10)	AS (R11/C)	-
2	265x1800 THK	20mm	-	-	THK (R11/C)
4	200x1200	10mm	NAT (R10)	AS (R11/C)	-
5	200x1200 THK	20mm	-	-	THK (R11/C)
7	290x1200 MOS	10mm	NAT (R10)	-	-
8	250x1200 MOS	10mm	NAT (R10)	-	-
9	100x600 MOS	10mm	NAT (R10)	-	-
10	400x1200 THK	20mm	-	-	THK (R11/C)
12	30x30 MOS on 300x300 MESH	10mm	NAT (R10)	-	-
13	28x300 MOS on 300x300 MESH	10mm	NAT (R10)	-	-
14	15x100 MOS on 300x300 MESH *	10mm	NAT (R10)	-	-
15	75x600 SK	10mm	NAT (R10)	-	-

***15x100 MOS on 300x300 MESH only available in KAAM49453 KAAM49454**

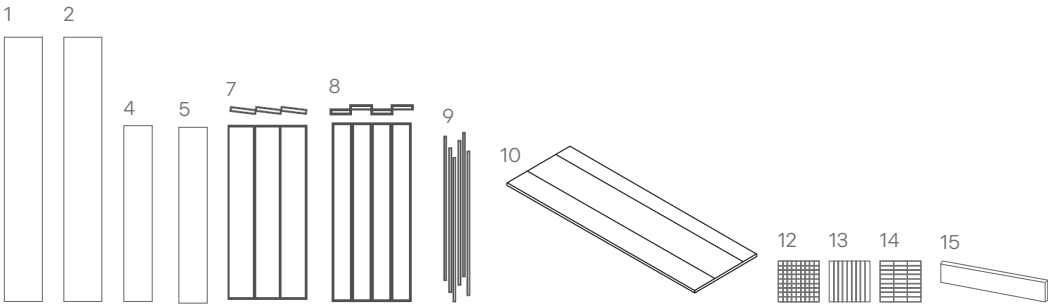

LRV and PTV values can vary batch to batch, please contact for advice.
Swatch colours may vary, samples should be requested.

Material: **Porcelain** | Appearance: **Wood** | Application: **Walls and floors**



Lago



LRV and PTV values can vary batch to batch, please contact for advice.
Swatch colours may vary, samples should be requested.

www.grestec.co.uk | T: 0345 130 2241 | E: sales@grestec.co.uk

Find us on:    



Lago

Technical data sheet - ISO 10545 average values

2	Sizes	Conforms
3	Water absorption	E <= 0,04 %
4	Bending strength	53 N/mm2
6	Resistance to deep abrasion	<128mm3
8	Coefficient of linear thermal expansion	a=7x10-6/°C-1
9	Thermal shock resistance	No damage
12	Frost resistance	No damage
13	Chemical resistance	UA ULA UHA
14	Stain resistance	Class 5
	Slip resistance	NAT R10 AS R11/C THK R11/C

Sustainability information



Cleaning and maintenance advice

Initial washing

The initial washing is fundamental for good treatment results. The initial washing is aimed at removing any laying residues and building grime.
Product: Deterdek Pro

Routine maintenance

The aim of the routine maintenance is to remove dirt and scuff marks. Must be carried out regularly.
Product: Cleaner Pro

Special maintenance

Special maintenance is carried out in case of very stubborn dirt, when the routine maintenance is not enough to restore the original look of the surface.
Product: PS/87 Pro

Please see www.filasolutions.com for methods of use, dilution and coverage.