

# SPECTRALITY

18  
COLOURS


2  
FINISHES

11  
TILE SIZES

A colour palette of 18 plain and speckled shades focused on functionality, trends, and performance. Spectrality is suitable for internal wall and floor applications, and external walls.




## SPECTRALITY

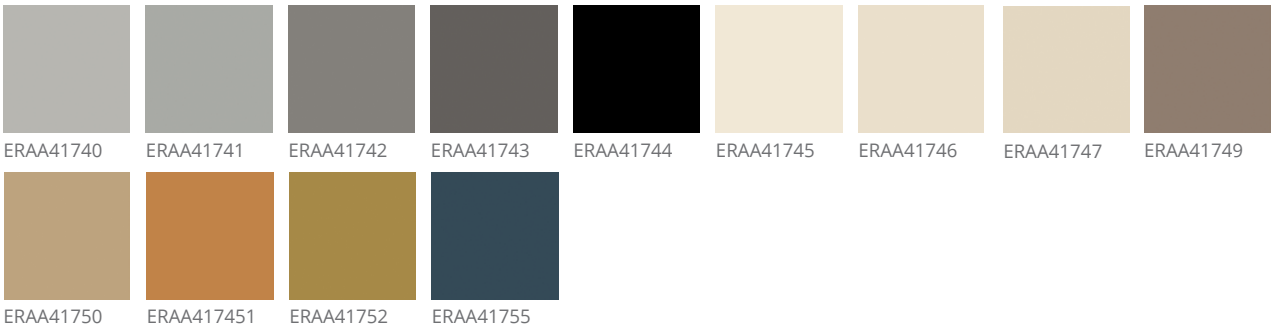

## SPECTRALITY GRAIN



	SIZES (mm)	>  <	FINISHES	ERA41740	ERA41741	ERA41742	ERA41743	ERA41744	ERA41745	ERA41746	ERA41747	ERA41749	ERA41750	ERA41751	ERA41752	ERA41755	ERA41782	ERA41783	ERA41784	ERA41785	ERA41786
1	597x1190	10.5mm	NAT (R10) -																		
2	890x890	10.5mm	NAT (R10) -																		
3	597x597	10.5mm	NAT (R10) -																		
4	597x597	9.8mm	- POL																		
5	297x597	10.5mm	NAT (R10) -																		
6	297x597	9.2mm	NAT (R10) -																		
7	297x597	8.5mm	- POL																		
8	297x297	8.3mm	NAT (R10) -																		
9	297x297	7.6mm	- POL																		
10	147x147	8.3mm	NAT (R10) -																		
11	97x97	8.3mm	NAT (R10) -																		

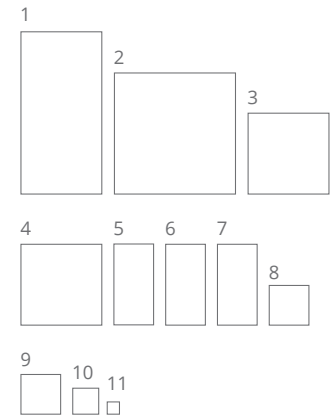

LRV and PTV values can vary batch to batch, please contact for advice.  
Swatch colours may vary, samples should be requested.  
Find us on:





SPECTRALITY ERAA41745 SPECTRALITY GRAIN ERAB41781



SPECTRALITY ERAA41744 ERAA41745



SPECTRALITY GRAIN ERAB41784



SPECTRALITY ERAA41742 ERAA41752



SPECTRALITY ERAA41744 ERAA41750



SPECTRALITY ERAA41745 ERAA41751

## LONDON STUDIOS

Grestec has its own Tile Studios in London where architects and designers can visit to discover the latest tile ranges and concepts.

Full of new and existing collections suitable for all situations; commercial, retail and residential. Our studio spaces are an excellent environment for ideas, solutions and project discussions, with plentiful samples to take away immediately or simply order for next day delivery. Further details can be found on our website.

**STUDIO 329 (APPOINTMENT ONLY)**  
Business Design Centre, 52 Upper Street,  
Islington, London, N1 0QH

**POP-UP STUDIO (UNMANNED/ WALK-INS)**  
The Building Centre, 26 Store Street,  
London, WC1E 7BT



## TECHNICAL DATA SHEET - ISO 10545 AVERAGE VALUES

2	Sizes	Length & width $\pm 0,3\%$ Squareness $\pm 0,3\%$ Straighness of edges $\pm 0,3\%$ Flatness $\pm 0,3\%$ Thickness $\pm 3\%$	11	Hair cracking resistance	Conforms
3	Water absorption	$1 < Ev 2,5\%$	12	Frost resistance	Resistant
4	Breaking strength	$\geq 40N/mm^2$	13	Chemical resistance	Resistant
8	Linear thermal dilatation	$\leq 7.00E-06 / 0C$	13	Stain resistance	Conforms
9	Thermal shock resistance	Resistant		Slip resistance DIN 51130/ DIN 51097	NAT R10

## SUSTAINABILITY INFORMATION



## CLEANING + MAINTENANCE ADVICE

### INITIAL WASHING

The initial washing is fundamental for good treatment results. The initial washing is aimed at removing any laying residues and building grime.

**Product: Deterdek Pro**

### ROUTINE MAINTENANCE

The aim of the routine maintenance is to remove dirt and scuff marks. Must be carried out regularly.

**Product: CleanerPo**

### SPECIAL MAINTENANCE

Special maintenance is carried out in case of very stubborn dirt, when the routine maintenance is not enough to restore the original look of the surface.

**Product: PS/87 Pro**

*Please see [www.filasolutions.com](http://www.filasolutions.com) for methods of use, dilution and coverage.*