

Material: **Porcelain** | Appearance: **Cement effect** | Application: **Walls and Floors**

10
Colours

2
Finishes


8
Tile sizes

Kelemi

Inspired by hand-trowelled cement resin, Kelemi presents an ultra-realistic collection of nine dense cement-effect colours. Kelemi strikes a perfect balance between minimalism and a love of decoration, between three-dimensional textures and wallpaper effect decors.



Shade variation: V2 moderate



| | | | | |
|----------------------|----------------------|----------------------|----------------------|----------------------|
| PEBF48774 LRV: 66 | PEBF48775 LRV: 36 | PEBF48776 LRV: 25 | PEBF48777 LRV: 10 | PEBF48778 LRV: 29 |
|----------------------|----------------------|----------------------|----------------------|----------------------|



| | | | |
|----------------------|----------------------|----------------------|----------------------|
| PEBF48779 LRV: 22 | PEBF48780 LRV: 58 | PEBF48781 LRV: 32 | PEBF48782 LRV: 20 |
|----------------------|----------------------|----------------------|----------------------|

Decor



| | | | | |
|-------------|-------------|-------------|-------------|-------------|
| PEBF48774T1 | PEBF48775T1 | PEBF48776T1 | PEBF48777T1 | PEBF48778T1 |
|-------------|-------------|-------------|-------------|-------------|



| | | | | |
|-------------|-------------|-------------|-------------|-----------|
| PEBF48779T1 | PEBF48780T1 | PEBF48781T1 | PEBF48782T1 | PEBF48783 |
|-------------|-------------|-------------|-------------|-----------|



Kelemi PEBF48777



LRV and PTV values can vary batch to batch, please contact for advice. PTV values refer to Slider 96 (shod) – Wet (unless stated). Swatch colours may vary, samples should be requested.

www.grestec.co.uk | T: 0345 130 2241 | E: sales@grestec.co.uk

Find us on:



Kelemi




Kelemi PEBF48781T1

Formats

| | Sizes (mm) | > < | Finishes | |
|----|---------------------------|-------|-------------------|--------------|
| 1 | 1200x1200 | 9.5mm | NAT (R10) PTV ≥36 | - |
| 2 | 600x1200 | 9.5mm | NAT (R10) PTV ≥36 | AS (R11/B)** |
| 3 | 600x1200 T1 | 9.5mm | NAT (R10) PTV ≥36 | - |
| 4 | 600x1200 DECOR | 9.5mm | NAT (R10) PTV ≥36 | - |
| 5 | 600x600 | 9.5mm | NAT (R10) PTV ≥36 | - |
| 6 | 300x600 | 9.5mm | NAT (R10) PTV ≥36 | - |
| 7 | 300x600 T1* | 9.5mm | NAT (R10) PTV ≥36 | - |
| 8 | 48x48 MOS on 300x300 MESH | 9.5mm | NAT (R10) PTV ≥36 | - |
| 9 | 330x1200 ST1 | 9.5mm | NAT (R10) PTV ≥36 | - |
| 10 | 330x1200x32x32 ST2 | 9.5mm | NAT (R10) PTV ≥36 | - |
| 11 | 330x1200x32x32 CORNER | 9.5mm | NAT (R10) PTV ≥36 | - |
| 12 | 46x1200 SK | 9.5mm | NAT (R10) PTV ≥36 | - |
| 13 | 70x600 SK | 9.5mm | NAT (R10) PTV ≥36 | - |

*300x600 T1 is only available in PEBF48774, PEBF48775, PEBF48776, PEBF48777, PEBF48780 and PEBF48781

**Anti-slip R11/B is not available in PEBF48779 and PEBF48778

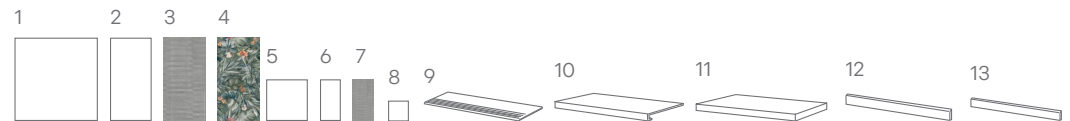

PTV≥36 wet with slider 96




Kelemi



Above
Wall: PEBF48778 PEBF48783
Floor: PEBF48774

Right
Floor: Kelemi PEBF48779

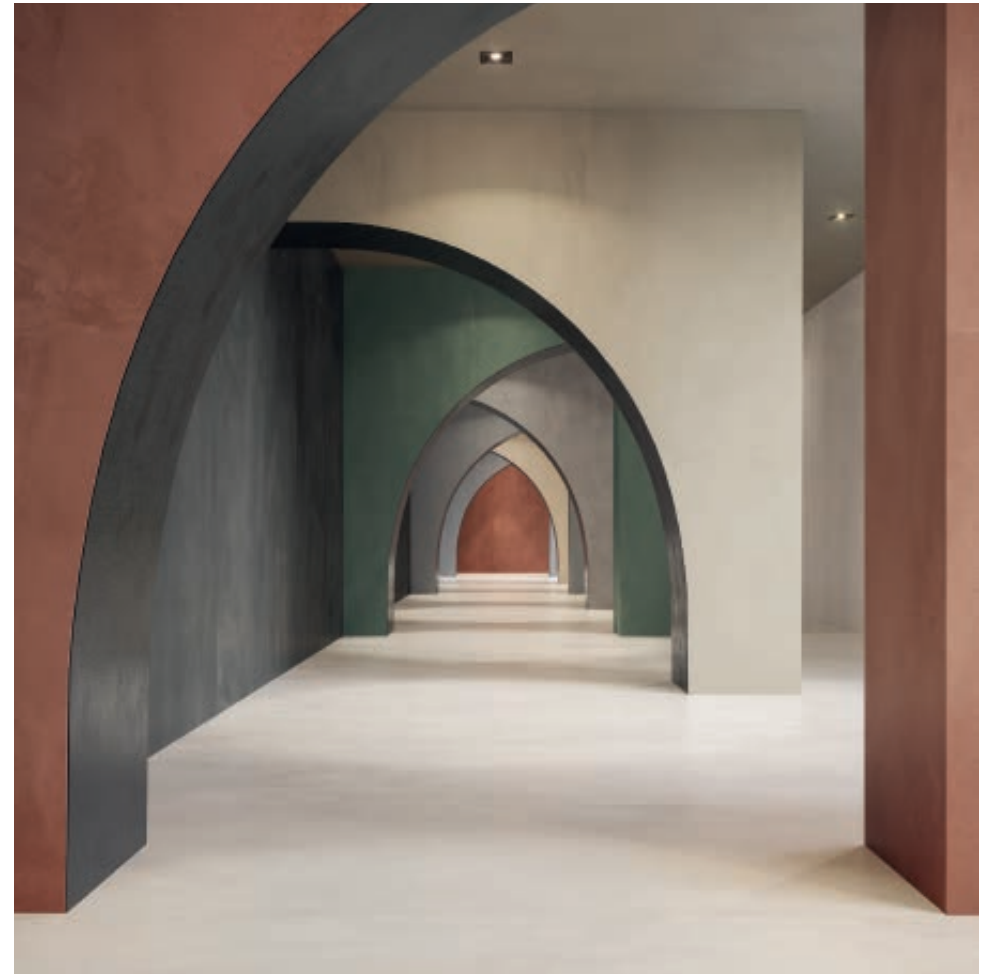



Kelemi

Technical data sheet - ISO 10545 average values

| | | |
|----|---|---|
| 3 | Water absorption | Conforms |
| 4 | Modulus of rupture Breaking strength | $\geq 45 \text{ N/mm}^2$ $\geq 2000 \text{ N}$ |
| 12 | Frost resistance | Conforms |
| 13 | Chemical resistance | A - LA - HA |
| 14 | Stain resistance | Class 5 |
| | Slip resistance | Nat R10 AS R11/B |
| | Pendulum test - Slider 96 (Shod) wet | $\geq 36 \text{ PTV}$ |

Sustainability information



Cleaning and maintenance advice

Initial washing

The initial washing is fundamental for good treatment results. The initial washing is aimed at removing any laying residues and building grime.

Product: Deterdek Pro

Routine maintenance

The aim of the routine maintenance is to remove dirt and scuff marks. Must be carried out regularly.

Product: Cleaner Pro

Special maintenance

Special maintenance is carried out in case of very stubborn dirt, when the routine maintenance is not enough to restore the original look of the surface.

Product: PS/87 Pro

Please see www.filasolutions.com for methods of use, dilution and coverage.