

Material: **Ceramic** | Appearance: **Uniform** | Application: **Walls**

24 Colours   4 Finishes   1 Tile size

# Kos

Kos offers an expansive range of coloured bevelled tiles, suitable for internal wall applications.



Shade variation: V1 uniform



## Gloss



AWC9051 LRV: 78   AWC9056 LRV: 67   AWC38166   AWC9645 LRV: 50   AWC9644 LRV: 27   AWC9058 LRV: 4   AWC9642 LRV: 29



AWC9641 LRV: 0   AWC9643 LRV: 6   AWC9646 LRV: 1   AWC38167   AWC9059 LRV: 0   AWC9099 LRV: 0   AWC9057 LRV: 0



AWC9098 LRV: 16

## Crackle




AWC38124 LRV: 63   AWC38125 LRV: 0   AWC38126 LRV: 1   AWC38127 LRV: 0   AWC38128 LRV: 0   AWC9050 LRV: 85   AWC38168

## Matt

## Metallic



AWC9054   AWC9055

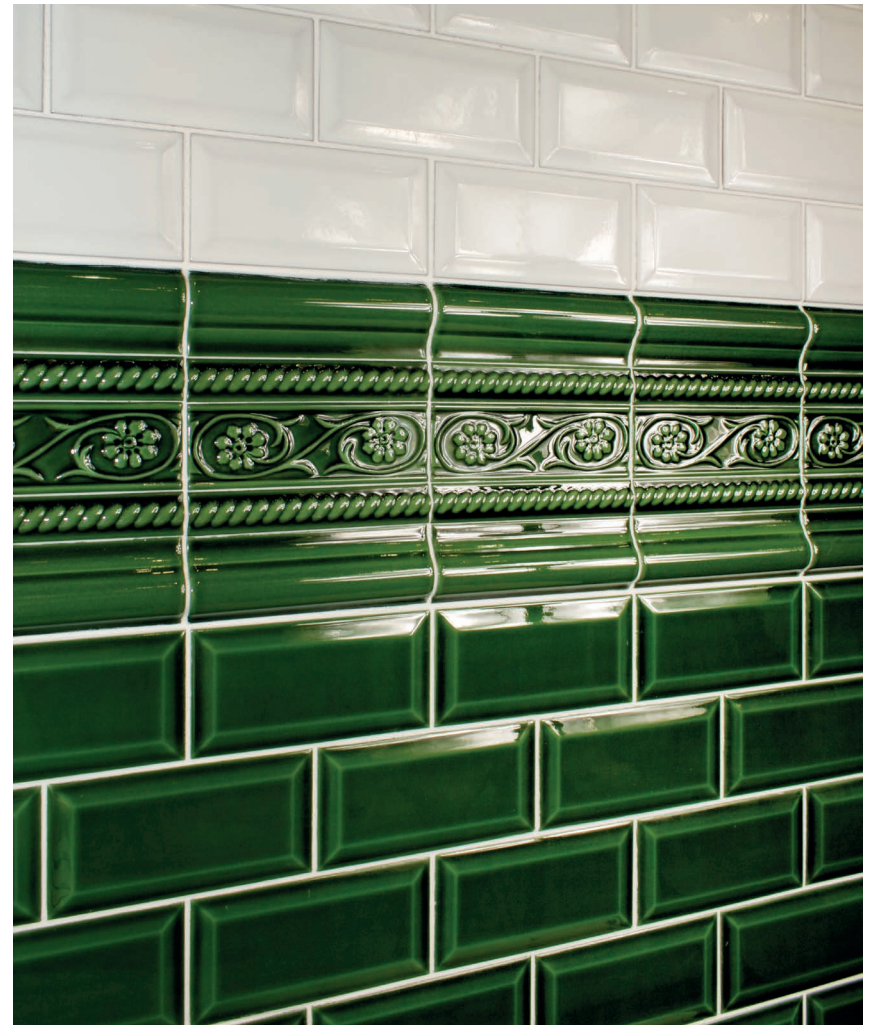

LRV and PTV values can vary batch to batch, please contact for advice. Swatch colours may vary, samples should be requested.

www.grestec.co.uk | T: 0345 130 2241 | E: sales@grestec.co.uk

Find us on:

Material: **Ceramic** | Appearance: **Uniform** | Application: **Walls**



# Kos



## Formats

|   | Sizes (mm) | >  < | Finishes |
|---|------------|------|----------|
| 1 | 75x150     | 10mm | Bevelled |

1



LRV and PTV values can vary batch to batch, please contact for advice.  
Swatch colours may vary, samples should be requested.

[www.grestec.co.uk](http://www.grestec.co.uk) | T: 0345 130 2241 | E: [sales@grestec.co.uk](mailto:sales@grestec.co.uk)

Find us on:    

Material: **Ceramic** | Appearance: **Uniform** | Application: **Walls**



# Kos

## Technical data sheet - ISO 10545 average values

|    |                     |           |
|----|---------------------|-----------|
| 3  | Water absorption    | 16-16%    |
| 11 | Crazing resistance  | Qualified |
| 13 | Chemical resistance | Class GHA |
| 14 | Stain resistance    | Class 5   |

## Important information - Metallic tiles

The special metallic glaze of these tiles is particularly acid-sensitive. Anti-limescale products should not be used for ordinary maintenance. We recommend to use a natural cleaner such as Fila Cleaner. **Do not use aggressive cleaning products such as bleach or ammonia.** Complaints due to a laying or fixing mistakes will not be accepted.

## Sustainability information



## Cleaning and maintenance advice

### Before grouting \*crackle tiles

A pre grout protector Fila PRW200 is advised to protect the tiles; this is a temporary seal that when cleaning the grout will wash off.

### Initial washing

The initial washing is fundamental for good treatment results. The initial washing is aimed at removing any laying residues and building grime.  
Product: Cloth

### Impregnating \*crackle tiles

It is also recommended to seal the body of the crackle effect tiles with Fila MP90.

### Routine maintenance

The aim of the routine maintenance is to remove dirt and scuff marks. Must be carried out regularly.  
Product: Cleaner Pro

Please see [www.filasolutions.com](http://www.filasolutions.com) for methods of use, dilution and coverage.

LRV and PTV values can vary batch to batch, please contact for advice. Swatch colours may vary, samples should be requested.

[www.grestec.co.uk](http://www.grestec.co.uk) | T: 0345 130 2241 | E: [sales@grestec.co.uk](mailto:sales@grestec.co.uk)

Find us on:    