



Fistral

Fistral combines the timeless appeal of natural stone with the superior performance of porcelain stoneware, offering exceptional versatility. Its tiles feature irregular veining, delicate nuvolato patterns, and soft, nuanced tones that highlight both color and texture, evoking the look and feel of authentic stone. Select sizes achieve an ≥ 36 PTV in natural finish.



PDCB51067
LRV: 53



PDCB51068 *
PDCB51068THK
LRV: 36



PDCB51069 *
PDCB51069THK
LRV: 42



PDCB51070 *
PDCB51070THK
LRV: 46



PDCB51071
LRV: 33




PDCB51072
LRV: 14

Shade variation: V2 moderate



Size (mm)	Thickness	PTV Wet Slider 96	PTV Wet Slider 55
1 1200x1200	9	Brushed	Brushed
2 600x1200	9	Brushed	Brushed
3 600x1200 THK*	20	Natural ≥ 36 PTV	Natural ≥ 38 PTV
4 600x600	9	Brushed	Brushed
5 600x600 THK*	20	Thick ≥ 36 PTV	Thick ≥ 38 PTV
6 300x600	9	Brushed	Brushed
7 50x50 mos on 300x300	9	Natural ≥ 36 PTV	Natural ≥ 38 PTV
8 50x150 mos on 300x300	9	Brushed	Brushed
9 STP MOS on 300x600	9	Brushed	Brushed
10 300x1200 ST1	9	Brushed	Brushed
11 330x1200 ST2	9	Brushed	Brushed
12 330x1200 corner	9	Brushed	Brushed
13 70x600 SK	9	Brushed	Brushed

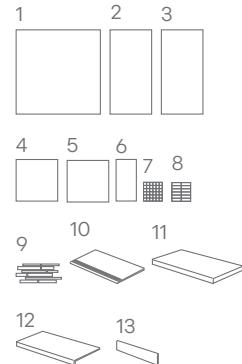

PDCB51072

LRV and PTV values can vary batch to batch, please contact for advice. PTV values refer to Slider 96 (shod) – Wet (unless stated). Swatch colours may vary, samples should be requested.

www.grestec.co.uk | T: 0345 130 2241 | E: sales@grestec.co.uk

Find us on:

Material: **Porcelain** | Appearance: **Stone** | Application: **Walls and Floors**



Fistral



Above
PDCB51067



Right
PDCB51068



Above
PDCB51069

LRV and PTV values can vary batch to batch, please contact for advice. PTV values refer to Slider 96 (shod) – Wet (unless stated). Swatch colours may vary, samples should be requested.

www.grestec.co.uk | T: 0345 130 2241 | E: sales@grestec.co.uk
Find us on:



Fistral

Technical data sheet - ISO 10545 average values

3	Water absorption	< 0,1%
4	Flexural strength	45 N/mm ²
6	Deep abrasion resistance	≤ 150 mm ³
8	Linear thermal expansion	6 x 10 ⁻⁶
13	Chemical resistance	Class A
14	Stain resistance	Class 4-5
	Pendulum test - Slider 96 (Shod)	NAT ≥36PTV wet THK ≥36PTV wet
	Pendulum test - Slider 55 (Barefoot)	NAT ≥38PTV wet THK ≥38PTV wet

Sustainability information



Cleaning and maintenance advice

Initial washing

The initial washing is fundamental for good treatment results. The initial washing is aimed at removing any laying residues and building grime.
Product: Deterdek Pro

Routine maintenance

The aim of the routine maintenance is to remove dirt and scuff marks. Must be carried out regularly.
Product: Cleaner Pro

Special maintenance

Special maintenance is carried out in case of very stubborn dirt, when the routine maintenance is not enough to restore the original look of the surface.
Product: PS/87 Pro

Please see www.filasolutions.com for methods of use, dilution and coverage.