

Material: **Porcelain** | Appearance: **Wood** | Application: **Walls and floors**

6 Colours   3 Finishes   6 Tile sizes

# Blyton Hi-Tech

The Blyton Hi-Tech collection offers timber-effect planks with natural veining, available in nine neutral wood tones, each showcasing a V3 shade variation for a realistic look. With a high slip resistance rating of  $\geq 36$  PTV, the collection is ideal for commercial applications. Some colours are available in a 20mm thickness suitable for external paving.



Shade variation: V3 - High



10mm thick



TMCE51669  
LRV: 33



TMCE51670  
LRV: 31



TMCE51671  
LRV: 31



TMCE51672  
LRV: 20

9mm thick



TMCE51666  
LRV: 35



TMCE51668  
LRV: 32



Blyton Hi-Tech TMCE51671



LRV and PTV values can vary batch to batch, please contact for advice. PTV values refer to Slider 96 Shod - Wet (unless stated). Swatch colours may vary, samples should be requested.

www.grestec.co.uk | T: 0345 130 2241 | E: sales@grestec.co.uk

Find us on:






# Blyton Hi-Tech



Blyton Hi-Tech TMCE51669BRU

## Formats

Sizes (mm)	Thickness	 PTV Wet Slider 96	 PTV Wet Slider 55	Colour availability
1 400x1200 THK	20mm	-	Thick $\geq 42$ PTV	TMCE51670, 71
2 300x1200	9/10mm	Brushed	-	TMCE51669, 70, 71, 72
3 200x1200	9/10mm	Natural $\geq 36$ PTV Brushed	-	All colours All colours
4 72x335 CHEV on 292x335	9mm	Brushed	-	TMCE51666, 68
5 50x50 MOS	9/10mm	Natural $\geq 36$ PTV Brushed	-	TMCE51666, 68 All colours
6 200x1200x40 ST	9mm	Brushed	-	TMCE51666, 68
7 50x1200 SK	9mm	Brushed	-	TMCE51666, 68

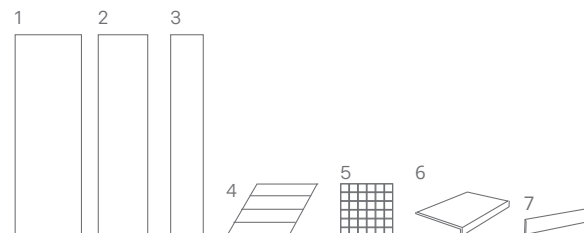



# Blyton Hi-Tech



Above  
Blyton Hi-Tech TMCE51666THK

Right  
Blyton Hi-Tech TMCE51670



Above  
Blyton Hi-Tech TMCE51668BRU



# Blyton Hi-Tech

## Technical data sheet - ISO 10545 average values

2	Dimension and surface quality	<b>Conforms</b>
3	Water absorption	<b>Conforms</b>
4	Flexural strength Breaking strength	<b>Conforms</b> <b>Conforms</b>
6	Deep abrasion resistance	<b>&lt;150mm<sup>3</sup></b>
8	Linear thermal expansion	<b>&lt;9 (MK)-1</b>
9	Thermal shock resistance	<b>Resistant</b>
12	Frost resistance	<b>Resistant</b>
13	Chemical resistance	<b>Unaffected</b>
14	Stain resistance	<b>Class 5</b>
	Pendulum test - Slider 96 (Shod) Wet	<b>NAT ≥36PTV</b>
	Pendulum test - Slider 55 (Barefoot) Wet	<b>THK ≥42PTV</b>

LRV and PTV values can vary batch to batch, please contact for advice. PTV values refer to Slider 96 Shod – Wet (unless stated). Swatch colours may vary, samples should be requested.

## Sustainability information



### Cleaning and maintenance advice

#### Initial washing

The initial washing is fundamental for good treatment results. The initial washing is aimed at removing any laying residues and building grime.  
Product: Deterdek Pro

#### Routine maintenance

The aim of the routine maintenance is to remove dirt and scuff marks. Must be carried out regularly.  
Product: Cleaner Pro

#### Special maintenance

Special maintenance is carried out in case of very stubborn dirt, when the routine maintenance is not enough to restore the original look of the surface.  
Product: PS/87 Pro

Please see [www.filasolutions.com](http://www.filasolutions.com) for methods of use, dilution and coverage.