

Material: **Porcelain** | Appearance: **Terrazzo** | Application: **Walls and floors**

3 Colours 1 Finishes 2 Tile sizes

Samone

Samone presents three terrazzo-inspired colours in 600x600 and 600x1200mm sizes. Samone can be used to create stylish environments that embody a visually rich aesthetic.



Shade variation: V2 moderate




GRCF37781



GRCF37782



GRCF37783

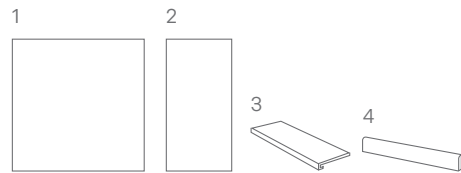

	Sizes (mm)	> <	Finishes
1	1200x1200	9mm	NAT (R10) ≥36 PTV
2	600x1200	9mm	NAT (R10) ≥36 PTV
3	330x1200x40 ST	9mm	NAT (R10) ≥36 PTV
4	70x600 SK	9mm	NAT (R10) ≥36 PTV



LRV and PTV values can vary batch to batch, please contact for advice. Swatch colours may vary, samples should be requested.

www.grestec.co.uk | T: 0345 130 2241 | E: sales@grestec.co.uk

Find us on:



Samone



Above:
Samone GRCF37782



Above:
Samone GRCF37781



Samone

Technical data sheet - ISO 10545 average values

2	Sizes	Conforms
3	Water absorption	Conforms
4	Modulus of rupture Breaking strength	Conforms Conforms
6	Scratch resistance	< 150 mm3
8	Linear thermal expansion	<6,8 MK-1
9	Thermal shock resistance	Resistant
12	Frost resistance	Resistant
13	Chemical resistance	Resistant
14	Stain resistance	Resistant
	Slip resistance	NAT R10 ≥36 PTV

LRV and PTV values can vary batch to batch, please contact for advice.
Swatch colours may vary, samples should be requested.

Sustainability information



Cleaning and maintenance advice

Initial washing

The initial washing is fundamental for good treatment results. The initial washing is aimed at removing any laying residues and building grime.
Product: Deterdek Pro

Routine maintenance

The aim of the routine maintenance is to remove dirt and scuff marks. Must be carried out regularly.
Product: Cleaner Pro

Special maintenance

Special maintenance is carried out in case of very stubborn dirt, when the routine maintenance is not enough to restore the original look of the surface.
Product: PS/87 Pro

Please see www.filasolutions.com for methods of use, dilution and coverage.