

Material: **Porcelain** | Appearance: **Marble** | Application: **Walls and floors**

4

4

9

Colours
Finishes
Tile sizes

# Cassandra

Inspired by the timeless beauty of marble, Cassandra combines colours and veining inspired by precious marbles; Statuario, Saint Laurent and Travertino. Cassandra can be used to create chic, timeless interiors, suitable for both internal and external applications.



Shade variation: V2 - moderate



SCAA5082




SCAA5083



SCAA5084




SCAA5085

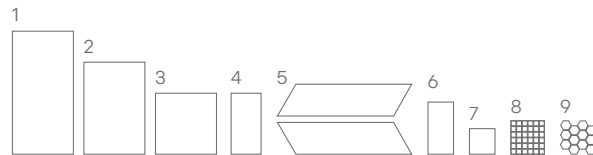

	Sizes (mm)	>  <	Finishes		
1	600x1200	10mm	NAT (R10) / ≥36 PTV	-	POL
2	600x900 THK	20mm	-	THK (R11)	-
3	600x600	10mm	NAT (R10) / ≥36 PTV	-	POL
4	300x600	10mm	NAT (R10) / ≥36 PTV	-	POL
5	70x260 CHEV	10mm	NAT (R10) / ≥36 PTV	-	-
6	225x450 TUMB*	10mm	-	AS (R11/C)	-
7	225x225 TUMB*	10mm	-	AS (R11/C)	-
8	50x50 MOS on 300x300 MESH	10mm	NAT (R10) / ≥36 PTV	-	-
9	HEX MOS MIX on 295x340 MESH	10mm	NAT/POL MIX		

\*225x450 and 225x225 have a tumbled uneven edge

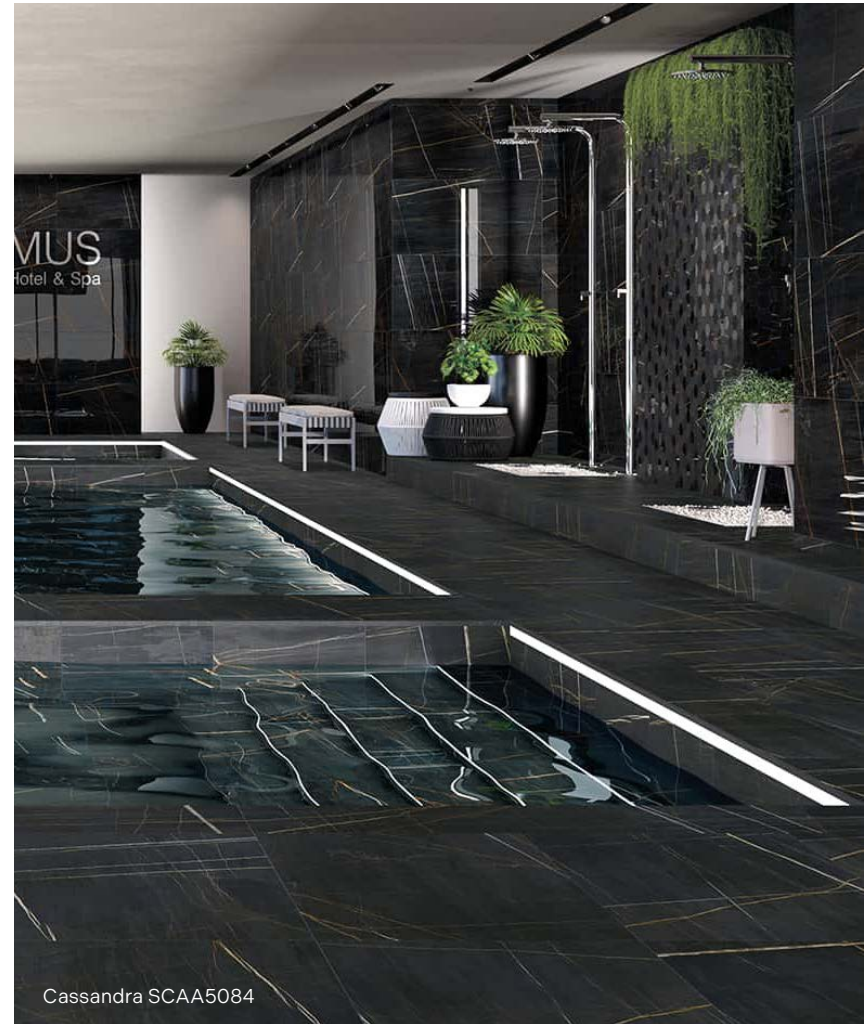

Cassandra SCAA5084

LRV and PTV values can vary batch to batch, please contact for advice. Swatch colours may vary, samples should be requested.

www.grestec.co.uk | T: 0345 130 2241 | E: sales@grestec.co.uk

Find us on:

Material: **Porcelain** | Appearance: **Marble** | Application: **Walls and floors**



# Cassandra



Above  
Cassandra SCAA5083

Right  
Cassandra SCAA5083THK



Above  
Cassandra SCAA5082 SCAA5084

LRV and PTV values can vary batch to batch, please contact for advice.  
Switch colours may vary, samples should be requested.

[www.grestec.co.uk](http://www.grestec.co.uk) | T: 0345 130 2241 | E: [sales@grestec.co.uk](mailto:sales@grestec.co.uk)

Find us on:



# Cassandra

## Technical data sheet - ISO 10545 average values

2	Sizes	<b>Conforms</b>
3	Water absorption	< 0,1%
4	Modulus of rupture Breaking strength	> 2500 N > 45 N/mm <sup>2</sup>
8	Linear thermal expansion	< 9 (MK-1)
9	Resistance to thermal shock	<b>Resistant</b>
12	Frost resistance	<b>Resistant</b>
13	Chemical resistance	<b>Class A</b>
14	Stain resistance	<b>Class 5</b>
	Slip resistance	<b>NAT R10 ≥36PTV AS R11/C</b>

## Sustainability information



## Cleaning and maintenance advice

### Initial washing

The initial washing is fundamental for good treatment results. The initial washing is aimed at removing any laying residues and building grime.  
Product: Deterdek Pro

### Routine maintenance

The aim of the routine maintenance is to remove dirt and scuff marks. Must be carried out regularly.  
Product: Cleaner Pro

### Special maintenance

Special maintenance is carried out in case of very stubborn dirt, when the routine maintenance is not enough to restore the original look of the surface.  
Product: PS/87 Pro

Please see [www.filasolutions.com](http://www.filasolutions.com) for methods of use, dilution and coverage.