


Heart of Marble

16 Colours | 1 Finish | 12 Size

Inspired by marble and reproduced using the most advanced porcelain tile technology. Heart of Marble is suitable for a range of applications, thanks to the hard-wearing qualities of porcelain.



TMDB46143
LRV 76




TMDB46144
LRV 62



TMDB46145
LRV 48




TMDB46146
LRV 26




TMDB46147
LRV 40




TMDB46148
LRV 40




TMDB46149
LRV 18



TMDB51686
LRV 72



TMDB51687
LRV 4




TMDB51688
LRV 11




TMDB51689
LRV 67




TMDB51690
LRV 51




TMDB51691
LRV 19



TMDB52210



TMDB52211




TMDB52212



TMDB52213



Heart of Marble

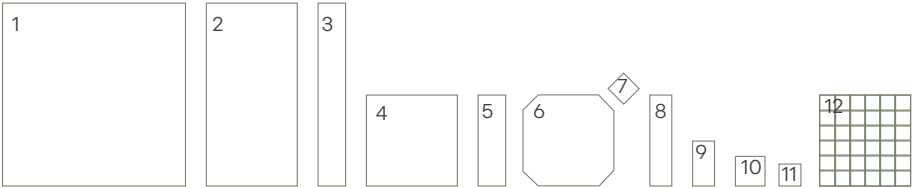

Sizes (mm)	Thickness		Availability
1 600×600	9.5	Natural ≥36 PTV	All colours
2 300×600	9.5	Natural ≥36 PTV	All colours
3 100×600	9.5	Natural ≥36 PTV	All colours
4 300×300	9.5	Natural ≥36 PTV	All colours
5 100×300	9.5	Natural ≥36 PTV	All colours
6 200×200 OCT*	9.5	Natural ≥36 PTV	TMDB51686, 89 only
7 46×46 DOT	9.5	Natural ≥36 PTV	TMDB51686-91 only
8 75×300	9.5	Natural ≥36 PTV	All colours
9 75×150	9.5	Natural ≥36 PTV	All colours
10 100×100	9.5	Natural ≥36 PTV	All colours
11 75×75	9.5	Natural ≥36 PTV	All colours
12 50×50 mos on 300×300 mesh	9.5	Natural ≥36 PTV	All colours




Heart of Marble

Laying schemes




Comp 1




(mm)	% mq
600×600	73%
100×600	24%
100×100	2%

Comp 2




(mm)	% mq
300×300	64%
75×300	32%
75×75	4%

Comp 3




(mm)	% mq
600×600	97%
100×100	3%

Comp 4




(mm)	% mq
300×300	94%
75×75	6%

Comp 5




(mm)	% mq
200×200	95%
46×46	5%

Comp 6



(mm)	% mq
75×300	50%
75×300	50%

Comp 7




(mm)	% mq
100×300	43%
100×300	43%
100×100	14%

Comp 8



(mm)	% mq
75×600	50%
75×600	50%

Comp 9



(mm)	% mq
75×300	50%
75×300	50%



Heart of Marble



Above: Heart of Marble TMDB51690 TMDB51691
Right: Heart of Marble TMDB51686 TMDB51688



Above: Heart of Marble TMDB51686 TMDB51687



Heart of Marble



ISO 10545 Results

2	Sizes	Conforms
3	Water absorption	Conforms
4	Breaking strength Modulus of rupture	Conforms Conforms
6	Abrasion resistance	< 150 mm ³
8	Linear Thermal Expansion	≤9 MK-1
9	Thermal Shock Resistance	Resistant
12	Frost Resistance	Resistant
13	Chemical Resistance	UA
14	Stain Resistance	Class 5

Slip rating

Pendulum test - Slider 96 (Shod) Wet	Natural ≥36 PTV
---	-----------------

Cleaning and maintenance advice

Initial washing

The initial washing is fundamental for good treatment results. The initial washing is aimed at removing any laying residues and building grime.

Product: Deterdek Pro

Routine maintenance

The aim of the routine maintenance is to remove dirt and scuff marks. Must be carried out regularly.

Product: Cleaner Pro

Special maintenance

Special maintenance is carried out in case of very stubborn dirt, when the routine maintenance is not enough to restore the original look of the surface.

Product: PS/87 Pro

Please see www.filasolutions.com for methods of use, dilution and coverage.

LRVs and PTVs

LRV and PTV values may vary between batches; please contact us for guidance.

Document + web colours

Swatch colours may differ from final production, samples are recommended.

Sustainability



Shade variation

