

Material: Porcelain | Appearance: Stone | Application: Walls and Floors

12 Colours

1 Finish

12 Tile size

Heart of Marble


Inspired by marble and reproduced using the most advanced porcelain tile technology. Heart of Marble is suitable for a range of applications, thanks to the hard-wearing qualities of porcelain.




TMDB51686




TMDB46148




TMDB46149



TMDB51687




TMDB51688



TMDB46143



TMDB51689




TMDB46145




TMDB46146



TMDB51690



TMDB46147



TMDB51691



Heart of Marble TMDB51686 TMDB51687

LRV and PTV values may vary between batches; please contact us for guidance.
Swatch colours may differ from final production—samples are recommended.
www.grestec.co.uk | T: 0345 130 2241 | E: sales@grestec.co.uk
Find us on:






Heart of Marble



Heart of Marble TMDB51686 TMDB51688

Formats

Sizes (mm)	Thickness	PTV Wet Slider 96	Availability
1 600×600	9.5	Natural ≥36 PTV	All
2 300×600	9.5	Natural ≥36 PTV	All
3 100×600	9.5	Natural ≥36 PTV	All
4 300×300	9.5	Natural ≥36 PTV	All
5 100×300	9.5	Natural ≥36 PTV	All
6 200×200 OCT*	9.5	Natural ≥36 PTV	TMDB51686, 89 only
7 46×46 DOT	9.5	Natural ≥36 PTV	TMDB51686-91 only
8 75×300	9.5	Natural ≥36 PTV	All
9 75×150	9.5	Natural ≥36 PTV	All
10 100×100	9.5	Natural ≥36 PTV	All
11 75×75	9.5	Natural ≥36 PTV	All
12 50×50 mos on 300×300 mesh	9.5	Natural ≥36 PTV	All

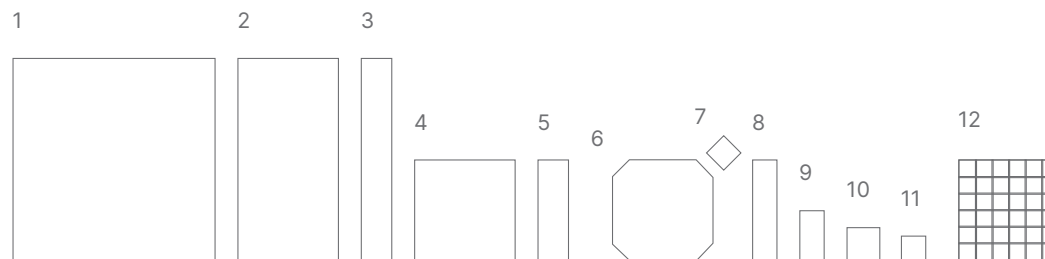

LRV and PTV values may vary between batches; please contact us for guidance.
 Swatch colours may differ from final production—samples are recommended.
www.grestec.co.uk | T: 0345 130 2241 | E: sales@grestec.co.uk

Find us on:




Heart of Marble



Heart of Marble TMDB51689 TMDB51690

Laying schemes

Comp 1




(mm)	% mq
600×600	73%
100×600	24%
100×100	2%

Comp 2




(mm)	% mq
300×300	64%
75×300	32%
75×75	4%

Comp 3




(mm)	% mq
600×600	97%
100×100	3%

Comp 4



(mm)	% mq
300×300	94%
75×75	6%

Comp 5




(mm)	% mq
200×200	95%
46×46	5%

Comp 6



(mm)	% mq
75×300	50%
75×300	50%

Comp 7




(mm)	% mq
100×300	43%
100×300	43%
100×100	14%

Comp 8







(mm)	% mq
75×600	50%
75×600	50%

Comp 9



(mm)	% mq
75×300	50%
75×300	50%

LRV and PTV values may vary between batches; please contact us for guidance.
Swatch colours may differ from final production—samples are recommended.
www.grestec.co.uk | T: 0345 130 2241 | E: sales@grestec.co.uk

Find us on:    



Heart of Marble







Above
Heart of Marble TMDB46145 TMDB46146

Right
Heart of Marble TMDB51688 TMDB51691
TMDB46189 Basketweave



Above
Heart of Marble TMDB51686 TMDB51688

LRV and PTV values may vary between batches; please contact us for guidance.
Swatch colours may differ from final production—samples are recommended.
www.grestec.co.uk | T: 0345 130 2241 | E: sales@grestec.co.uk

Find us on:    



Heart of Marble

Technical data sheet - ISO 10545 average values

2	Sizes	Conforms
3	Water absorption	Conforms
4	Breaking strength	Conforms
4	Modulus of rupture	Conforms
6	Abrasion resistance	Average: < 150 mm ³
8	Thermal expansion coefficient	≤9 MK-1
9	Thermal shock resistance	Resistant
12	Frost resistance	Resistant
13	Chemical resistance	UA
14	Stain resistance	Class 5
	Slip resistance	NAT R10
	Pendulum test - Slider 96 (Shod)	Natural ≥36 PTV

Sustainability information



Cleaning and maintenance advice

Initial washing

The initial washing is fundamental for good treatment results. The initial washing is aimed at removing any laying residues and building grime.
Product: Deterdek Pro

Routine maintenance

The aim of the routine maintenance is to remove dirt and scuff marks. Must be carried out regularly.
Product: Cleaner Pro

Special maintenance

Special maintenance is carried out in case of very stubborn dirt, when the routine maintenance is not enough to restore the original look of the surface.
Product: PS/87 Pro

Please see www.filasolutions.com for methods of use, dilution and coverage.

LRV and PTV values may vary between batches; please contact us for guidance.
Swatch colours may differ from final production—samples are recommended.
www.grestec.co.uk | T: 0345 130 2241 | E: sales@grestec.co.uk

Find us on: