


Material: **Porcelain** | Appearance: **Stone** | Application: **Walls and floors**



Legacy Stoneworks

Legacy Stoneworks reinterprets six iconic stones, celebrating their aesthetic value and cultural heritage through refined elegance. Each surface reflects careful research and preserves the memory of the landscapes that inspired it, expressed through authentic textures and balanced tones. Offered in Honed and Natural finishes and a range of formats, the collection presents a timeless vision of stone for projects defined by quality, character, and enduring beauty.



Shade variation: V2 moderate



T1 600x1200mm







Arrow 240x500mm



LRV and PTV values can vary batch to batch, please contact for advice.
Swatch colours may vary, samples should be requested.



www.grestec.co.uk | T: 0345 130 2241 | E: sales@grestec.co.uk


Find us on:    



Legacy Stoneworks

Formats

Sizes (mm)		Thickness	 PTV Wet Slider 96	 PTV Wet Slider 55
1	1200x1200	8.5	Natural ≥36 PTV Honed	Natural 25-35 PTV Honed
2	600x1200	8.5	Natural ≥36 PTV Anti-slip ≥45 PTV Honed	Natural 25-35 PTV Anti-slip ≥40 PTV Honed
3	600x1200 T1	8.5	Natural ≥36 PTV	Natural 25-35 PTV
4	600x1200 THK	20	Thick ≥45 PTV	Thick ≥40 PTV
5	600x600	8.5	Natural ≥36 PTV	Natural 25-35 PTV
6	300x600	8.5	Natural ≥36 PTV	Natural 25-35 PTV
7	50x50 mos on 300x300 mesh	8.5	Natural ≥36 PTV	Natural 25-35 PTV
8	297x283 GEO	8.5	Natural ≥36 PTV	Natural 25-35 PTV
9	240x500 arrow dec	8.5	Natural ≥36 PTV	Natural 25-35 PTV
10	75x600 SK	8.5	Natural ≥36 PTV Honed	Natural 25-35 PTV Honed

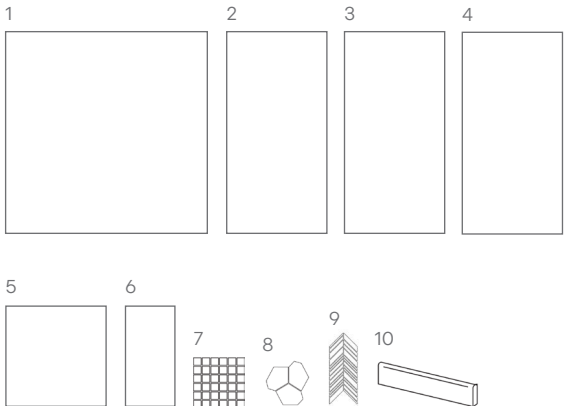



Legacy Stoneworks

Technical data sheet - ISO 10545 average values

3	Water absorption	<0,1 %
4	Flexural strength	45 N/mm ²
6	Resistance to deep abrasion	<150 mm ²
12	Frost resistance	Resistant
13	Chemical resistance	Natural A-LA-HA Honed A-LB-HB
14	Stain resistance	Class 5
	Pendulum test - Slider 96 Shod (wet)	Natural ≥36PTV Anti-slip ≥45PTV Thick ≥45PTV
	Pendulum test - Slider 55 Barefoot (wet)	Natural 25-35PTV Anti-slip ≥40PTV Thick ≥40PTV

Sustainability information



Cleaning and maintenance advice

Initial washing

The initial washing is fundamental for good treatment results. The initial washing is aimed at removing any laying residues and building grime.

Product: Deterdek Pro

Routine maintenance

The aim of the routine maintenance is to remove dirt and scuff marks. Must be carried out regularly.

Product: Cleaner Pro

Special maintenance

Special maintenance is carried out in case of very stubborn dirt, when the routine maintenance is not enough to restore the original look of the surface.

Product: PS/87 Pro

Please see www.filasolutions.com for methods of use, dilution and coverage.