

Material: Porcelain | Appearance: Stone | Application: Walls and Floors


6 Colours

4 Finishes

9 Tile sizes

# Legacy Stoneworks

Legacy Stoneworks reinterprets six iconic stones, celebrating their aesthetic value and cultural heritage through refined elegance. Each surface reflects careful research and preserves the memory of the landscapes that inspired it, expressed through authentic textures and balanced tones.

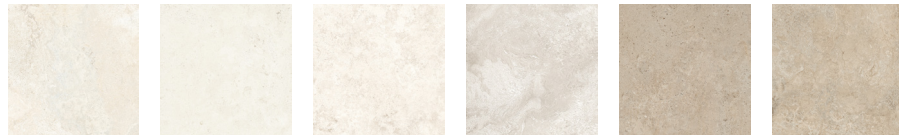

BOEA56407 LRV 57    BOEA56408 LRV 60    BOEA56409 LRV 49    BOEA56410 LRV 53    BOEA56411 LRV 40    BOEA56412 LRV 47

T1 600x1200mm




BOEA56407T1    BOEA56408T1    BOEA56409T1    BOEA56410T1    BOEA56411T1    BOEA56412T1

Arrow 240x500mm



BOEA56413    BOEA56414    BOEA56415    BOEA56416    BOEA56417    BOEA56418

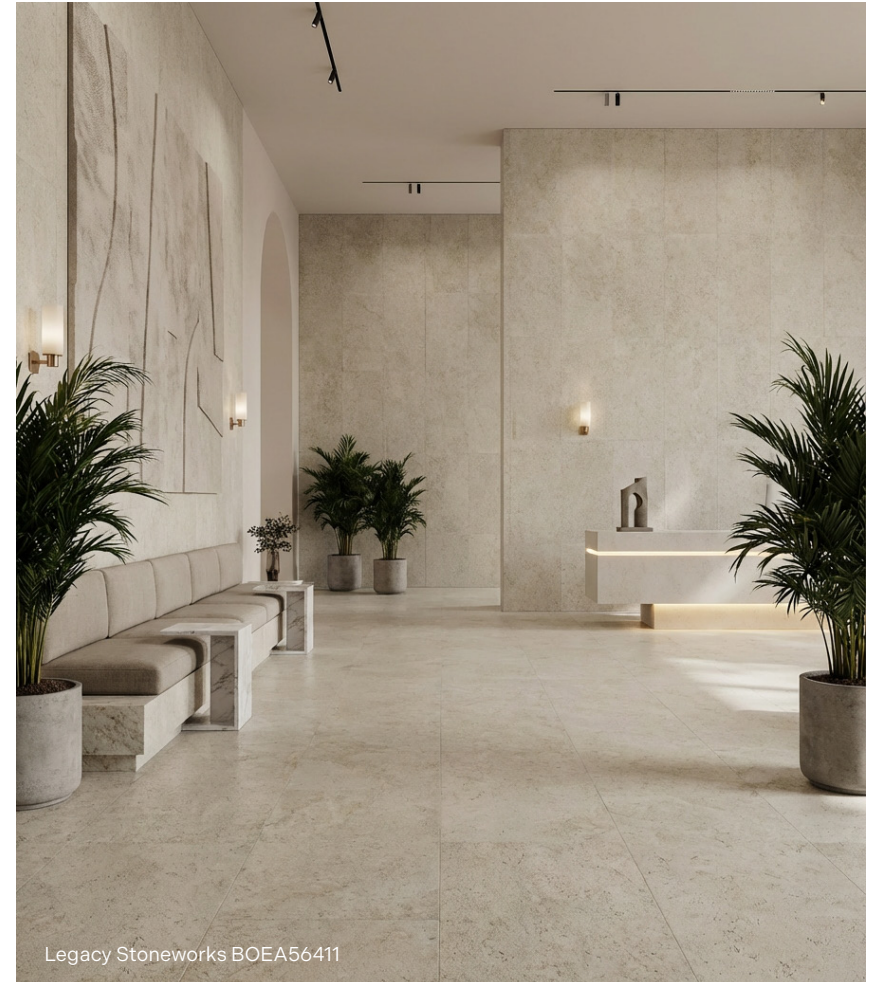

Legacy Stoneworks BOEA56411

LRV and PTV values may vary between batches; please contact us for guidance.  
 Swatch colours may differ from final production—samples are recommended.  
[www.grestec.co.uk](http://www.grestec.co.uk) | T: 0345 130 2241 | E: [sales@grestec.co.uk](mailto:sales@grestec.co.uk)  
 Find us on:







# Legacy Stoneworks




Legacy Stoneworks BOEA56412

## Formats





|    | Sizes (mm)                | Thickness |  PTV Wet Slider 96 |  PTV Wet Slider 55 |
|----|---------------------------|-----------|---|---|
| 1  | 1200×1200                 | 8.5       | Natural ≥36 PTV<br>Honed  | Natural 25-35 PTV<br>Honed  |
| 2  | 600×1200                  | 8.5       | Natural ≥36 PTV<br>Anti-slip ≥45 PTV<br>Honed   | Natural 25-35 PTV<br>Anti-slip ≥40 PTV<br>Honed   |
| 3  | 600×1200 T1               | 8.5       | Natural ≥36 PTV   | Natural 25-35 PTV   |
| 4  | 600×1200 THK              | 20        | Thick ≥45 PTV   | Thick ≥40 PTV   |
| 5  | 600×600                   | 8.5       | Natural ≥36 PTV   | Natural 25-35 PTV   |
| 6  | 300×600                   | 8.5       | Natural ≥36 PTV   | Natural 25-35 PTV   |
| 7  | 50×50 mos on 300×300 mesh | 8.5       | Natural ≥36 PTV   | Natural 25-35 PTV   |
| 8  | 297×283 GEO               | 8.5       | Natural ≥36 PTV   | Natural 25-35 PTV   |
| 9  | 240×500 arrow dec         | 8.5       | Natural ≥36 PTV   | Natural 25-35 PTV   |
| 10 | 75×600 SK                 | 8.5       | Natural ≥36 PTV<br>Honed  | Natural 25-35 PTV<br>Honed  |
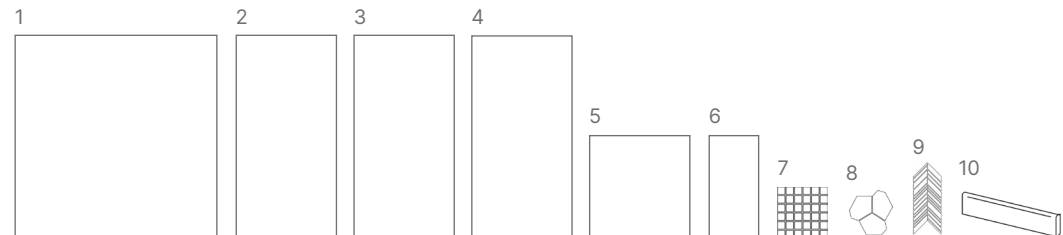
## Surface Roughness:

Anti-slip: Rz 56.38µm



LRV and PTV values may vary between batches; please contact us for guidance.  
Swatch colours may differ from final production—samples are recommended.  
www.grestec.co.uk | T: 0345 130 2241 | E: sales@grestec.co.uk

Find us on:    



# Legacy Stoneworks



Above  
Legacy Stoneworks BOEA56407

Right  
Legacy Stoneworks BOEA56410



Above  
Legacy Stoneworks BOEA56408, BOEA56408GEO



# Legacy Stoneworks







Above  
Legacy Stoneworks BOEA56407  
BOEA56407T1

Right  
Legacy Stoneworks BOEA56408GEO



Above  
Legacy Stoneworks BOEA56412 BOEA56417




LRV and PTV values may vary between batches; please contact us for guidance.  
Swatch colours may differ from final production—samples are recommended.  
[www.grestec.co.uk](http://www.grestec.co.uk) | T: 0345 130 2241 | E: [sales@grestec.co.uk](mailto:sales@grestec.co.uk)

Find us on:    



# Legacy Stoneworks

## Technical data sheet - ISO 10545 average values

|   |  |   |
|---|--|---|
| <b>3</b>  | Water absorption                         | <0,1 %  |
| <b>4</b>  | Flexural strength                        | 45 N/mm2  |
| <b>6</b>  | Resistance to deep abrasion              | <150 mm <sup>2</sup>  |
| <b>12</b>   | Frost resistance                         | <b>Resistant</b>  |
| <b>13</b>   | Chemical resistance                      | <b>Natural A-LA-HA<br/>Honed A-LB-HB</b>                      |
| <b>14</b>   | Stain resistance                         | <b>Class 5</b>  |
|    | Pendulum test - Slider 96 Shod (wet)     | <b>Natural ≥36PTV<br/>Anti-slip ≥45PTV<br/>Thick ≥45PTV</b>   |
|  | Pendulum test - Slider 55 Barefoot (wet) | <b>Natural 25-35PTV<br/>Anti-slip ≥40PTV<br/>Thick ≥40PTV</b> |
|  | Surface Roughness                        | <b>Anti-slip Rz 56.38µm</b>                                   |

## Sustainability information



## Cleaning and maintenance advice

### Initial washing

The initial washing is fundamental for good treatment results. The initial washing is aimed at removing any laying residues and building grime.

Product: Deterdek Pro

### Routine maintenance

The aim of the routine maintenance is to remove dirt and scuff marks. Must be carried out regularly.

Product: Cleaner Pro

### Special maintenance

Special maintenance is carried out in case of very stubborn dirt, when the routine maintenance is not enough to restore the original look of the surface.

Product: PS/87 Pro

Please see [www.filasolutions.com](http://www.filasolutions.com) for methods of use, dilution and coverage.

LRV and PTV values may vary between batches; please contact us for guidance.  
Swatch colours may differ from final production—samples are recommended.

[www.grestec.co.uk](http://www.grestec.co.uk) | T: 0345 130 2241 | E: [sales@grestec.co.uk](mailto:sales@grestec.co.uk)

Find us on: 