



Betonae

Betonae reinterprets the raw elegance of concrete with a refined, contemporary finish. Featuring a soft matt surface and subtle texture, it delivers a clean, architectural look with natural depth. Offered in a versatile range of neutral tones, Betonae is ideal for both residential and commercial spaces, creating calm, seamless interiors that feel modern, balanced, and timeless.



EBFS56505
LRV: 49


EBFS56506
LRV: 38

EBFS56507
LRV: 30

Shade variation: V3 high



Sizes (mm)	Thickness	PTV Wet Slider 96	PTV Wet Slider 55
1 600x1200	9.5	Natural ≥36 PTV	Natural 25-35 PTV
2 800x800	9.5	Natural ≥36 PTV	Natural 25-35 PTV
3 600x600	9.5	Natural ≥36 PTV Ultra Matt ≥45 PTV	Natural 25-35 PTV Ultra Matt ≥45 PTV
4 300x600	9.5	Natural ≥36 PTV Ultra Matt ≥45 PTV	Natural 25-35 PTV Ultra Matt ≥45 PTV
5 50x50 MOS5 on 300x300 mesh	9.5	Natural ≥36 PTV	Natural 25-35 PTV
ST1 300x600			
6 ST1 300x800	-	Natural ≥36 PTV	Natural 25-35 PTV
ST1 300x1200			
ST2 300x600			
7 ST2 300x800	-	Natural ≥36 PTV	Natural 25-35 PTV
ST2 300x1200			
SK 80x600			
8 SK 80x800	-	Natural ≥36 PTV	Natural 25-35 PTV
SK 80x1200			

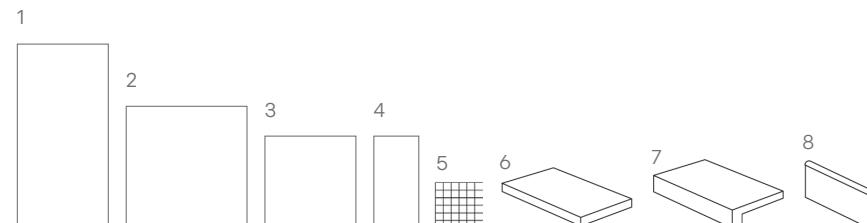

LRV and PTV values can vary batch to batch, please contact for advice. PTV values refer to Slider 96 Shod - Wet (unless stated). Swatch colours may vary, samples should be requested.

www.grestec.co.uk | T: 0345 130 2241 | E: sales@grestec.co.uk

Find us on:



Betonae

Technical data sheet - ISO 10545 average values

2	Sizes	Conforms
3	Water absorption	Ev < 0.2% (Grupo/ Group Bla)
4	Bending strength Breaking strength	>=45 N/mm ² >=2400 N
8	Linear thermal expansion	<9x10 ⁻⁶ °C ⁻¹
9	Linear thermal expansion	Conforms
11	Linear thermal expansion	Conforms
12	Frost resistance	Conforms
13	Chemical resistance	LA/HA A
14	Stain resistance	Class 5
	Pendulum test - Slider 96 (Shod) Wet	Natural ≥36 PTV Ultra Matt ≥45 PTV
	Pendulum test - Slider 55 (Barefoot) Wet	Natural 25-35 PTV Ultra Matt ≥45 PTV

Sustainability information



Cleaning and maintenance advice

Initial washing

The initial washing is fundamental for good treatment results. The initial washing is aimed at removing any laying residues and building grime.
Product: Deterdek Pro

Routine maintenance

The aim of the routine maintenance is to remove dirt and scuff marks. Must be carried out regularly.
Product: Cleaner Pro

Special maintenance

Special maintenance is carried out in case of very stubborn dirt, when the routine maintenance is not enough to restore the original look of the surface.
Product: PS/87 Pro

Please see www.filasolutions.com for methods of use, dilution and coverage.

LRV and PTV values can vary batch to batch, please contact for advice.
Swatch colours may vary, samples should be requested.

Find us on:

www.grestec.co.uk | T: +44 (0)345 130 2241 | E: sales@grestec.co.uk