

5 Colours    2 Finishes    5 Tile sizes

# Erde

Erde is a porcelain tile collection inspired by the natural character of earth and stone. Drawing from traditional construction techniques, it translates raw materiality into a clean, contemporary design language. Available in five earthy tones, its coloured body porcelain and subtle textures create depth, balance, and tactile authenticity. Ribbed finishes add rhythm and architectural expression. Durable and timeless, Erde brings a sense of calm, grounded elegance to any space.



EAFS56500  
LRV: 51

EAFS56501  
LRV: 17

EAFS56502  
LRV: 21

EAFS56503  
LRV: 27

EAFS56504  
LRV: 22

EAFS56500T1


EAFS56501T1

EAFS56502T1

EAFS56503T1

EAFS56504T1

	Sizes (mm)	Thickness	PTV Wet Slider 96	PTV Wet Slider 55
1	600x1200	9.5	Natural ≥40 PTV Ultra Matt ≥45 PTV	Natural ≥36 PTV Ultra Matt ≥45 PTV
2	600x1200 T1	10	Natural ≥40 PTV	Natural ≥36 PTV
3	600x600	9.5	Natural ≥40 PTV Ultra Matt ≥45 PTV	Natural ≥36 PTV Ultra Matt ≥45 PTV
4	300x600	9	Natural ≥40 PTV Ultra Matt ≥45 PTV	Natural ≥36 PTV Ultra Matt ≥45 PTV
5	50x50 MOS5 on 300x300 mesh	9	Natural ≥40 PTV	Natural ≥36 PTV
6	ST1 300x600 ST1 300x1200	-	Natural ≥40 PTV	Natural ≥36 PTV
7	ST2 300x600 ST2 300x1200	-	Natural ≥40 PTV	Natural ≥36 PTV
8	SK 80x600 SK 80x1200	-	Natural ≥40 PTV	Natural ≥36 PTV

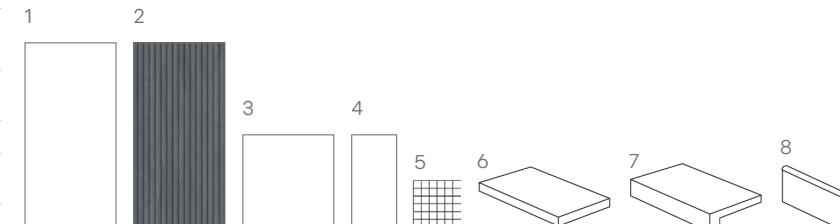

LRV and PTV values can vary batch to batch, please contact for advice. PTV values refer to Slider 96 Shod - Wet (unless stated). Swatch colours may vary, samples should be requested.

[www.grestec.co.uk](http://www.grestec.co.uk) | T: 0345 130 2241 | E: [sales@grestec.co.uk](mailto:sales@grestec.co.uk)  
Find us on:



# Erde

## Technical data sheet - ISO 10545 average values

2	Sizes	Conforms
3	Water absorption	Ev < 0.2% (Grupo/ Group Bla)
4	Bending strength Breaking strength	>=45 N/mm <sup>2</sup> >=2400 N
8	Linear thermal expansion	<9x10 <sup>-(6)</sup> °C <sup>-1</sup>
9	Linear thermal expansion	Conforms
11	Linear thermal expansion	Conforms
12	Frost resistance	Conforms
13	Chemical resistance	LA/HA A
14	Stain resistance	Class 5
	Pendulum test - Slider 96 (Shod) Wet	Natural ≥40 PTV Ultra Matt ≥45 PTV
	Pendulum test - Slider 55 (Barefoot) Wet	Natural ≥36 PTV Ultra Matt ≥45 PTV

## Sustainability information



## Cleaning and maintenance advice

### Initial washing

The initial washing is fundamental for good treatment results. The initial washing is aimed at removing any laying residues and building grime.  
Product: Deterdek Pro

### Routine maintenance

The aim of the routine maintenance is to remove dirt and scuff marks. Must be carried out regularly.  
Product: Cleaner Pro

### Special maintenance

Special maintenance is carried out in case of very stubborn dirt, when the routine maintenance is not enough to restore the original look of the surface.  
Product: PS/87 Pro

Please see [www.filasolutions.com](http://www.filasolutions.com) for methods of use, dilution and coverage.