

Material: Porcelain | Appearance: Stone | Application: Walls and Floors

6 Colours

2 Finishes

5 Tile sizes

Wealden Stone

Wealden Stone feature a weathered surface and tumbled edges that evoke a sense of heritage, providing an authentic natural stone look that brings organic warmth to any project. The palette of six neutral tones offers a versatile foundation for bespoke patterns or sleek, uniform layouts.



BOEA56407TUMB
LRV 57



BOEA56408TUMB
LRV 60



BOEA56411TUMB
LRV 40



RBEA55260TUMB
LRV: 55



RBEA55261TUMB
LRV: 51



RBEA55263TUMB
LRV: 53



Wealden Stone BOEA56407TUMB

LRV and PTV values may vary between batches; please contact us for guidance.
Swatch colours may differ from final production—samples are recommended.
www.grestec.co.uk | T: 0345 130 2241 | E: sales@grestec.co.uk
Find us on:






Wealden Stone







Wealden Stone BOEA56463ASTUMB

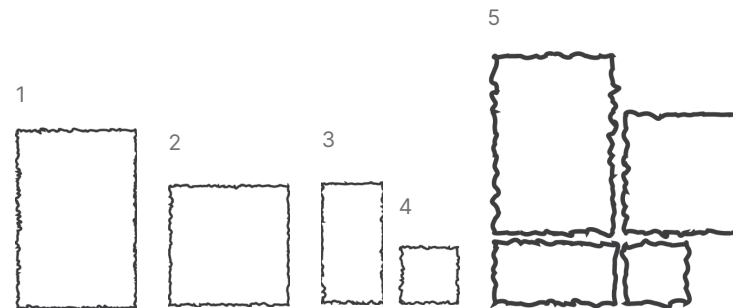Sizes (mm)	> <	 PTV Wet Slider 96	 PTV Wet Slider 55
1 600×900 TUMBLE	8.5	Natural ≥36 PTV Anti-slip ≥45 PTV	Natural 25-35 PTV Anti-slip ≥40 PTV
2 600×600 TUMBLE	8.5	Natural ≥36 PTV Anti-slip ≥45 PTV	Natural 25-35 PTV Anti-slip ≥40 PTV
3 300×600 TUMBLE	8.5	Natural ≥36 PTV Anti-slip ≥45 PTV	Natural 25-35 PTV Anti-slip ≥40 PTV
4 300×300 TUMBLE	8.5	Natural ≥36 PTV Anti-slip ≥45 PTV	Natural 25-35 PTV Anti-slip ≥40 PTV
5 TUMBLED MIX	8.5	Natural ≥36 PTV	Natural 25-35 PTV

Surface Roughness:
Anti-slip: Rz 56.38µm




LRV and PTV values may vary between batches; please contact us for guidance.
Swatch colours may differ from final production—samples are recommended.
www.grestec.co.uk | T: 0345 130 2241 | E: sales@grestec.co.uk


Find us on:    




Wealden Stone

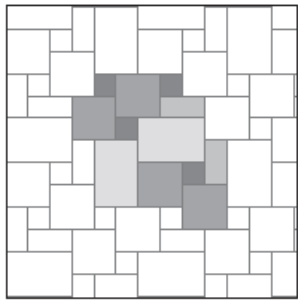


Layout 1
600×900: 33,3%
600×600: 44,5%
300×600: 11,1%
300×300: 11,1%

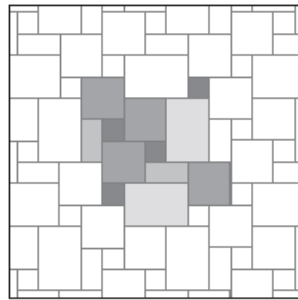


Layout 2
600×900: 33,3%
600×600: 44,5%
300×600: 11,1%
300×300: 11,1%

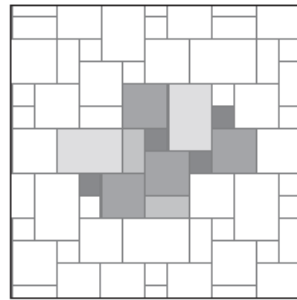


Layout 3
600×900: 33,3%
600×600: 44,5%
300×600: 11,1%
300×300: 11,1%

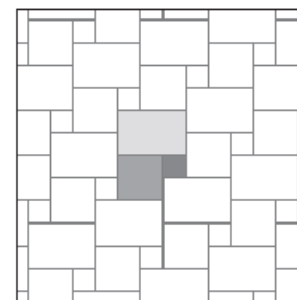

Layout 4
600×900: 54,5%
600×600: 36,5%
300×300: 9%

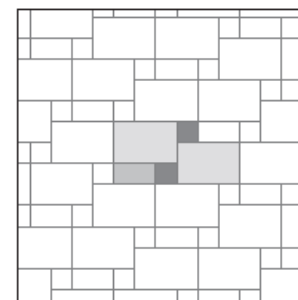



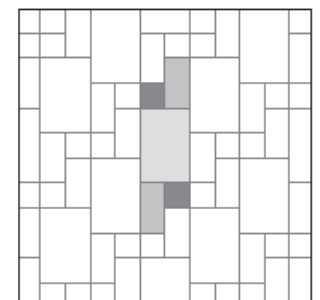

Layout 5
600×900: 75%
300×600: 12,5%
300×300: 12,5%



Layout 6
600×900: 50%
300×600: 33,4%
300×300: 16,6%

LRV and PTV values may vary between batches; please contact us for guidance.
Swatch colours may differ from final production—samples are recommended.
www.grestec.co.uk | T: 0345 130 2241 | E: sales@grestec.co.uk

Find us on:    



Wealden Stone



Above
Wealden Stone BOEA56411TUMB






Above
Wealden Stone RBEA55263ASTUMB



Wealden Stone

Technical data sheet - ISO 10545 average values

3	Water absorption	<0,1 %
4	Flexural strength	45 N/mm2
6	Resistance to deep abrasion	<150 mm²
12	Frost resistance	Resistant
13	Chemical resistance	Natural A-LA-HA Honed A-LB-HB
14	Stain resistance	Class 5
	Pendulum test - Slider 96 Shod (wet)	Natural ≥36PTV Anti-slip ≥45PTV Thick ≥45PTV
	Pendulum test - Slider 55 Barefoot (wet)	Natural 25-35PTV Anti-slip ≥40PTV Thick ≥40PTV
	Surface Roughness	Anti-slip Rz 56.38µm

Sustainability information



Cleaning and maintenance advice

Initial washing

The initial washing is fundamental for good treatment results. The initial washing is aimed at removing any laying residues and building grime.

Product: Deterdek Pro

Routine maintenance

The aim of the routine maintenance is to remove dirt and scuff marks. Must be carried out regularly.

Product: Cleaner Pro

Special maintenance

Special maintenance is carried out in case of very stubborn dirt, when the routine maintenance is not enough to restore the original look of the surface.

Product: PS/87 Pro

Please see www.filasolutions.com for methods of use, dilution and coverage.

LRV and PTV values may vary between batches; please contact us for guidance.

Swatch colours may differ from final production—samples are recommended.

www.grestec.co.uk | T: 0345 130 2241 | E: sales@grestec.co.uk

Find us on: 