

Kesel

5 Colours | 3 Finish | 10 Size

Kesel porcelain tiles deliver a sophisticated stone-effect aesthetic, available across a comprehensive range of formats from expansive large-slab wall coverings down to detailed mosaics. Spanning five versatile neutral tones with subtle natural variation and flecks, this durable, high-performance collection brings seamless elegance and reliable slip resistance to sophisticated commercial and residential spaces.




PDF A54564



PDF A54565



PDF A54566




PDF A54567



PDF A54568



Kesel

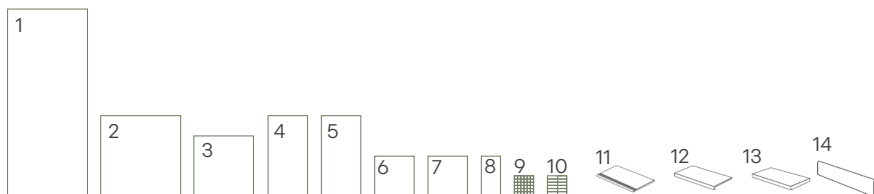

Size (mm)		> <	SHOD PTV WET SLIDER 96	BAREFOOT PTV WET SLIDER 55	Finishes
1 1200×2780	6		Natural ≥36PTV	Natural 25-35 PTV	All colours
2 1200×1200	9		Natural ≥36PTV	Natural 25-35 PTV	All colours
3 900×900	9		Natural ≥36PTV	Natural 25-35 PTV	All colours
4 600×1200	9		Natural ≥36PTV Structured ≥40PTV	Natural 25-35 PTV Structured ≥40PTV	All colours
5 600×1200	20		Thick ≥45PTV	Thick ≥45PTV	PDFA54565, 68
6 600×600	9		Natural ≥36PTV Structured	Natural 25-35 PTV Structured ≥40PTV	All colours
7 600×600	20		Thick ≥45PTV	Thick ≥45PTV	PDFA54565, 68
8 300×600	9		Natural ≥36PTV Structured ≥40PTV	Natural 25-35 PTV Structured ≥40PTV	All colours
9 50×50 mosaic 300×300	9		Natural ≥36PTV	Natural 25-35 PTV	All colours
10 50×150 mosaic 300×300	9		Natural ≥36PTV	Natural 25-35 PTV	All colours
11 300×600 ST 300×1200 ST	9		Natural ≥36PTV	Natural 25-35 PTV	All colours
12 330×1200×40 ST2	9		Natural ≥36PTV	Natural 25-35 PTV	All colours
13 330×1200×40 ST ANG	9		Natural ≥36PTV	Natural 25-35 PTV	All colours
14 70×600 SK 70×1200 SK	9		Natural ≥36PTV	Natural 25-35 PTV	All colours



0345 130 2241 | sales@grestec.co.uk | www.grestec.co.uk




Kesel PDF A54568



Above: Kesel PDFA54564
Right: Kesel PDFA54565



Above: Kesel PDFA54566

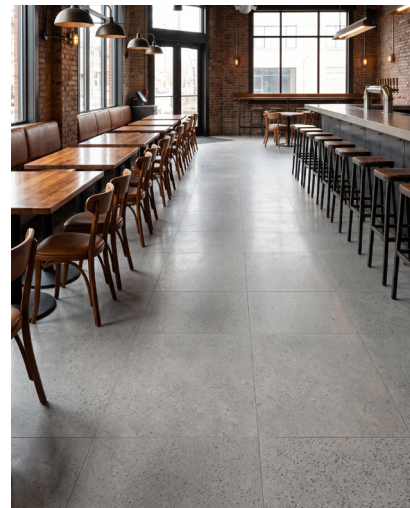

ISO 10545 Results

3	Water absorption	< 0,1%
4	Flexural strength	45 N/mm ²
6	Wear and abrasion resistance	≤ 150 mm ³
8	Linear thermal expansion	6 × 10 ⁻⁶
12	Frost resistance	Resistance
14	Stain resistance	Class 4-5

Slip rating

Pendulum test - Slider 96 (Shod) Wet	Natural ≥36 PTV Structured ≥40 PTV Thick ≥45 PTV
Pendulum test - Slider 55 (Barefoot) Wet	Natural 25-35 PTV Structured ≥40 PTV Thick ≥45 PTV

Cleaning and maintenance advice

Initial washing

The initial washing is fundamental for good treatment results. The initial washing is aimed at removing any laying residues and building grime.

Product: Cloth

Routine maintenance

The aim of the routine maintenance is to remove dirt and scuff marks. Must be carried out regularly.

Product: Cleaner Pro

Please see www.filasolutions.com for methods of use, dilution and coverage.

LRVs and PTVs

LRV and PTV values may vary between batches; please contact us for guidance. Swatch colours may differ from final production, samples are recommended.

Document + web colours

Swatch colours may differ from final production, samples are recommended.

Sustainability



Shade variation

