



# Woodale

6 Colours | 2 Finish | 5 Size

Woodale porcelain tiles capture the authentic warmth and intricate grain of natural timber. Available across an extensive array of formats, ranging from classic planks up to an expansive 300×2400mm size, alongside a heavy-duty 20mm thick option for seamless indoor-to-outdoor transitions. Offered in a curated palette of refined wood tones complete with a reliable slip-resistant finish, this collection brings enduring organic character and modern performance to contemporary commercial and residential environments.




PDFB54569




PDFB54570




PDFB54571

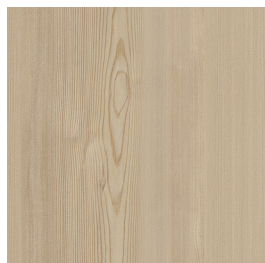

PDFB54572

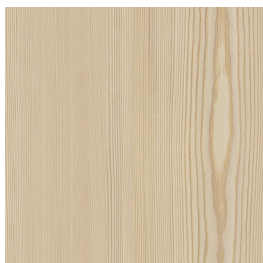

PDFB54573

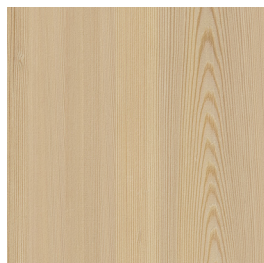


PDFB54574





# Woodale

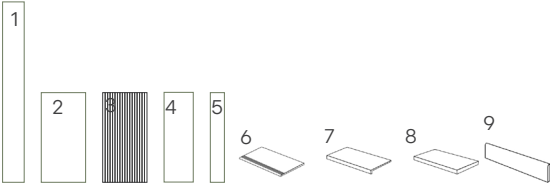

| Size (mm) |                           | >  < |  |  | Availability      |
|-----------|---------------------------|------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-------------------|
| 1         | 300×2400                  | 9    | Natural ≥40PTV                                                                    | Natural 25-35 PTV                                                                 | All colours       |
| 2         | 600×1200                  | 9    | Natural ≥40PTV                                                                    | Natural 25-35 PTV                                                                 | All colours       |
| 3         | 600×1200 T1               | 9    | Natural                                                                           | Natural                                                                           | All colours       |
| 4         | 400×1200                  | 20   | Thick ≥45PTV                                                                      | Thick ≥45PTV                                                                      | PDFB54570, 72, 73 |
| 5         | 200×1200                  | 9    | Natural ≥40PTV                                                                    | Natural 25-35 PTV                                                                 | All colours       |
| 6         | 300×600 ST<br>300×1200 ST | 9    | Natural ≥40PTV                                                                    | Natural 25-35 PTV                                                                 | All colours       |
| 7         | 330×1200×40 ST            | 9    | Natural ≥40PTV                                                                    | Natural 25-35 PTV                                                                 | All colours       |
| 8         | 330×1200×40 ST ANG        | 9    | Natural ≥40PTV                                                                    | Natural 25-35 PTV                                                                 | All colours       |
| 9         | 70×600 SK<br>70×1200 SK   | 9    | Natural ≥40PTV                                                                    | Natural 25-35 PTV                                                                 | All colours       |



0345 130 2241 | sales@grestec.co.uk | www.grestec.co.uk



Woodale PDFB54573





Above: Woodale PDFB54574  
Right: Woodale PDFB54570THK



Above: Woodale PDFB54571



## ISO 10545 Results

|    |                                     |                       |
|----|-------------------------------------|-----------------------|
| 3  | <b>Water absorption</b>             | < 0,1%                |
| 4  | <b>Flexural strength</b>            | 45 N/mm <sup>2</sup>  |
| 6  | <b>Wear and abrasion resistance</b> | ≤ 150 mm <sup>3</sup> |
| 8  | <b>Linear thermal expansion</b>     | 6 × 10 <sup>-6</sup>  |
| 12 | <b>Frost resistance</b>             | Resistance            |
| 14 | <b>Stain resistance</b>             | Class 4-5             |

## Slip rating

|                                                 |                                   |
|-------------------------------------------------|-----------------------------------|
| <b>Pendulum test - Slider 96 (Shod) Wet</b>     | Natural ≥40 PTV<br>Thick ≥45PTV   |
| <b>Pendulum test - Slider 55 (Barefoot) Wet</b> | Natural 25-35 PTV<br>Thick ≥45PTV |

## Cleaning and maintenance advice

### Initial washing

The initial washing is fundamental for good treatment results. The initial washing is aimed at removing any laying residues and building grime.

Product: Cloth

### Routine maintenance

The aim of the routine maintenance is to remove dirt and scuff marks. Must be carried out regularly.

Product: Cleaner Pro

Please see [www.filasolutions.com](http://www.filasolutions.com) for methods of use, dilution and coverage.

## LRVs and PTVs

*LRV and PTV values may vary between batches; please contact us for guidance.*

## Document + web colours

*Swatch colours may differ from final production, samples are recommended.*

## Sustainability



## Shade variation

