

Heart of Corlith

4 Colours | 4 Finishes | 15 Sizes

Heart of Corlith brings refined stone aesthetics and extensive modularity to high-end residential and commercial spaces. Featuring a palette of four warm neutral tones, this collection offers exceptional design flexibility through a vast array of formats—from large-format slabs to tumbled modular tiles and decorative sub-formats—making it ideal for creating intricate floor compositions, herringbone layouts, and seamless indoor-outdoor designs.



FAIP42148



FAIP42149




FAIP42150



FAIP42151



Heart of Corlith

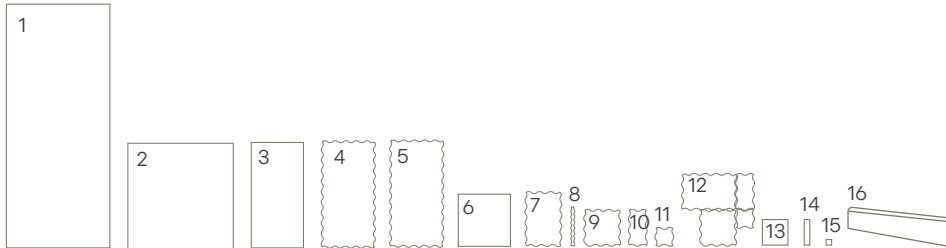

Size (mm)	Thickness		Availability
1 1200×2780	6.5	Lappato	All colours
2 1200×1200	8.5	Natural ≥36 PTV Lappato	All colours
3 600×1200	8.5	Natural Lappato Anti-slip	All colours
4 600×1200 TUMB	8.5	Natural ≥36 PTV Anti-slip	All colours
5 600×1200 TUMBTHK	20	Thick	All colours
6 600×600	8.5	Natural ≥36 PTV Lappato	All colours
7 406×609 TUMB	8.5	Natural ≥36 PTV Anti-slip	All colours FAIP42150-51
8 406×406 TUMB	8.5	Natural ≥36 PTV Anti-slip	All colours FAIP42150-51
9 48×450 TUMB	9.5	Natural ≥36 PTV	All colours
10 203×203 TUMB	8.5	Natural ≥36 PTV Anti-slip	All colours FAIP42150-51
11 203×406 TUMB	8.5	Natural ≥36 PTV Anti-slip	All colours FAIP42150-51
12 TUMB MIX	8.5	Natural ≥36 PTV Anti-slip	All colours FAIP42150-51
13 300×300	8.5	Natural ≥36 PTV	All colours
14 75×300	8.5	Natural ≥36 PTV	All colours
15 75×75	8.5	Natural ≥36 PTV	All colours
16 65×1200 SK	8.5	Natural ≥36 PTV	All colours



0345 130 2241 | sales@grestec.co.uk | www.grestec.co.uk



Heart of Corlith FAIP42150TUMB

Heart of Corlith




Above: Heart of Corlith FAIP42148TUMB FAIP-42149TUMB
Right: Heart of Corlith FAIP42148 FAIP42149




Above: Heart of Corlith FAIP42148 FAIP42150

Heart of Corlith

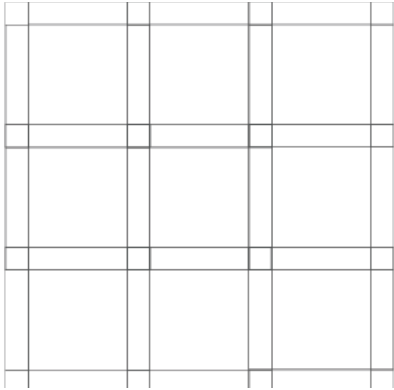


Comp 1		
300×300		64%
75×300		32%
75×75		4%

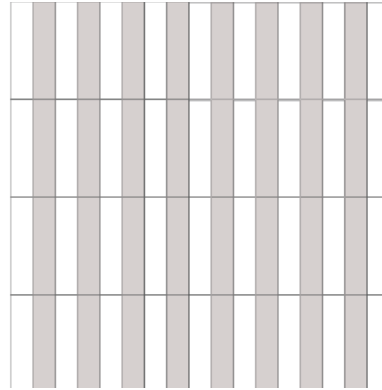

Comp 2		
75×300		50%
75×300		50%



Comp 3		
75×300		50%
75×300		50%

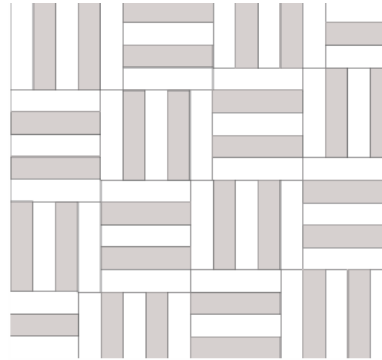

Comp 4		
75×300		50%
75×300		50%



Heart of Corlith



ISO 10545 Results

2	Sizes	Conforms
3	Water absorption	Conforms
4	Bending strength	> 38 N/mm ²
5	Shock resistance	COR > 0,73
8	Coefficient of linear thermal expansion	$\alpha_l \leq 7 \cdot 10^{-6}/^{\circ}\text{C}$
9	Resistance to thermal shock	Resistant
11	Crazing resistance	Resistant
12	Frost resistance	Resistant
13	Chemical resistance	Class A
14	Stain resistance	Class 5
	Pendulum test - Slider 96 (Shod) Wet	Natural ≥ 36 PTV

Cleaning and maintenance advice

Initial washing

The initial washing is fundamental for good treatment results. The initial washing is aimed at removing any laying residues and building grime.

Product: Deterdek Pro

Routine maintenance

The aim of the routine maintenance is to remove dirt and scuff marks. Must be carried out regularly.

Product: Cleaner Pro

Special maintenance

Special maintenance is carried out in case of very stubborn dirt, when the routine maintenance is not enough to restore the original look of the surface.

Product: PS/87 Pro

Please see www.filasolutions.com for methods of use, dilution and coverage.

LRVs and PTVs

LRV and PTV values may vary between batches; please contact us for guidance.

Document + web colours

Swatch colours may differ from final production, samples are recommended.

Sustainability



Shade variation

