

Pitchstone

4 Colours | 1 Finish | 3 Sizes

Pitchstone offers an authentic, stone-effect surface featuring rich texture and subtle natural shading. Engineered for both indoor and outdoor commercial and residential environments, this versatile range delivers high performance with a refined aesthetic.



LKAC52262



LKAC52263




LKAC52264



LKAC52265



Pitchstone

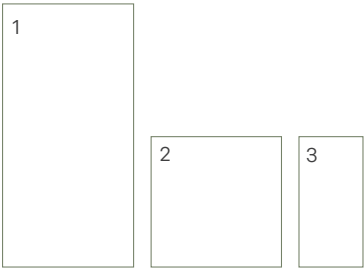

Size (mm)		Thickness		
1	600×1200	10	Ultra Matt ≥40PTV	Ultra Matt ≥38PTV
2	600×600	9.5	Ultra Matt ≥40PTV	Ultra Matt ≥38PTV
3	300×600	8.7	Ultra Matt ≥40PTV	Ultra Matt ≥38PTV



Pitchstone



ISO 10545 Results

2	Sizes	Conforms
3	Water absorption	$\leq 0,5\%$
4	Bending strength	$>1300 \text{ N}$
4	Modulus of rupture	$N \geq 35 \text{ N/mm}^2$
9	Resistance to thermal shock	Resistant
11	Crazing resistance	Resistant
12	Frost resistance	Resistant
13	Chemical resistance	Class A
14	Stain resistance	Class 5

Slip resistance

Pendulum test - Slider 96 (Shod) Wet	Ultra Matt $\geq 40\text{PTV}$
---	--------------------------------

Pendulum test - Slider 55 (Barefoot) Wet	Ultra Matt $\geq 38\text{PTV}$
---	--------------------------------

Cleaning and maintenance advice

Initial washing

The initial washing is fundamental for good treatment results. The initial washing is aimed at removing any laying residues and building grime.

Product: Deterdek Pro

Routine maintenance

The aim of the routine maintenance is to remove dirt and scuff marks. Must be carried out regularly.

Product: Cleaner Pro

Special maintenance

Special maintenance is carried out in case of very stubborn dirt, when the routine maintenance is not enough to restore the original look of the surface.

Product: PS/87 Pro

Please see www.filasolutions.com for methods of use, dilution and coverage.

LRVs and PTVs

LRV and PTV values may vary between batches; please contact us for guidance.

Document + web colours

Swatch colours may differ from final production, samples are recommended.

Sustainability



Shade variation

